

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P746463

Luminaire Tested: LD4D30D010-EU4DR6020359030-4LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P746463
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D30D010-EU4DR6020359030-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2685.7 lumens
Efficiency: N/A
Efficacy: 92.6 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 29
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P746463
CATALOG NUMBER: LD4D30D010-EU4DR6020359030-4LBDP1H

Luminous Intensity Polar Plot

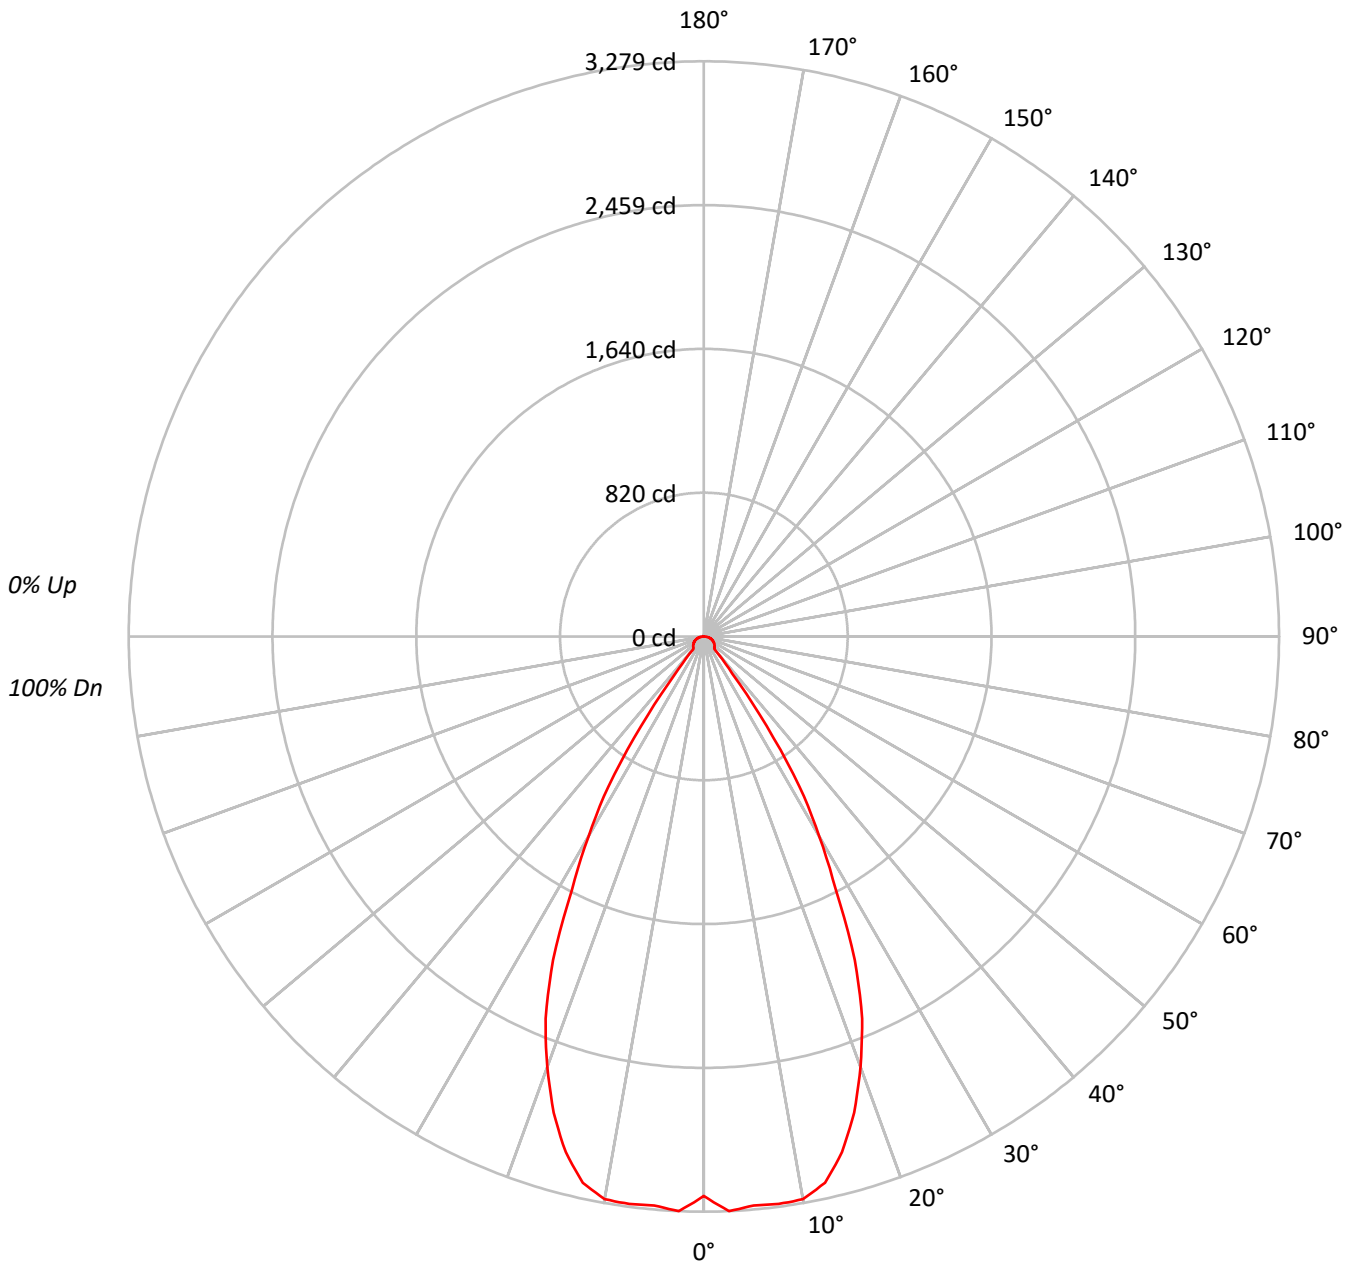



TEST NUMBER: P746463

CATALOG NUMBER: LD4D30D010-EU4DR6020359030-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93				93															
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86				86															
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80				80															
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75				75															
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70				70															
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66				66															
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62				62															
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59				59															
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55				55															
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53				53															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	348509
5°	357079
10°	361385
15°	344277
20°	303542
25°	245512
30°	166069
35°	83217
40°	13507
45°	13211
50°	13479
55°	13677
60°	14051
65°	14374
70°	14727
75°	14902
80°	14346
85°	12035

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 14902 cd/sqm



TEST NUMBER: P746463

CATALOG NUMBER: LD4D30D010-EU4DR6020359030-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	311.2	11.6
10°-20°	841.9	31.3
20°-30°	905.8	33.7
30°-40°	393.7	14.7
40°-50°	66.1	2.5
50°-60°	64.3	2.4
60°-70°	55.0	2.0
70°-80°	36.8	1.4
80°-90°	11.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2058.8	76.7
0°-40°	2452.5	91.3
0°-60°	2583.0	96.2
0°-90°	2685.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2685.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3190	
5°	3256	311
15°	3044	842
25°	2036	906
35°	624	394
45°	86	66
55°	72	64
65°	56	55
75°	35	37
85°	10	11
90°	0	



TEST NUMBER: P746463

CATALOG NUMBER: LD4D30D010-EU4DR6020359030-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	3189.7
2.5°	3279.3
5°	3255.7
7.5°	3263.2
10°	3257.3
12.5°	3190.1
15°	3043.6
17.5°	2846.8
20°	2610.6
22.5°	2357.8
25°	2036.5
27.5°	1628.9
30°	1316.3
32.5°	1014.5
35°	623.9
37.5°	266.9
40°	94.7
42.5°	87.1
45°	85.5
47.5°	82.6
50°	79.3
52.5°	75.6
55°	71.8
57.5°	68.1
60°	64.3
62.5°	60.2
65°	55.6
67.5°	51.0
70°	46.1
72.5°	40.7
75°	35.3
77.5°	29.0
80°	22.8
82.5°	16.2
85°	9.6
87.5°	3.3
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)