

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P746542

Luminaire Tested: LD4D30D010-EU4DR6520359030-4LBDP1LI

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P746542
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D30D010-EU4DR6520359030-4LBDP1LI
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2464.1 lumens
Efficiency: N/A
Efficacy: 85.0 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 29
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P746542
CATALOG NUMBER: LD4D30D010-EU4DR6520359030-4LBDP1LI

Luminous Intensity Polar Plot

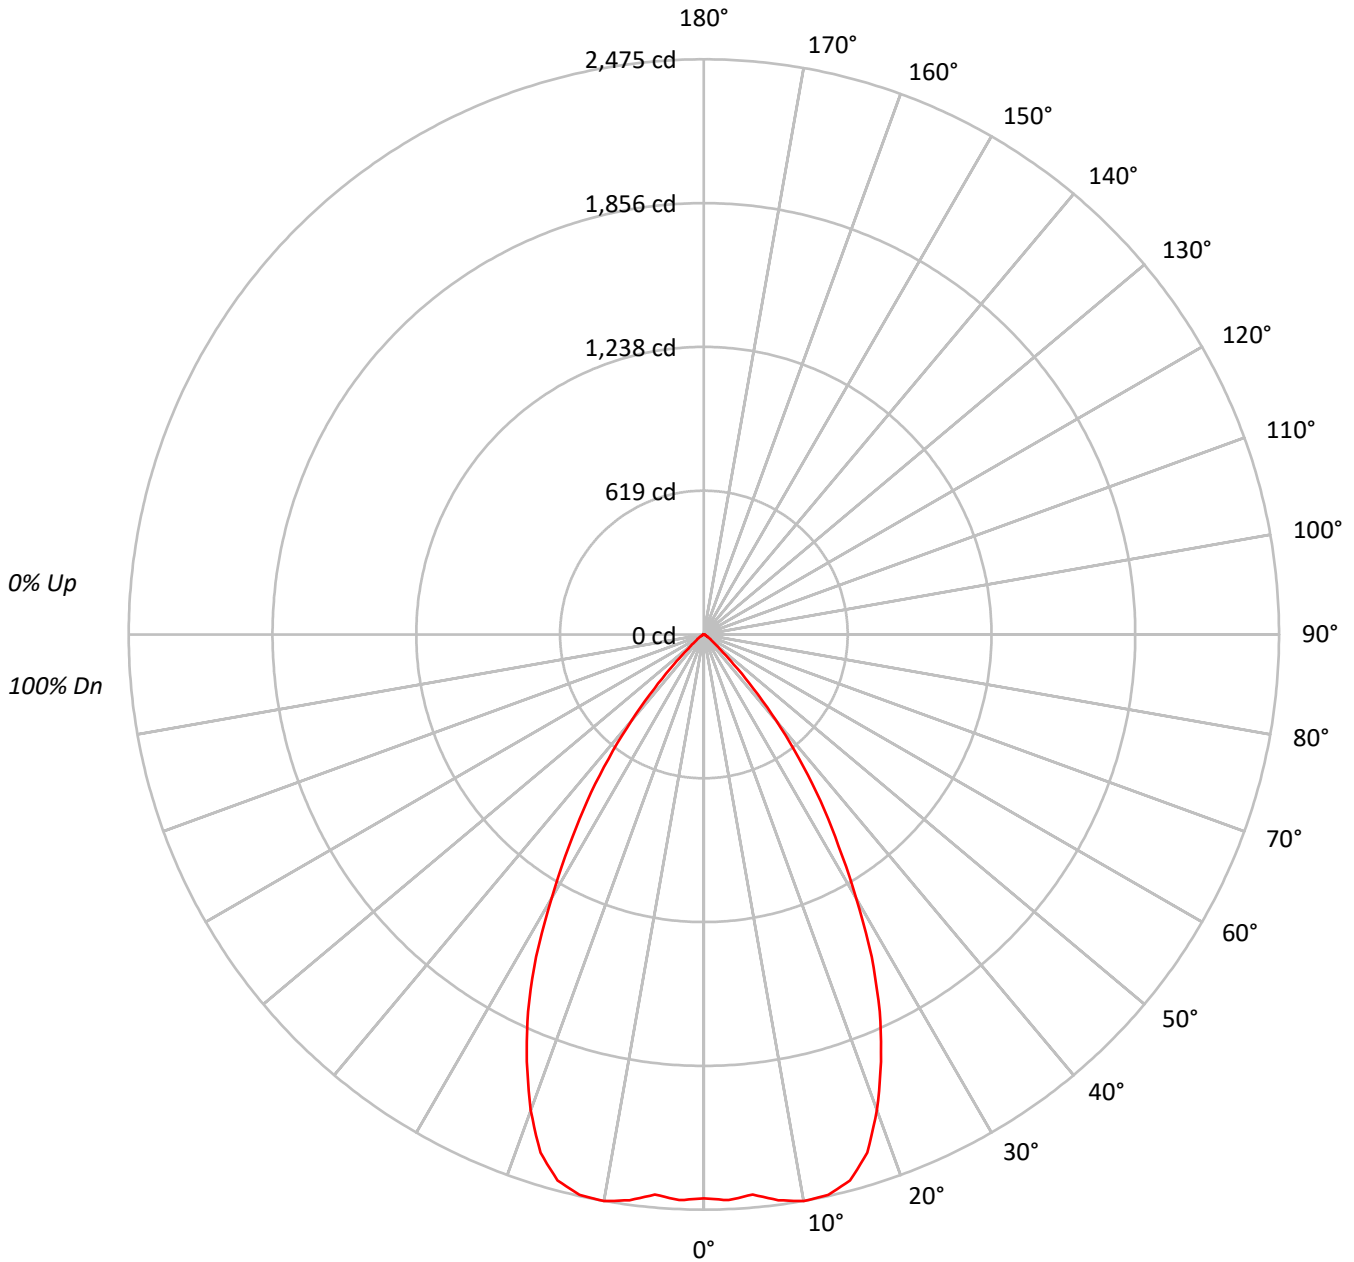



TEST NUMBER: P746542

CATALOG NUMBER: LD4D30D010-EU4DR6520359030-4LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	265067
5°	265289
10°	274636
15°	275085
20°	253266
25°	215795
30°	165198
35°	116710
40°	68890
45°	27968
50°	10131
55°	5639
60°	3234
65°	1784
70°	1853
75°	1435
80°	1510
85°	1254

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 27968 cd/sqm



TEST NUMBER: P746542

CATALOG NUMBER: LD4D30D010-EU4DR6520359030-4LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	233.6	9.5
10°-20°	673.9	27.3
20°-30°	808.5	32.8
30°-40°	543.3	22.1
40°-50°	162.7	6.6
50°-60°	28.7	1.2
60°-70°	8.1	0.3
70°-80°	4.0	0.2
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1716.0	69.6
0°-40°	2259.3	91.7
0°-60°	2450.7	99.5
0°-90°	2464.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2464.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2426	
5°	2419	234
15°	2432	674
25°	1790	809
35°	875	543
45°	181	163
55°	30	29
65°	7	8
75°	3	4
85°	1	1
90°	0	



TEST NUMBER: P746542
CATALOG NUMBER: LD4D30D010-EU4DR6520359030-4LBDP1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	2426.0
2.5°	2436.4
5°	2418.8
7.5°	2455.4
10°	2475.4
12.5°	2470.6
15°	2431.9
17.5°	2337.5
20°	2178.2
22.5°	1990.7
25°	1790.0
27.5°	1563.5
30°	1309.4
32.5°	1079.1
35°	875.0
37.5°	673.3
40°	483.0
42.5°	315.5
45°	181.0
47.5°	95.9
50°	59.6
52.5°	41.4
55°	29.6
57.5°	21.4
60°	14.8
62.5°	9.6
65°	6.9
67.5°	6.2
70°	5.8
72.5°	4.5
75°	3.4
77.5°	3.1
80°	2.4
82.5°	1.7
85°	1.0
87.5°	0.7
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)