

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P746547

Luminaire Tested: LD4D30D010-EU4DR6520359030-4LBS1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P746547  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D30D010-EU4DR6520359030-4LBS1MW  
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2347.3 lumens  
Efficiency: N/A  
Efficacy: 80.9 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 29  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P746547  
CATALOG NUMBER: LD4D30D010-EU4DR6520359030-4LBS1MW

### Luminous Intensity Polar Plot

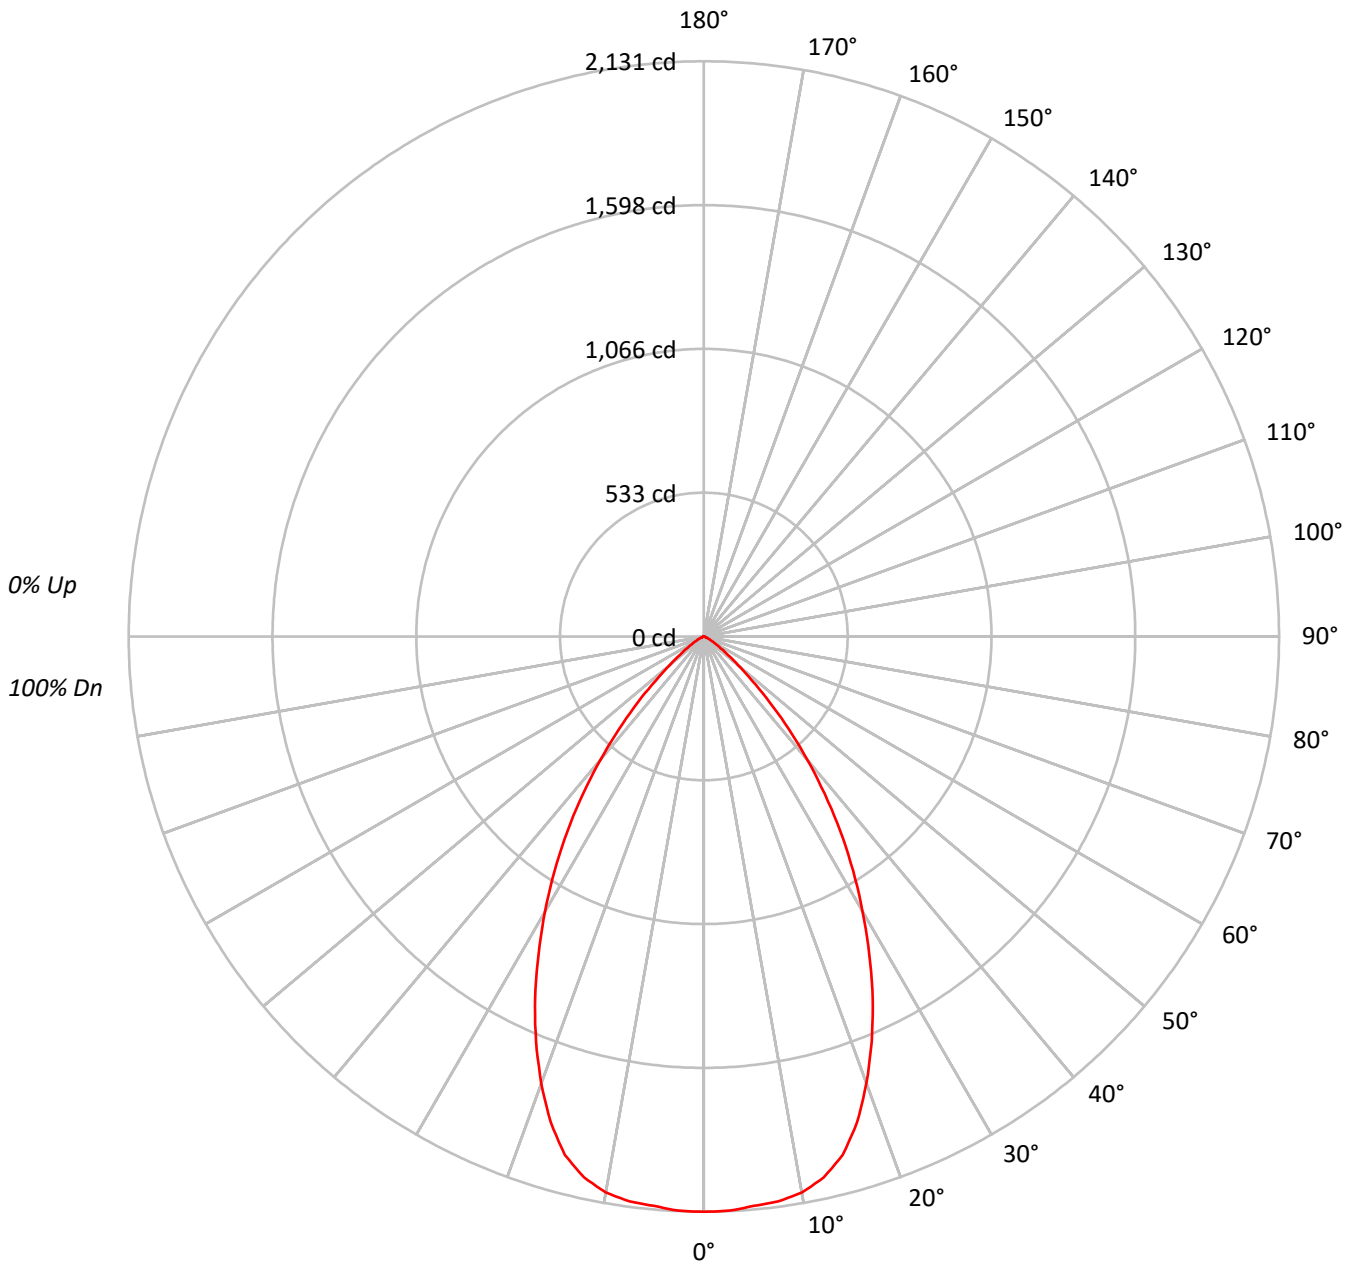



TEST NUMBER: P746547

CATALOG NUMBER: LD4D30D010-EU4DR6520359030-4LBS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	124476
5°	124160
10°	124054
15°	120233
20°	109456
25°	95386
30°	79335
35°	62863
40°	45371
45°	28661
50°	14937
55°	7942
60°	4170
65°	2294
70°	956
75°	1061
80°	740
85°	603

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 28661 cd/sqm



TEST NUMBER: P746547

CATALOG NUMBER: LD4D30D010-EU4DR6520359030-4LBS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	201.5	8.6
10°-20°	551.9	23.5
20°-30°	674.7	28.7
30°-40°	547.4	23.3
40°-50°	272.8	11.6
50°-60°	76.1	3.2
60°-70°	17.3	0.7
70°-80°	4.5	0.2
80°-90°	1.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1428.1	60.8
0°-40°	1975.5	84.2
0°-60°	2324.4	99.0
0°-90°	2347.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2347.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2131	
5°	2118	202
15°	1988	552
25°	1480	675
35°	882	547
45°	347	273
55°	78	76
65°	17	17
75°	5	5
85°	1	1
90°	0	



TEST NUMBER: P746547

CATALOG NUMBER: LD4D30D010-EU4DR6520359030-4LBS1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2131.3
2.5°	2129.7
5°	2117.8
7.5°	2110.9
10°	2091.8
12.5°	2053.0
15°	1988.5
17.5°	1887.6
20°	1761.1
22.5°	1624.5
25°	1480.2
27.5°	1325.8
30°	1176.4
32.5°	1028.8
35°	881.7
37.5°	734.8
40°	595.1
42.5°	464.1
45°	347.0
47.5°	241.8
50°	164.4
52.5°	113.4
55°	78.0
57.5°	52.6
60°	35.7
62.5°	24.8
65°	16.6
67.5°	8.5
70°	5.6
72.5°	5.3
75°	4.7
77.5°	3.2
80°	2.2
82.5°	1.5
85°	0.9
87.5°	0.6
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)