

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745858

Luminaire Tested: LD4D30D010-EU4DR2015309035-4LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P745858
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D30D010-EU4DR2015309035-4LBS1MW
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2996.0 lumens
Efficiency: N/A
Efficacy: 103.3 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 29
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P745858
CATALOG NUMBER: LD4D30D010-EU4DR2015309035-4LBS1MW

Luminous Intensity Polar Plot

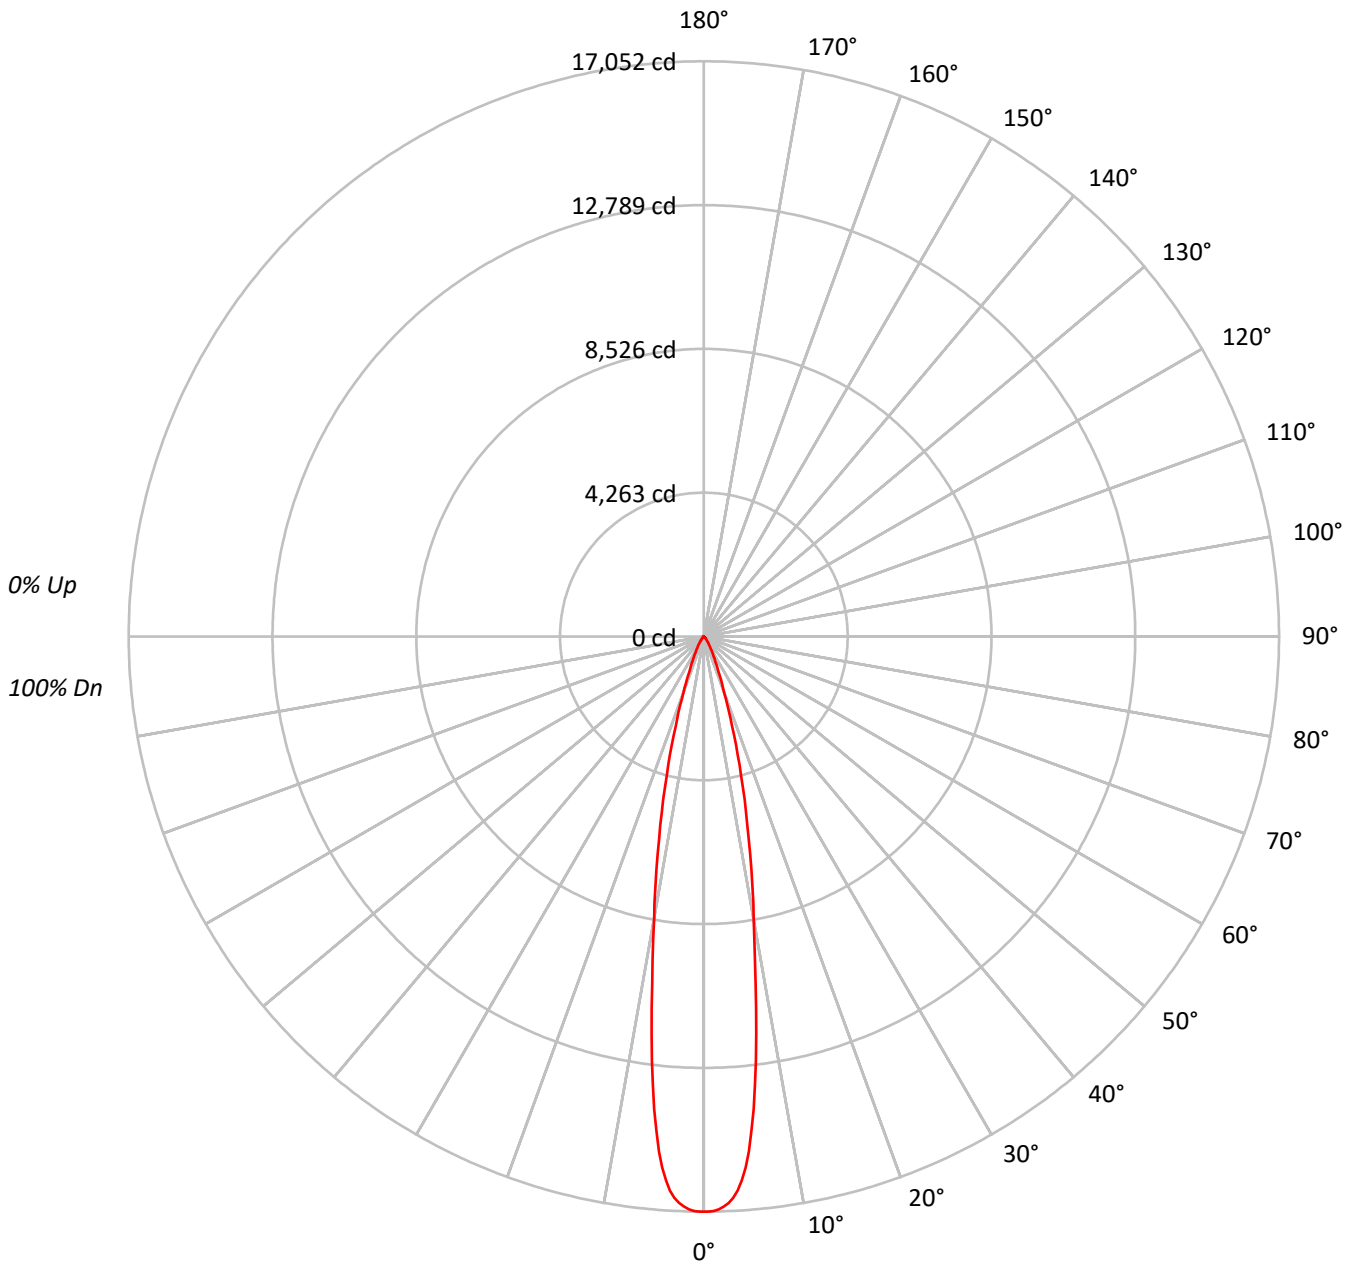



TEST NUMBER: P745858

CATALOG NUMBER: LD4D30D010-EU4DR2015309035-4LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	97																
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	98	94																
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	95	91																
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	93	89																
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	91	86																
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	88	84																
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	86	82																
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	84	80																
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	82	78																
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	81	76																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1863169
5°	1680927
10°	943432
15°	479563
20°	203047
25°	93732
30°	49620
35°	26730
40°	14292
45°	8452
50°	4912
55°	2610
60°	1661
65°	1189
70°	479
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 8452 cd/sqm



TEST NUMBER: P745858

CATALOG NUMBER: LD4D30D010-EU4DR2015309035-4LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1214.1	40.5
10°-20°	1195.5	39.9
20°-30°	390.6	13.0
30°-40°	133.0	4.4
40°-50°	44.7	1.5
50°-60°	13.5	0.4
60°-70°	4.5	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2800.2	93.5
0°-40°	2933.2	97.9
0°-60°	2991.3	99.8
0°-90°	2996.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2996.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	17052	
5°	15326	###
15°	4240	1196
25°	778	391
35°	200	133
45°	55	45
55°	14	13
65°	5	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P745858
CATALOG NUMBER: LD4D30D010-EU4DR2015309035-4LBS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	17052.5
0.5°	17052.5
1°	17031.3
1.5°	16988.8
2°	16911.3
2.5°	16808.1
3°	16662.3
3.5°	16458.8
4°	16156.6
4.5°	15789.2
5°	15326.0
5.5°	14717.1
6°	14093.0
6.5°	13377.8
7°	12677.8
7.5°	11857.8
8°	11125.9
8.5°	10389.4
9°	9709.2
9.5°	9085.1
10°	8503.5
12.5°	6105.8
15°	4239.6
17.5°	2769.7
20°	1746.3
22.5°	1131.3
25°	777.5
27.5°	546.7
30°	393.3
32.5°	282.4
35°	200.4
37.5°	139.7
40°	100.2
42.5°	72.9
45°	54.7
47.5°	42.5
50°	28.9
52.5°	18.2
55°	13.7
57.5°	10.6
60°	7.6
62.5°	6.1
65°	4.6



TEST NUMBER: P745858
CATALOG NUMBER: LD4D30D010-EU4DR2015309035-4LBS1MW

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



67.5°		3.0
70°		1.5

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)