

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745935

Luminaire Tested: LD4D30D010-EU4DR2520359035-4LBS1LI

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P745935  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D30D010-EU4DR2520359035-4LBS1LI  
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 25° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2792.1 lumens  
Efficiency: N/A  
Efficacy: 96.3 lumens/watt  
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.45  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 29  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P745935  
CATALOG NUMBER: LD4D30D010-EU4DR2520359035-4LBS1LI

### Luminous Intensity Polar Plot

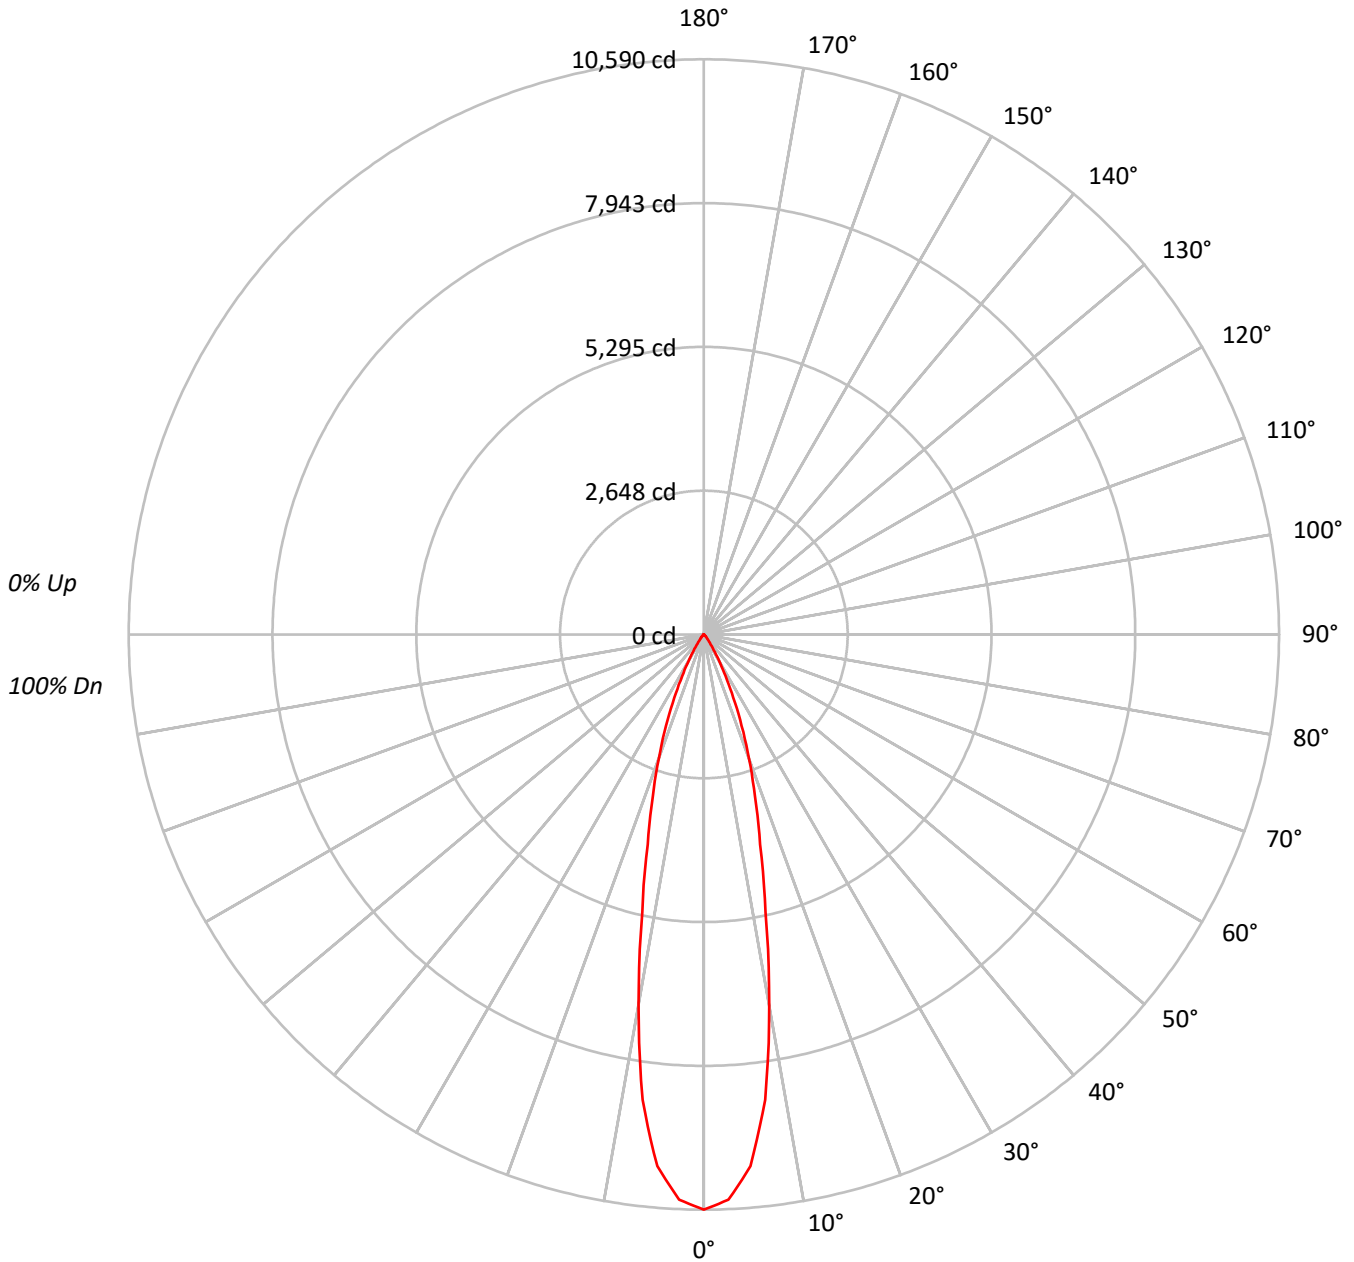



TEST NUMBER: P745935

CATALOG NUMBER: LD4D30D010-EU4DR2520359035-4LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	97	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	93	89	86	98	93	89	86	91	87	85	89	86	84	88	85	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	93	87	82	79	92	86	82	79	85	81	78	84	80	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1157060
5°	1077653
10°	768725
15°	452743
20°	281706
25°	154601
30°	70702
35°	26783
40°	12124
45°	7293
50°	3026
55°	1962
60°	1355
65°	931
70°	160
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 7293 cd/sqm



TEST NUMBER: P745935

CATALOG NUMBER: LD4D30D010-EU4DR2520359035-4LBS1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	844.4	30.2
10°-20°	1143.7	41.0
20°-30°	605.2	21.7
30°-40°	149.4	5.4
40°-50°	36.5	1.3
50°-60°	9.6	0.3
60°-70°	3.2	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2593.4	92.9
0°-40°	2742.8	98.2
0°-60°	2788.9	99.9
0°-90°	2792.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2792.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	10590	
5°	9826	844
15°	4002	1144
25°	1282	605
35°	201	149
45°	47	36
55°	10	10
65°	4	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P745935

CATALOG NUMBER: LD4D30D010-EU4DR2520359035-4LBS1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	10589.9
2.5°	10415.8
5°	9825.6
7.5°	8639.8
10°	6928.8
12.5°	5237.7
15°	4002.5
17.5°	3119.4
20°	2422.8
22.5°	1817.0
25°	1282.4
27.5°	860.0
30°	560.4
32.5°	341.0
35°	200.8
37.5°	122.8
40°	85.0
42.5°	65.0
45°	47.2
47.5°	28.5
50°	17.8
52.5°	12.9
55°	10.3
57.5°	8.0
60°	6.2
62.5°	4.9
65°	3.6
67.5°	1.3
70°	0.5
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)