

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P746476

Luminaire Tested: LD4D30D010-EU4DR6020359035-4LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P746476
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D30D010-EU4DR6020359035-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2835.3 lumens
Efficiency: N/A
Efficacy: 97.8 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 29
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P746476
CATALOG NUMBER: LD4D30D010-EU4DR6020359035-4LBDP1H

Luminous Intensity Polar Plot

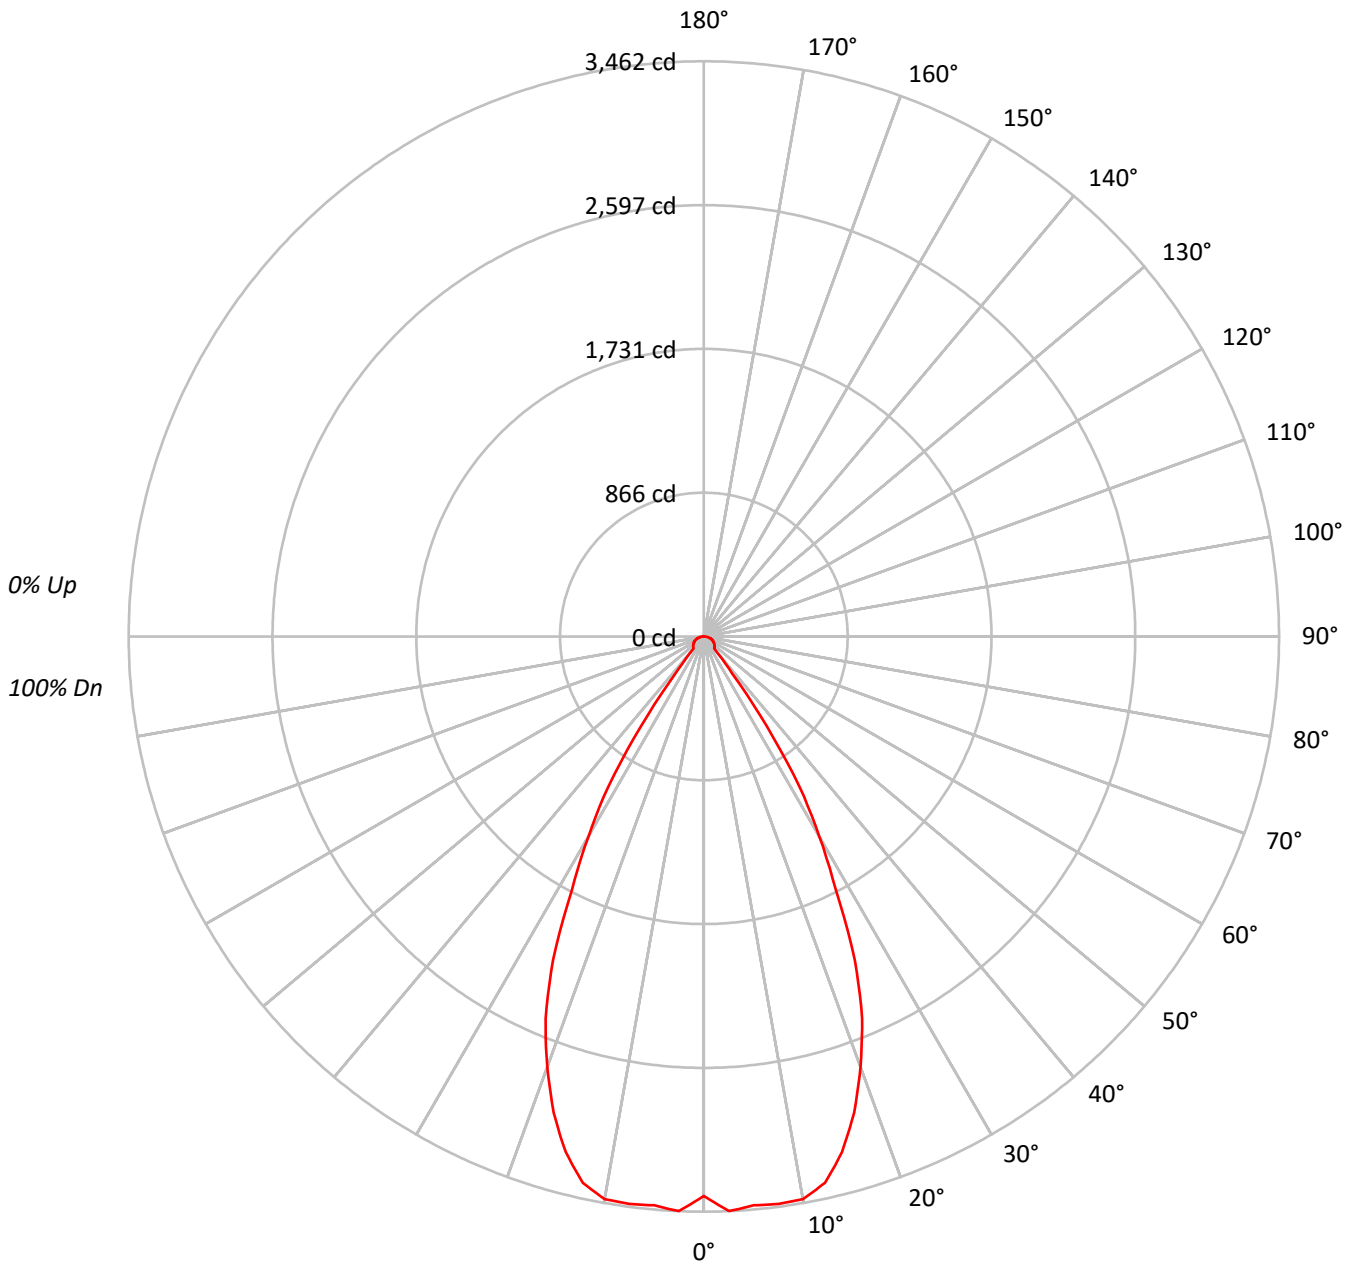



TEST NUMBER: P746476

CATALOG NUMBER: LD4D30D010-EU4DR6020359035-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93			93																
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86			86																
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80			80																
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75			75																
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70			70																
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66			66																
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62			62																
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59			59																
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			55																
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53			53																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	367914
5°	376964
10°	381511
15°	363450
20°	320448
25°	259183
30°	175317
35°	87859
40°	14249
45°	13953
50°	14227
55°	14439
60°	14859
65°	15176
70°	15526
75°	15704
80°	15164
85°	12662

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 15704 cd/sqm



TEST NUMBER: P746476

CATALOG NUMBER: LD4D30D010-EU4DR6020359035-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	328.5	11.6
10°-20°	888.7	31.3
20°-30°	956.2	33.7
30°-40°	415.7	14.7
40°-50°	69.8	2.5
50°-60°	67.9	2.4
60°-70°	58.0	2.0
70°-80°	38.8	1.4
80°-90°	11.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2173.5	76.7
0°-40°	2589.1	91.3
0°-60°	2726.8	96.2
0°-90°	2835.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2835.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3367	
5°	3437	328
15°	3213	889
25°	2150	956
35°	659	416
45°	90	70
55°	76	68
65°	59	58
75°	37	39
85°	10	12
90°	0	



TEST NUMBER: P746476

CATALOG NUMBER: LD4D30D010-EU4DR6020359035-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	3367.3
2.5°	3461.9
5°	3437.0
7.5°	3444.9
10°	3438.7
12.5°	3367.7
15°	3213.1
17.5°	3005.3
20°	2756.0
22.5°	2489.1
25°	2149.9
27.5°	1719.6
30°	1389.6
32.5°	1071.0
35°	658.7
37.5°	281.8
40°	99.9
42.5°	92.0
45°	90.3
47.5°	87.2
50°	83.7
52.5°	79.8
55°	75.8
57.5°	71.8
60°	68.0
62.5°	63.5
65°	58.7
67.5°	53.9
70°	48.6
72.5°	43.0
75°	37.2
77.5°	30.7
80°	24.1
82.5°	17.1
85°	10.1
87.5°	3.5
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)