

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P746553

Luminaire Tested: LD4D30D010-EU4DR6520359035-4LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P746553
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D30D010-EU4DR6520359035-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1845.4 lumens
Efficiency: N/A
Efficacy: 63.6 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 29
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P746553
CATALOG NUMBER: LD4D30D010-EU4DR6520359035-4LBDP1B

Luminous Intensity Polar Plot

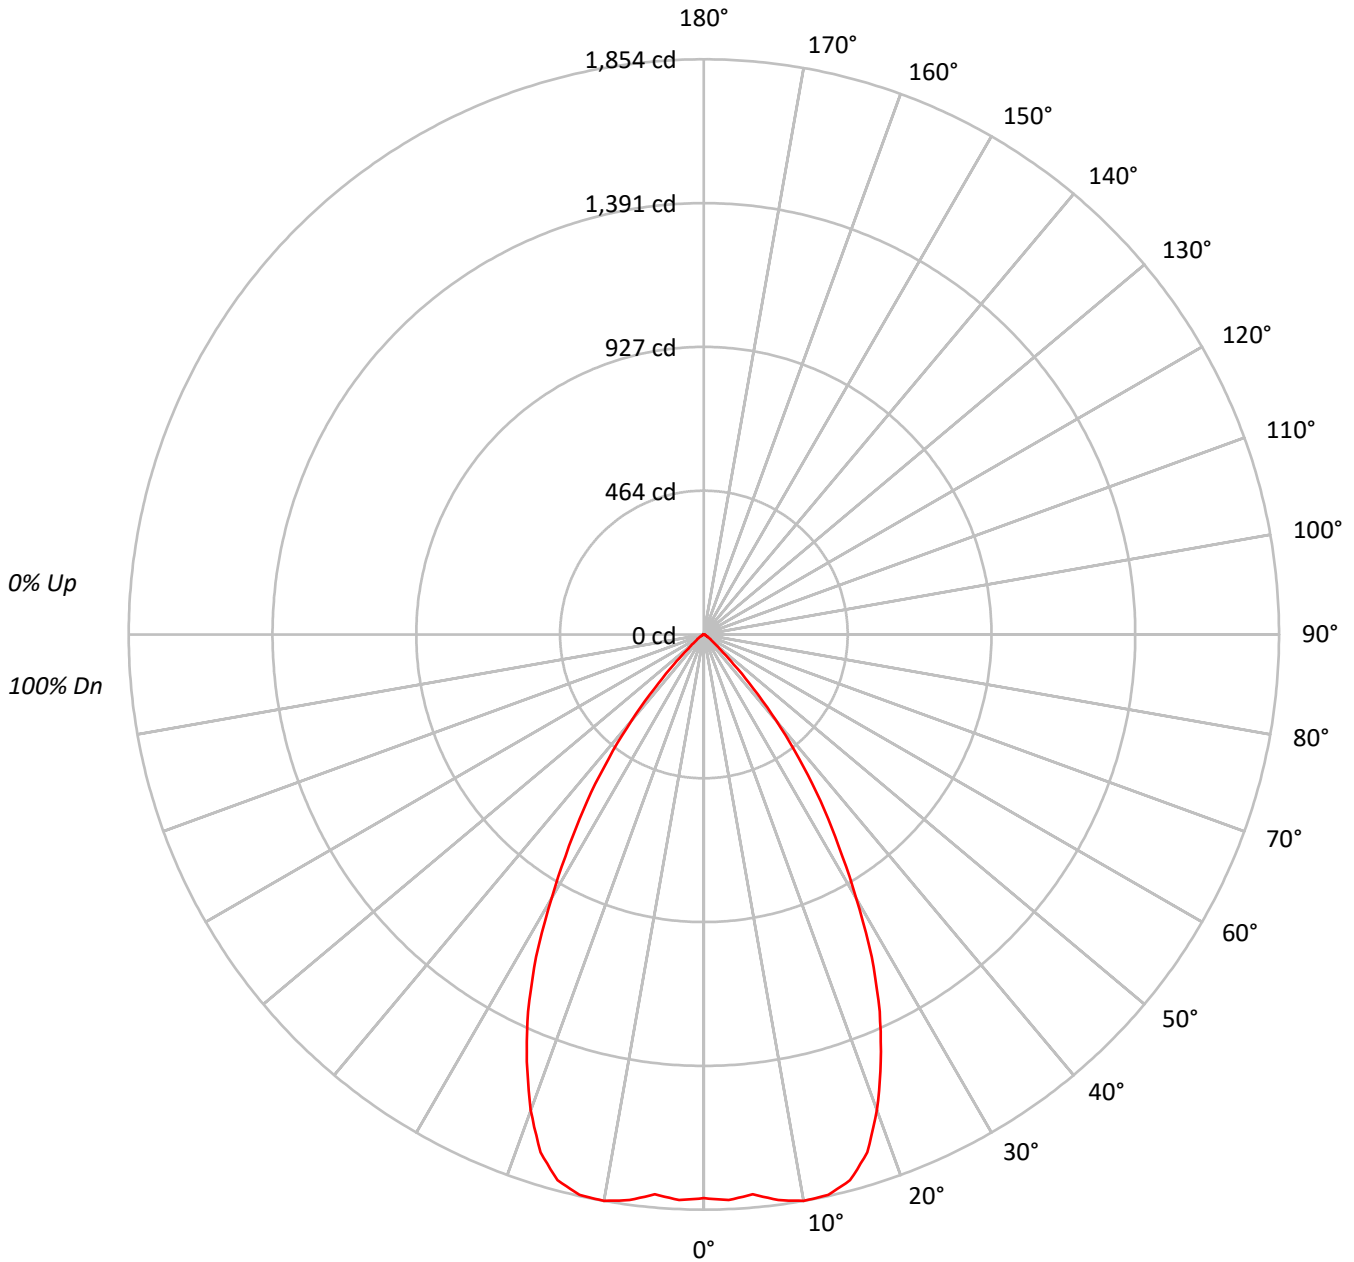



TEST NUMBER: P746553

CATALOG NUMBER: LD4D30D010-EU4DR6520359035-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93		
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87		
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80		
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75		
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69		
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65		
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60		
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57		
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53		
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	198516
5°	198682
10°	205672
15°	206016
20°	189676
25°	161605
30°	123716
35°	87406
40°	51589
45°	20953
50°	7598
55°	4229
60°	2426
65°	1344
70°	1406
75°	1098
80°	1133
85°	1003

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 20953 cd/sqm



TEST NUMBER: P746553

CATALOG NUMBER: LD4D30D010-EU4DR6520359035-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	175.0	9.5
10°-20°	504.7	27.3
20°-30°	605.5	32.8
30°-40°	406.9	22.1
40°-50°	121.8	6.6
50°-60°	21.5	1.2
60°-70°	6.1	0.3
70°-80°	3.0	0.2
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1285.1	69.6
0°-40°	1692.0	91.7
0°-60°	1835.3	99.5
0°-90°	1845.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1845.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1817	
5°	1812	175
15°	1821	505
25°	1340	605
35°	655	407
45°	136	122
55°	22	22
65°	5	6
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P746553

CATALOG NUMBER: LD4D30D010-EU4DR6520359035-4LBDP1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	1816.9
2.5°	1824.7
5°	1811.5
7.5°	1838.9
10°	1853.8
12.5°	1850.2
15°	1821.3
17.5°	1750.5
20°	1631.3
22.5°	1490.8
25°	1340.5
27.5°	1170.9
30°	980.6
32.5°	808.1
35°	655.3
37.5°	504.3
40°	361.7
42.5°	236.2
45°	135.6
47.5°	71.8
50°	44.7
52.5°	31.0
55°	22.2
57.5°	16.0
60°	11.1
62.5°	7.2
65°	5.2
67.5°	4.6
70°	4.4
72.5°	3.4
75°	2.6
77.5°	2.3
80°	1.8
82.5°	1.3
85°	0.8
87.5°	0.5
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)