

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P746554

Luminaire Tested: LD4D30D010-EU4DR6520359035-4LBDP1H

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P746554  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D30D010-EU4DR6520359035-4LBDP1H  
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2477.3 lumens  
Efficiency: N/A  
Efficacy: 85.4 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 29  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P746554  
CATALOG NUMBER: LD4D30D010-EU4DR6520359035-4LBDP1H

### Luminous Intensity Polar Plot

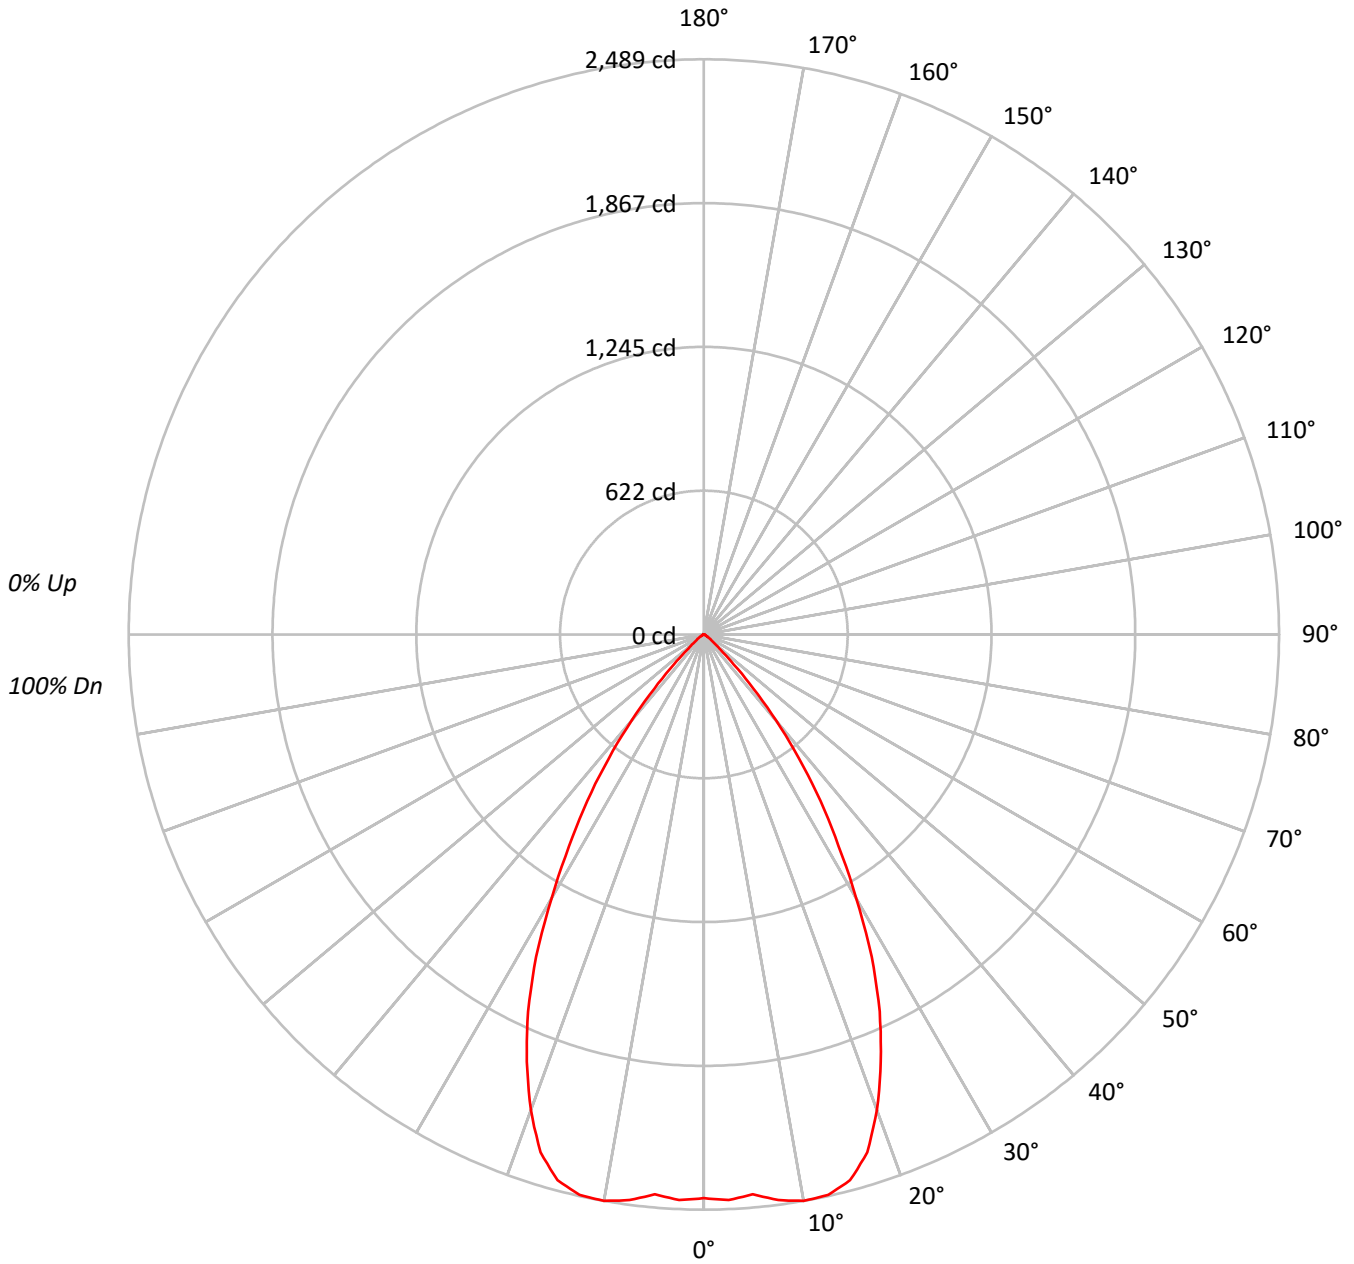



TEST NUMBER: P746554

CATALOG NUMBER: LD4D30D010-EU4DR6520359035-4LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	266509
5°	266726
10°	276112
15°	276578
20°	254626
25°	216952
30°	166094
35°	117337
40°	69261
45°	28122
50°	10199
55°	5677
60°	3256
65°	1784
70°	1885
75°	1435
80°	1510
85°	1254

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 28122 cd/sqm



TEST NUMBER: P746554

CATALOG NUMBER: LD4D30D010-EU4DR6520359035-4LBDP1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	234.9	9.5
10°-20°	677.5	27.3
20°-30°	812.9	32.8
30°-40°	546.3	22.1
40°-50°	163.6	6.6
50°-60°	28.9	1.2
60°-70°	8.2	0.3
70°-80°	4.0	0.2
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1725.2	69.6
0°-40°	2271.5	91.7
0°-60°	2463.9	99.5
0°-90°	2477.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2477.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2439	
5°	2432	235
15°	2445	677
25°	1800	813
35°	880	546
45°	182	164
55°	30	29
65°	7	8
75°	3	4
85°	1	1
90°	0	



TEST NUMBER: P746554

CATALOG NUMBER: LD4D30D010-EU4DR6520359035-4LBDP1H

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2439.2
2.5°	2449.6
5°	2431.9
7.5°	2468.6
10°	2488.7
12.5°	2483.9
15°	2445.1
17.5°	2350.1
20°	2189.9
22.5°	2001.4
25°	1799.6
27.5°	1571.9
30°	1316.5
32.5°	1084.9
35°	879.7
37.5°	676.9
40°	485.6
42.5°	317.2
45°	182.0
47.5°	96.4
50°	60.0
52.5°	41.6
55°	29.8
57.5°	21.5
60°	14.9
62.5°	9.7
65°	6.9
67.5°	6.2
70°	5.9
72.5°	4.5
75°	3.4
77.5°	3.1
80°	2.4
82.5°	1.7
85°	1.0
87.5°	0.7
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)