

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P746570

Luminaire Tested: LD4D30D010-EU4DR6520359040-4LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P746570
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D30D010-EU4DR6520359040-4LBS1B
Description: 4 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2488.2 lumens
Efficiency: N/A
Efficacy: 85.8 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 29
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P746570
CATALOG NUMBER: LD4D30D010-EU4DR6520359040-4LBS1B

Luminous Intensity Polar Plot

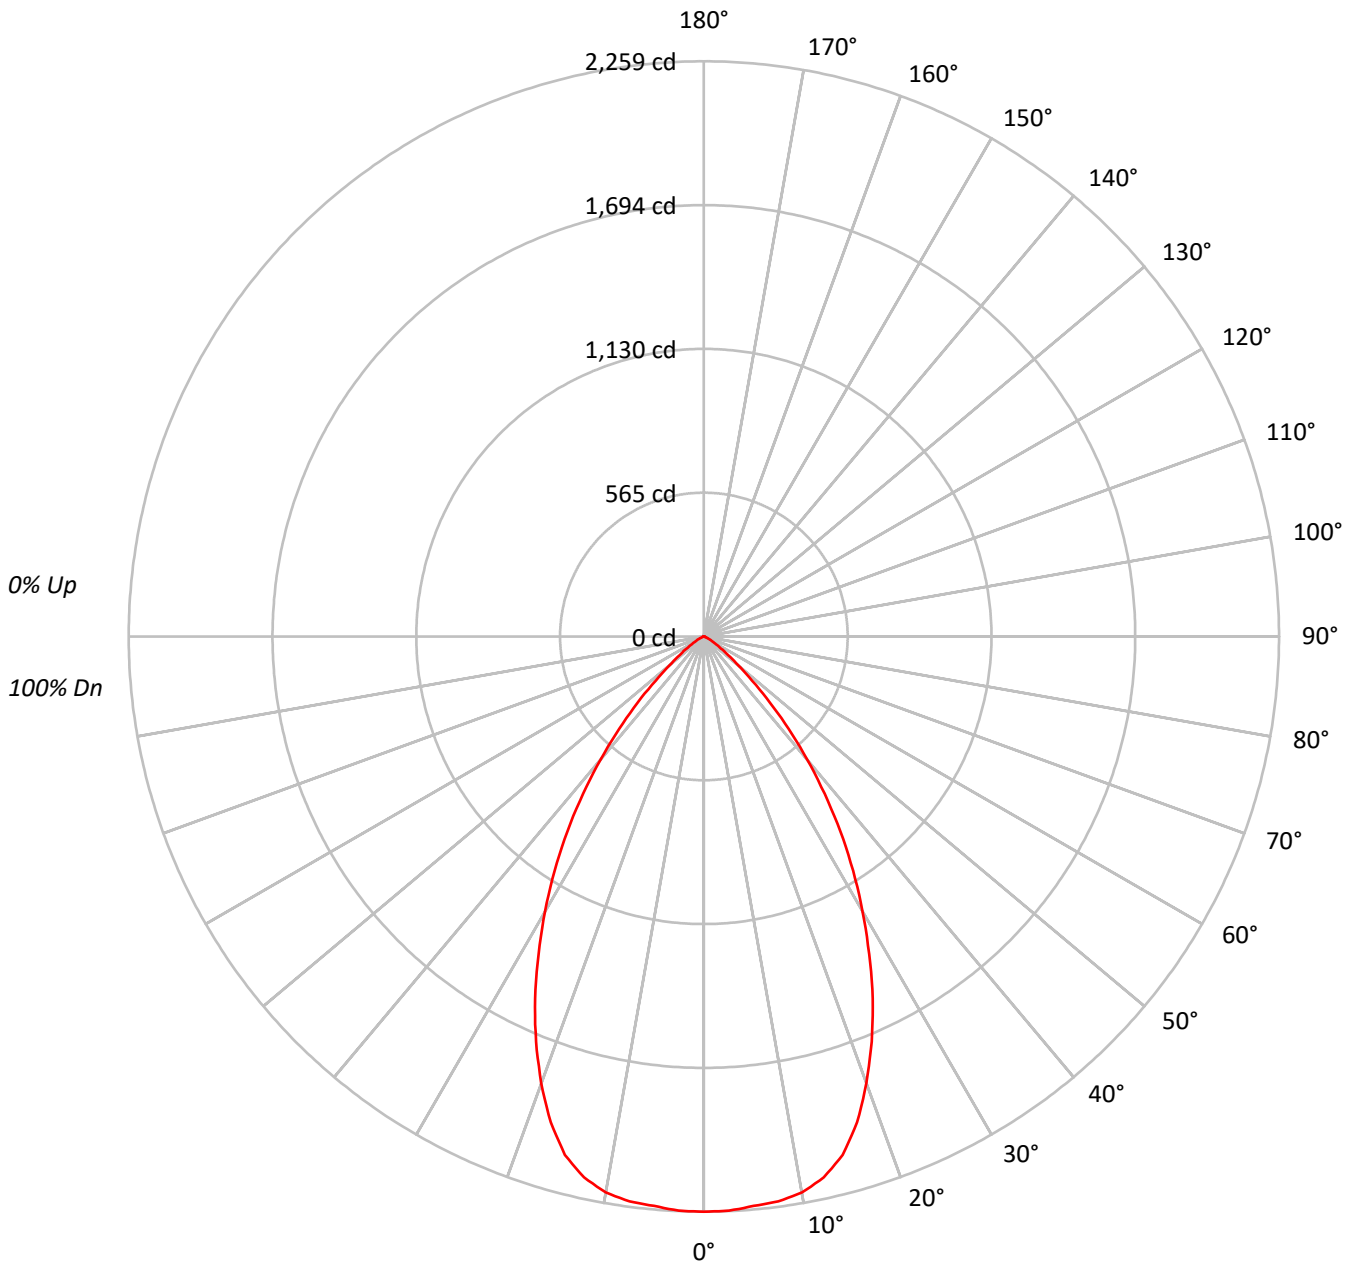



TEST NUMBER: P746570

CATALOG NUMBER: LD4D30D010-EU4DR6520359040-4LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	131946
5°	131612
10°	131503
15°	127446
20°	116026
25°	101109
30°	84096
35°	66628
40°	48093
45°	30379
50°	15837
55°	8421
60°	4427
65°	2432
70°	1025
75°	1128
80°	774
85°	670

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 30379 cd/sqm



TEST NUMBER: P746570

CATALOG NUMBER: LD4D30D010-EU4DR6520359040-4LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	213.6	8.6
10°-20°	585.1	23.5
20°-30°	715.1	28.7
30°-40°	580.2	23.3
40°-50°	289.1	11.6
50°-60°	80.7	3.2
60°-70°	18.3	0.7
70°-80°	4.8	0.2
80°-90°	1.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1513.8	60.8
0°-40°	2094.1	84.2
0°-60°	2463.9	99.0
0°-90°	2488.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2488.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2259	
5°	2245	214
15°	2108	585
25°	1569	715
35°	934	580
45°	368	289
55°	83	81
65°	18	18
75°	5	5
85°	1	1
90°	0	



TEST NUMBER: P746570

CATALOG NUMBER: LD4D30D010-EU4DR6520359040-4LBS1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	2259.2
2.5°	2257.5
5°	2244.9
7.5°	2237.6
10°	2217.4
12.5°	2176.2
15°	2107.8
17.5°	2000.9
20°	1866.8
22.5°	1722.1
25°	1569.0
27.5°	1405.3
30°	1247.0
32.5°	1090.6
35°	934.5
37.5°	778.9
40°	630.8
42.5°	492.0
45°	367.8
47.5°	256.3
50°	174.3
52.5°	120.2
55°	82.7
57.5°	55.7
60°	37.9
62.5°	26.2
65°	17.6
67.5°	8.9
70°	6.0
72.5°	5.7
75°	5.0
77.5°	3.3
80°	2.3
82.5°	1.7
85°	1.0
87.5°	0.7
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)