

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P747300

Luminaire Tested: LD4D35BD010-EU4DR6520359024-4LBS1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P747300  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D35BD010-EU4DR6520359024-4LBS1LI  
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2652.1 lumens  
Efficiency: N/A  
Efficacy: 86.1 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 30.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P747300

CATALOG NUMBER: LD4D35BD010-EU4DR6520359024-4LBS1LI

### Luminous Intensity Polar Plot

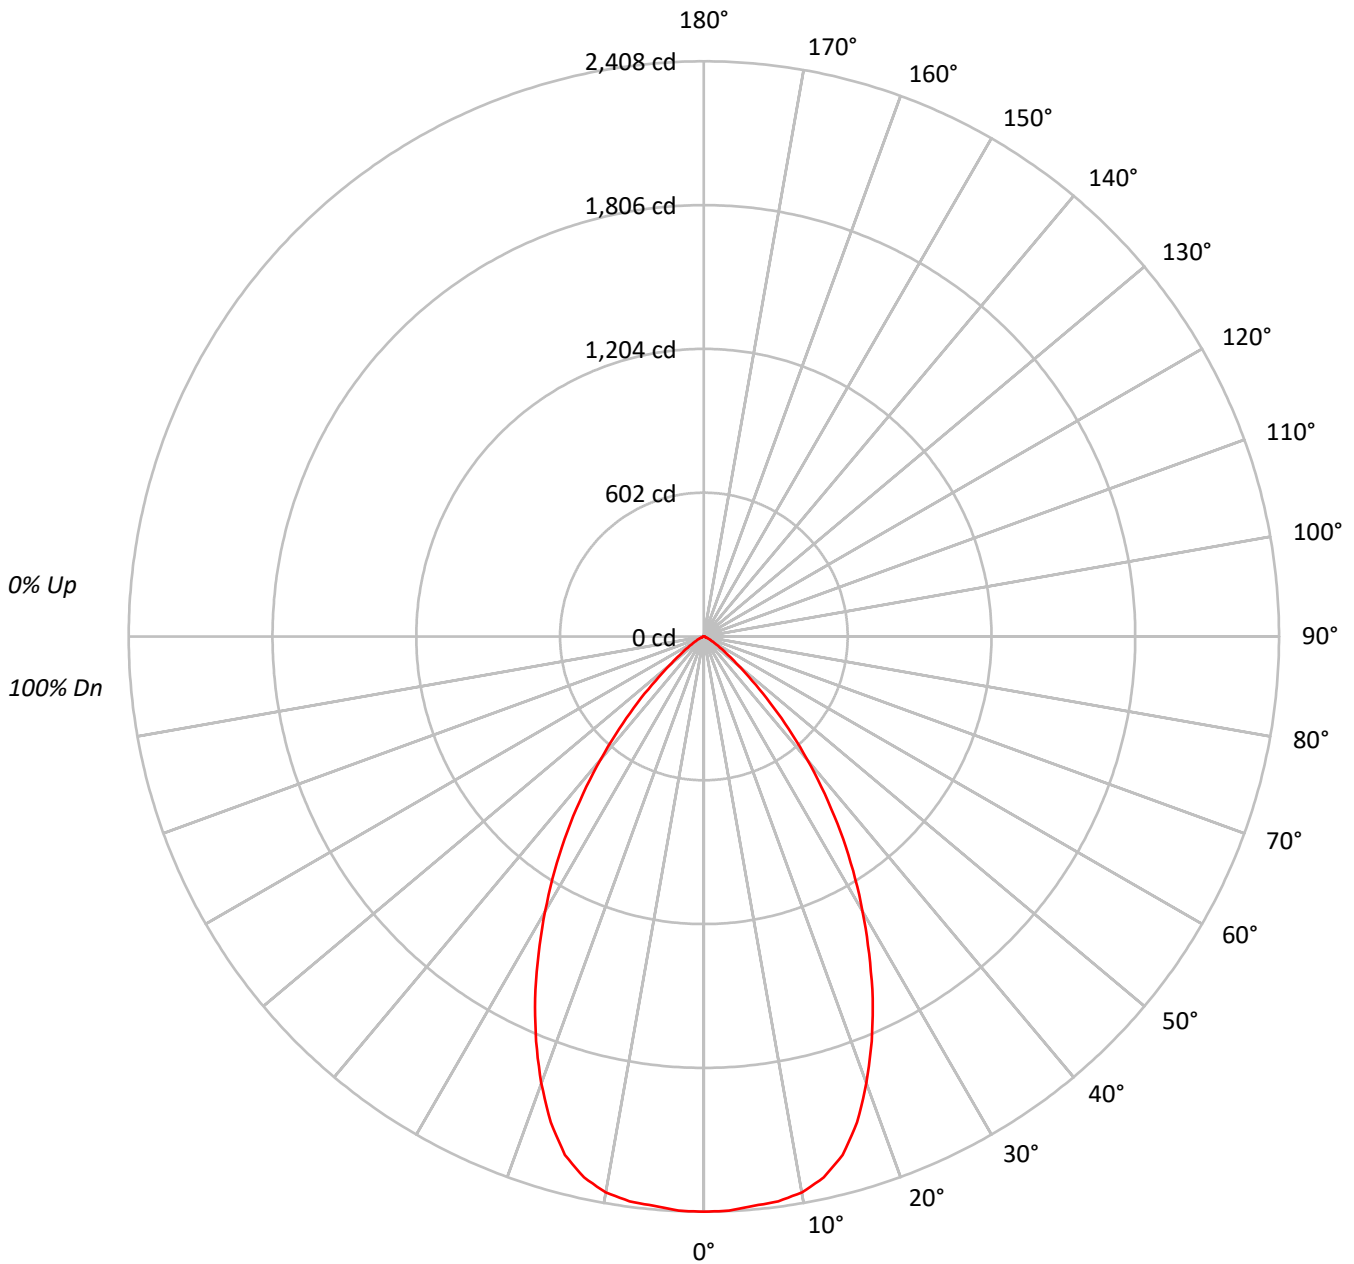



TEST NUMBER: P747300

CATALOG NUMBER: LD4D35BD010-EU4DR6520359024-4LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93	93	93	93
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85	85	85	85
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78	78	78	78
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72	72	72	72
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66	66	66	66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61	61	61	61
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56	56	56	56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52	52	52	52
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49	49	49	49
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46	46	46	46

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	140637
5°	140277
10°	140161
15°	135839
20°	123664
25°	107766
30°	89633
35°	71020
40°	51257
45°	32386
50°	16882
55°	8971
60°	4707
65°	2598
70°	1093
75°	1196
80°	841
85°	737

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 32386 cd/sqm



TEST NUMBER: P747300

CATALOG NUMBER: LD4D35BD010-EU4DR6520359024-4LBS1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	227.7	8.6
10°-20°	623.6	23.5
20°-30°	762.2	28.7
30°-40°	618.4	23.3
40°-50°	308.2	11.6
50°-60°	85.9	3.2
60°-70°	19.6	0.7
70°-80°	5.1	0.2
80°-90°	1.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1613.5	60.8
0°-40°	2232.0	84.2
0°-60°	2626.1	99.0
0°-90°	2652.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2652.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2408	
5°	2393	228
15°	2247	624
25°	1672	762
35°	996	618
45°	392	308
55°	88	86
65°	19	20
75°	5	5
85°	1	1
90°	0	



TEST NUMBER: P747300

CATALOG NUMBER: LD4D35BD010-EU4DR6520359024-4LBS1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2408.0
2.5°	2406.2
5°	2392.7
7.5°	2385.0
10°	2363.4
12.5°	2319.5
15°	2246.6
17.5°	2132.7
20°	1989.7
22.5°	1835.4
25°	1672.3
27.5°	1497.9
30°	1329.1
32.5°	1162.4
35°	996.1
37.5°	830.1
40°	672.3
42.5°	524.4
45°	392.1
47.5°	273.2
50°	185.8
52.5°	128.1
55°	88.1
57.5°	59.4
60°	40.3
62.5°	28.0
65°	18.8
67.5°	9.6
70°	6.4
72.5°	6.0
75°	5.3
77.5°	3.5
80°	2.5
82.5°	1.8
85°	1.1
87.5°	0.7
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)