

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P747377

Luminaire Tested: LD4D35BD010-EU4DR7020359024-4LBS1H

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P747377  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D35BD010-EU4DR7020359024-4LBS1H  
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2909.5 lumens  
Efficiency: N/A  
Efficacy: 94.5 lumens/watt  
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 30.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P747377  
CATALOG NUMBER: LD4D35BD010-EU4DR7020359024-4LBS1H

### Luminous Intensity Polar Plot

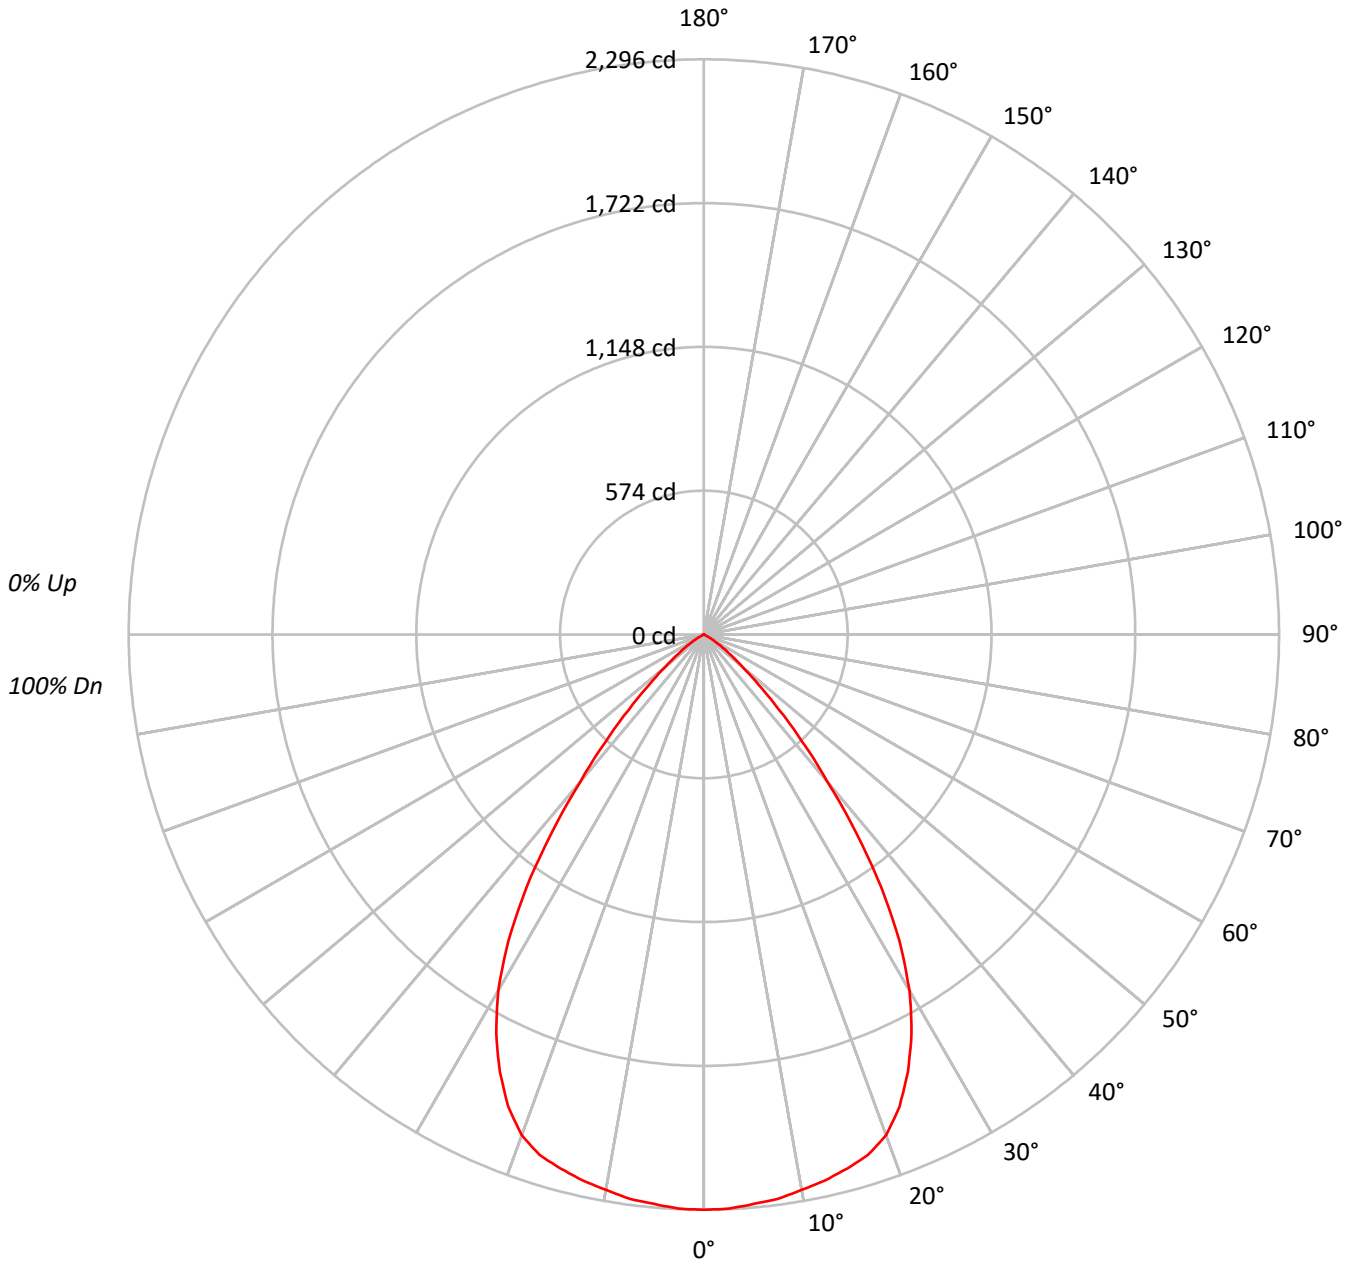



TEST NUMBER: P747377

CATALOG NUMBER: LD4D35BD010-EU4DR7020359024-4LBS1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93						93													
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85						85													
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78						78													
4	95	87	81	76	93	86	80	76	83	78	75	81	77	74	79	76	73	71						71													
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65						65													
6	84	75	68	63	83	74	68	63	72	67	63	71	66	62	69	65	62	60						60													
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	61	57	56						56													
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51						51													
9	71	61	54	50	70	60	54	50	59	53	50	58	53	49	57	53	49	48						48													
10	67	57	50	46	66	56	50	46	55	50	46	55	50	46	54	49	46	44						44													

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	250917
5°	250285
10°	249751
15°	249679
20°	247231
25°	232251
30°	207047
35°	165074
40°	109611
45°	65531
50°	33979
55°	17849
60°	6315
65°	103
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 65531 cd/sqm



TEST NUMBER: P747377

CATALOG NUMBER: LD4D35BD010-EU4DR7020359024-4LBS1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	217.0	7.5
10°-20°	622.4	21.4
20°-30°	878.0	30.2
30°-40°	758.0	26.1
40°-50°	339.4	11.7
50°-60°	88.9	3.1
60°-70°	5.8	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1717.5	59.0
0°-40°	2475.5	85.1
0°-60°	2903.8	99.8
0°-90°	2909.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2909.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2296	
5°	2282	217
15°	2207	622
25°	1926	878
35°	1238	758
45°	424	339
55°	94	89
65°	0	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P747377

CATALOG NUMBER: LD4D35BD010-EU4DR7020359024-4LBS1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2296.5
2.5°	2294.0
5°	2282.0
7.5°	2272.1
10°	2251.1
12.5°	2232.1
15°	2207.3
17.5°	2178.8
20°	2126.3
22.5°	2040.0
25°	1926.5
27.5°	1794.7
30°	1641.1
32.5°	1453.2
35°	1237.6
37.5°	999.8
40°	768.5
42.5°	583.9
45°	424.1
47.5°	292.4
50°	199.9
52.5°	137.9
55°	93.7
57.5°	56.6
60°	28.9
62.5°	9.1
65°	0.4
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)