

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P746999

Luminaire Tested: LD4D35BD010-EU4DR4520359027-4LBS1B

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P746999  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D35BD010-EU4DR4520359027-4LBS1B  
Description: 4 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 45° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3131.9 lumens  
Efficiency: N/A  
Efficacy: 101.7 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 30.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P746999  
CATALOG NUMBER: LD4D35BD010-EU4DR4520359027-4LBS1B

### Luminous Intensity Polar Plot

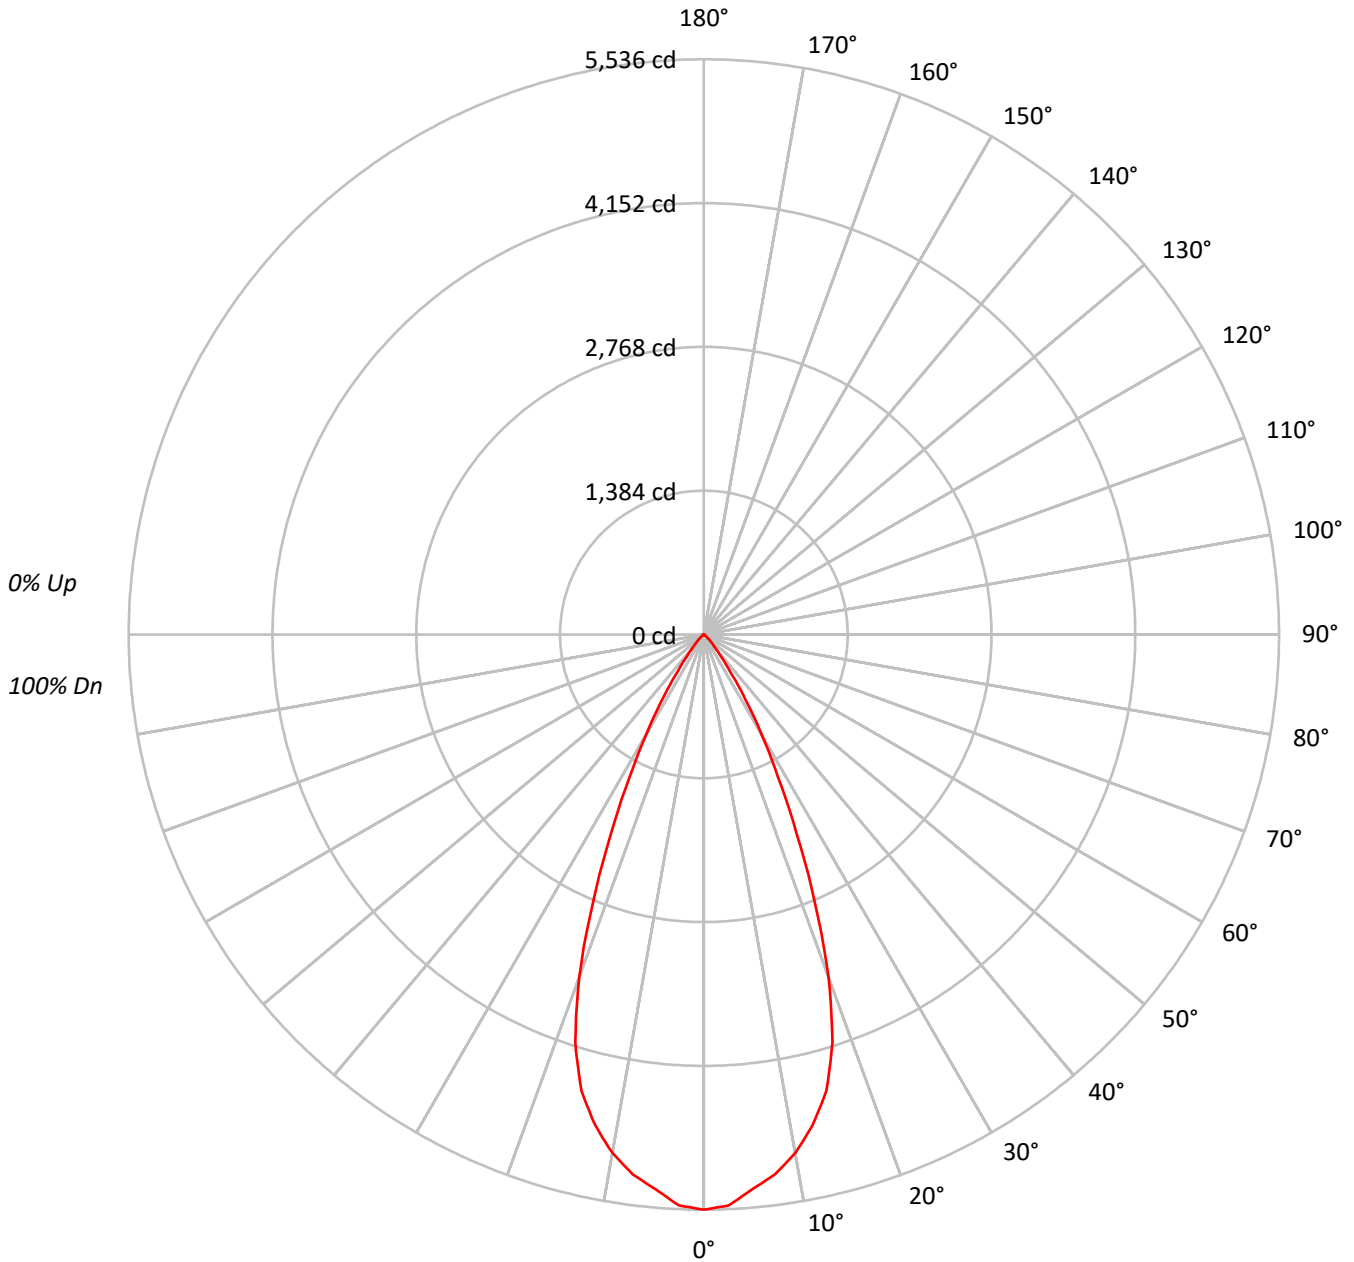



TEST NUMBER: P746999

CATALOG NUMBER: LD4D35BD010-EU4DR4520359027-4LBS1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95	95	95	95
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90	90	90	90
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85	85	85	85
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81	81	81	81
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77	77	77	77
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73	73	73	73
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69	69	69	69
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66	66	66	66
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63	63	63	63
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60	60	60	60

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	604835
5°	587611
10°	562187
15°	514515
20°	408188
25°	254843
30°	140458
35°	63063
40°	24846
45°	11712
50°	5558
55°	2895
60°	1420
65°	336
70°	128
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 11712 cd/sqm



TEST NUMBER: P746999

CATALOG NUMBER: LD4D35BD010-EU4DR4520359027-4LBS1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	503.4	16.1
10°-20°	1238.9	39.6
20°-30°	981.1	31.3
30°-40°	326.7	10.4
40°-50°	64.9	2.1
50°-60°	14.7	0.5
60°-70°	2.1	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2723.4	87.0
0°-40°	3050.1	97.4
0°-60°	3129.7	99.9
0°-90°	3131.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3131.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5536	
5°	5358	503
15°	4549	1239
25°	2114	981
35°	473	327
45°	76	65
55°	15	15
65°	1	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P746999

CATALOG NUMBER: LD4D35BD010-EU4DR4520359027-4LBS1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	5535.7
2.5°	5499.5
5°	5357.6
7.5°	5240.5
10°	5067.2
12.5°	4836.4
15°	4548.6
17.5°	4115.8
20°	3510.6
22.5°	2789.6
25°	2113.9
27.5°	1547.8
30°	1113.3
32.5°	757.2
35°	472.8
37.5°	280.4
40°	174.2
42.5°	114.5
45°	75.8
47.5°	48.8
50°	32.7
52.5°	21.8
55°	15.2
57.5°	10.0
60°	6.5
62.5°	3.5
65°	1.3
67.5°	0.4
70°	0.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)