

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P747339

Luminaire Tested: LD4D35BD010-EU4DR6520359035-4LBS1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P747339  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D35BD010-EU4DR6520359035-4LBS1LI  
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3127.6 lumens  
Efficiency: N/A  
Efficacy: 101.5 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct


Input Watts (W): 30.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P747339  
CATALOG NUMBER: LD4D35BD010-EU4DR6520359035-4LBS1LI

### Luminous Intensity Polar Plot

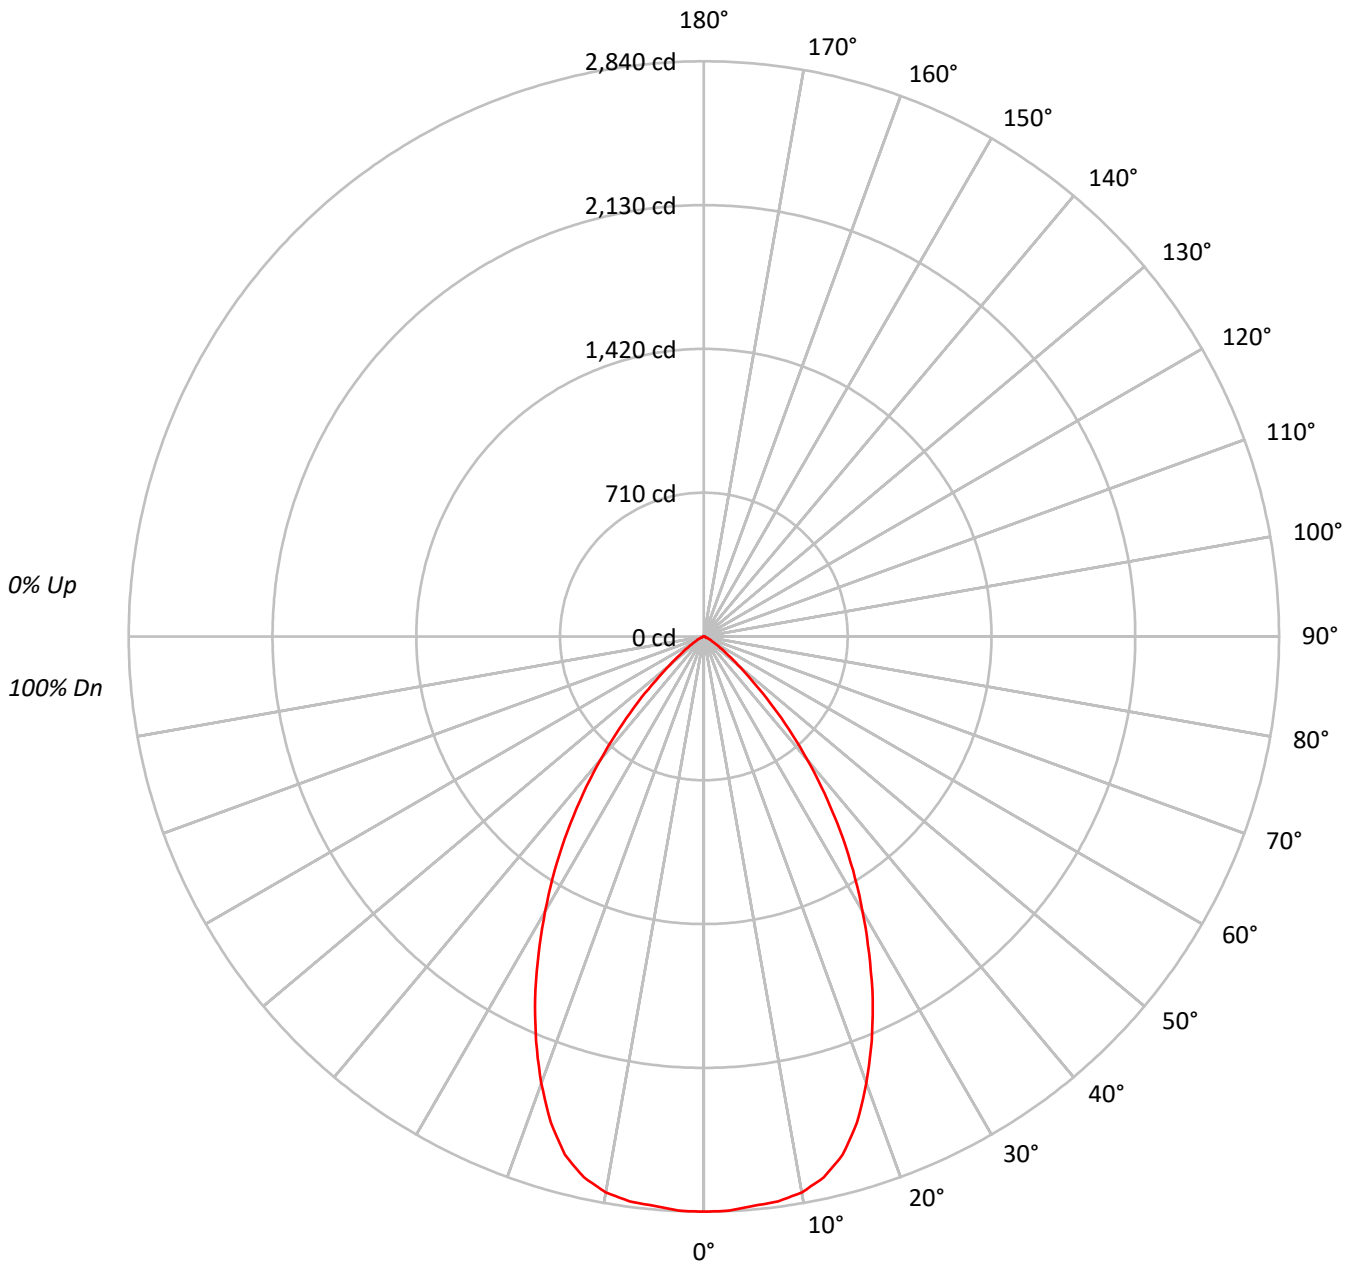



TEST NUMBER: P747339

CATALOG NUMBER: LD4D35BD010-EU4DR6520359035-4LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	165849
5°	165434
10°	165289
15°	160194
20°	145840
25°	127092
30°	105704
35°	83754
40°	60451
45°	38192
50°	19907
55°	10580
60°	5560
65°	3054
70°	1281
75°	1422
80°	975
85°	871

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 38192 cd/sqm



TEST NUMBER: P747339

CATALOG NUMBER: LD4D35BD010-EU4DR6520359035-4LBS1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	268.5	8.6
10°-20°	735.4	23.5
20°-30°	898.9	28.7
30°-40°	729.3	23.3
40°-50°	363.5	11.6
50°-60°	101.4	3.2
60°-70°	23.1	0.7
70°-80°	6.0	0.2
80°-90°	1.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1902.8	60.8
0°-40°	2632.2	84.2
0°-60°	3097.0	99.0
0°-90°	3127.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3127.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2840	
5°	2822	269
15°	2649	735
25°	1972	899
35°	1175	729
45°	462	363
55°	104	101
65°	22	23
75°	6	6
85°	1	2
90°	0	



TEST NUMBER: P747339

CATALOG NUMBER: LD4D35BD010-EU4DR6520359035-4LBS1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2839.7
2.5°	2837.6
5°	2821.8
7.5°	2812.6
10°	2787.1
12.5°	2735.4
15°	2649.4
17.5°	2515.1
20°	2346.5
22.5°	2164.5
25°	1972.2
27.5°	1766.4
30°	1567.4
32.5°	1370.8
35°	1174.7
37.5°	979.0
40°	792.9
42.5°	618.4
45°	462.4
47.5°	322.2
50°	219.1
52.5°	151.1
55°	103.9
57.5°	70.1
60°	47.6
62.5°	33.0
65°	22.1
67.5°	11.3
70°	7.5
72.5°	7.1
75°	6.3
77.5°	4.2
80°	2.9
82.5°	2.1
85°	1.3
87.5°	0.8
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)