

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P746896

Luminaire Tested: LD4D35BD010-EU4DR3520359050-4LBS1H

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P746896  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D35BD010-EU4DR3520359050-4LBS1H  
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3422.9 lumens  
Efficiency: N/A  
Efficacy: 111.1 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 30.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P746896  
CATALOG NUMBER: LD4D35BD010-EU4DR3520359050-4LBS1H

### Luminous Intensity Polar Plot

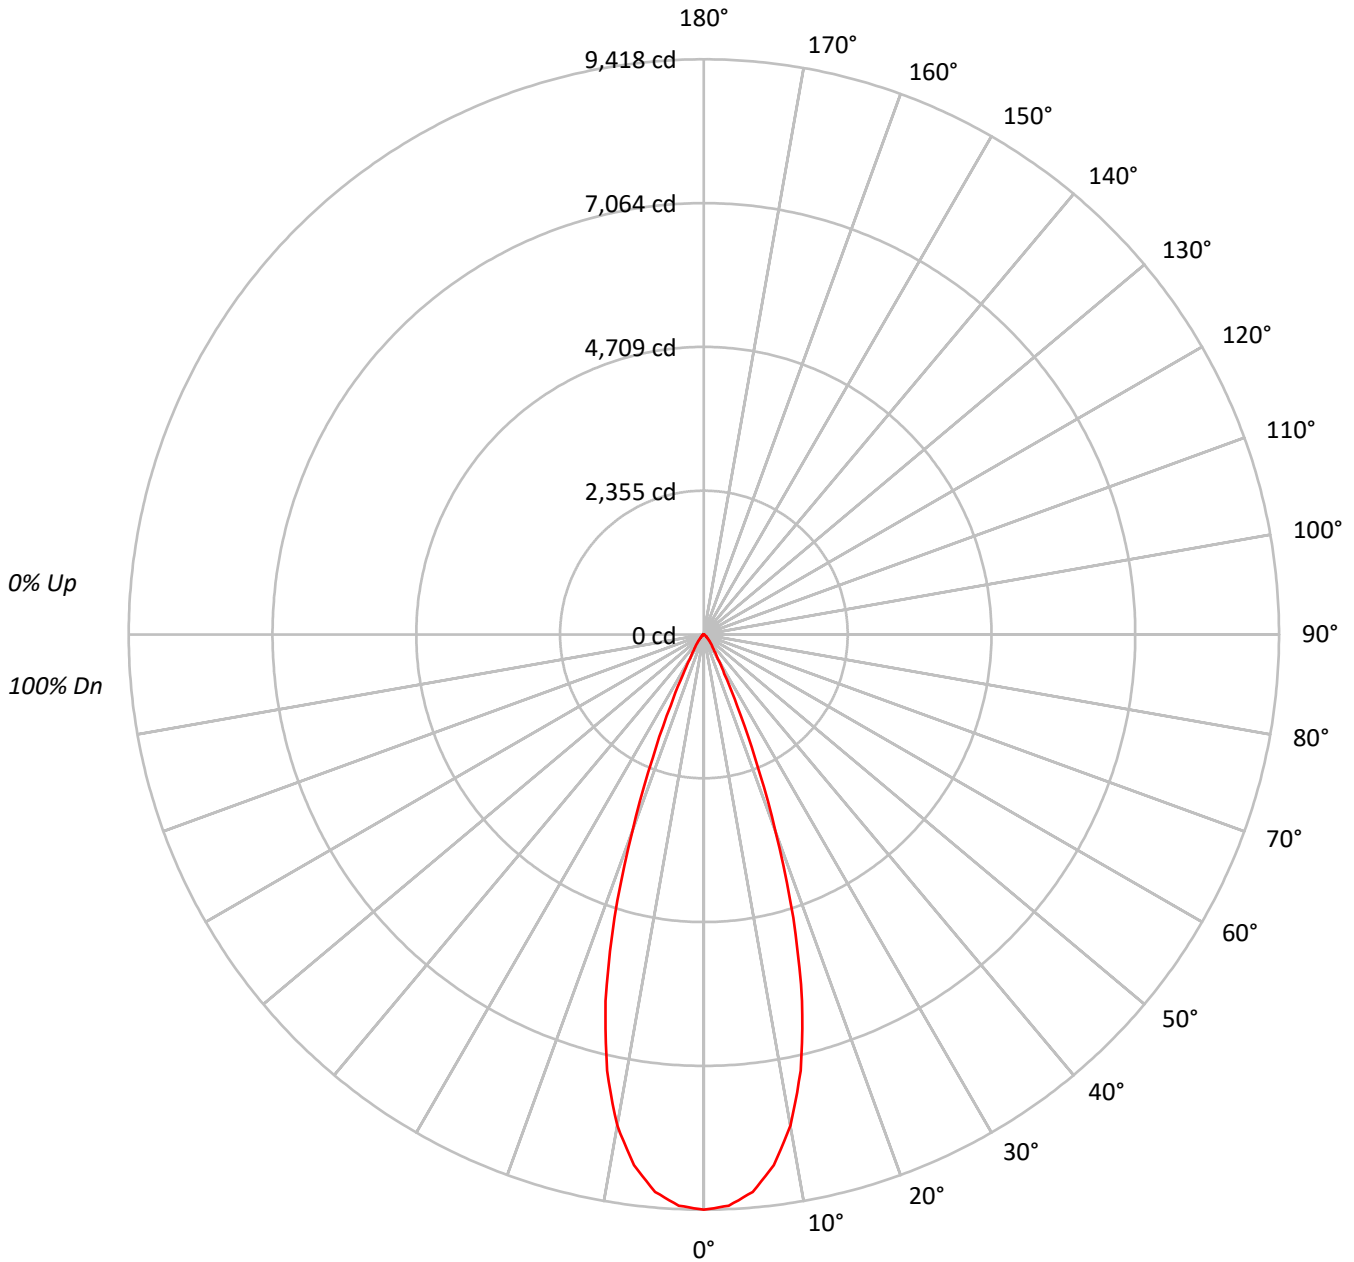



TEST NUMBER: P746896

CATALOG NUMBER: LD4D35BD010-EU4DR3520359050-4LBS1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96			
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92			
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88			
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84			
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81			
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78			
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75			
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72			
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70			
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1029029
5°	1004849
10°	905632
15°	702920
20°	398688
25°	155107
30°	57871
35°	31718
40°	20738
45°	12624
50°	8040
55°	5677
60°	4152
65°	2249
70°	160
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 12624 cd/sqm



TEST NUMBER: P746896

CATALOG NUMBER: LD4D35BD010-EU4DR3520359050-4LBS1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	842.6	24.6
10°-20°	1645.1	48.1
20°-30°	671.0	19.6
30°-40°	160.6	4.7
40°-50°	66.9	2.0
50°-60°	27.7	0.8
60°-70°	8.7	0.3
70°-80°	0.2	0.0
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3158.7	92.3
0°-40°	3319.3	97.0
0°-60°	3413.9	99.7
0°-90°	3422.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3422.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9418	
5°	9162	843
15°	6214	1645
25°	1287	671
35°	238	161
45°	82	67
55°	30	28
65°	9	9
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P746896

CATALOG NUMBER: LD4D35BD010-EU4DR3520359050-4LBS1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	9418.1
2.5°	9361.6
5°	9161.8
7.5°	8763.3
10°	8162.8
12.5°	7317.4
15°	6214.2
17.5°	4864.9
20°	3428.9
22.5°	2186.4
25°	1286.6
27.5°	727.3
30°	458.7
32.5°	322.0
35°	237.8
37.5°	183.9
40°	145.4
42.5°	112.0
45°	81.7
47.5°	61.1
50°	47.3
52.5°	37.5
55°	29.8
57.5°	24.1
60°	19.0
62.5°	13.9
65°	8.7
67.5°	3.1
70°	0.5
72.5°	0.5
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.5
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)