

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P747364

Luminaire Tested: LD4D35BD010-EU4DR6520359050-4LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P747364
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D35BD010-EU4DR6520359050-4LBS1H
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3140.1 lumens
Efficiency: N/A
Efficacy: 102.0 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 30.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P747364

CATALOG NUMBER: LD4D35BD010-EU4DR6520359050-4LBS1H

Luminous Intensity Polar Plot

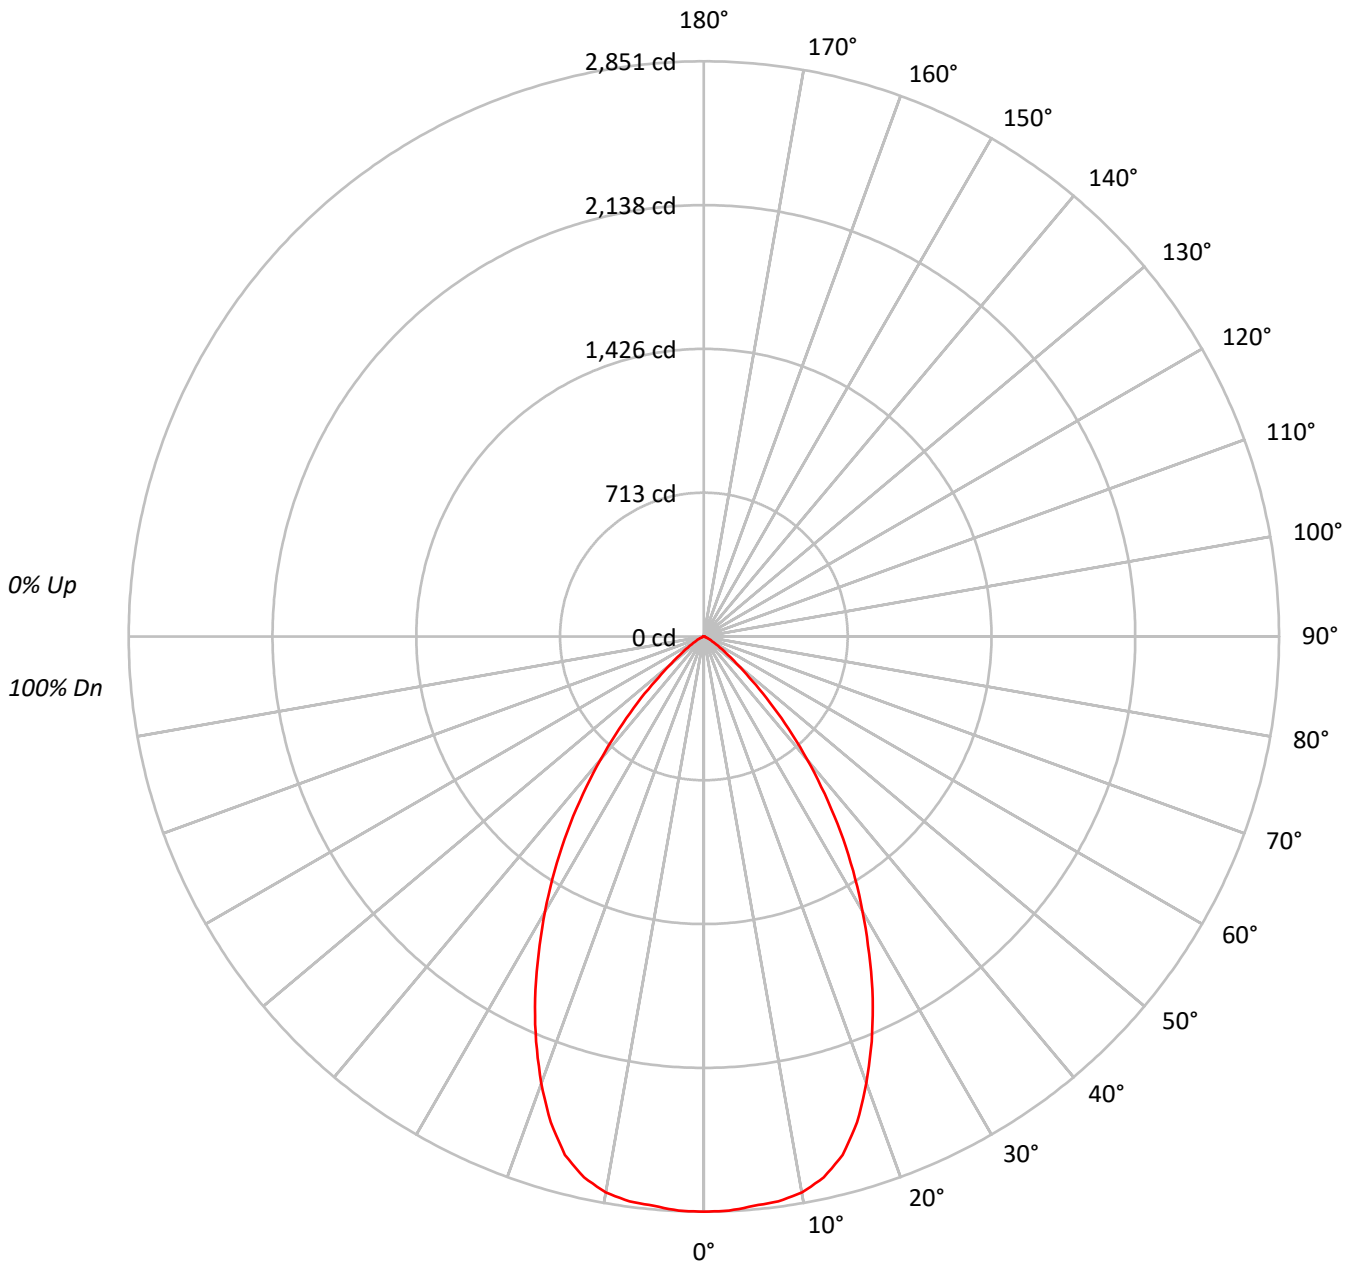



TEST NUMBER: P747364

CATALOG NUMBER: LD4D35BD010-EU4DR6520359050-4LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93	93	93	93
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85	85	85	85
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78	78	78	78
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72	72	72	72
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66	66	66	66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61	61	61	61
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56	56	56	56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52	52	52	52
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49	49	49	49
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46	46	46	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	166515
5°	166096
10°	165959
15°	160841
20°	146424
25°	127601
30°	106129
35°	84089
40°	60695
45°	38341
50°	19989
55°	10620
60°	5583
65°	3068
70°	1281
75°	1422
80°	975
85°	871

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 38341 cd/sqm



TEST NUMBER: P747364

CATALOG NUMBER: LD4D35BD010-EU4DR6520359050-4LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	269.6	8.6
10°-20°	738.3	23.5
20°-30°	902.5	28.7
30°-40°	732.3	23.3
40°-50°	364.9	11.6
50°-60°	101.8	3.2
60°-70°	23.1	0.7
70°-80°	6.0	0.2
80°-90°	1.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1910.5	60.8
0°-40°	2642.7	84.2
0°-60°	3109.4	99.0
0°-90°	3140.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3140.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2851	
5°	2833	270
15°	2660	738
25°	1980	903
35°	1179	732
45°	464	365
55°	104	102
65°	22	23
75°	6	6
85°	1	2
90°	0	



TEST NUMBER: P747364

CATALOG NUMBER: LD4D35BD010-EU4DR6520359050-4LBS1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	2851.1
2.5°	2849.1
5°	2833.1
7.5°	2823.9
10°	2798.4
12.5°	2746.4
15°	2660.1
17.5°	2525.2
20°	2355.9
22.5°	2173.2
25°	1980.1
27.5°	1773.5
30°	1573.7
32.5°	1376.3
35°	1179.4
37.5°	982.9
40°	796.1
42.5°	620.9
45°	464.2
47.5°	323.5
50°	220.0
52.5°	151.7
55°	104.3
57.5°	70.4
60°	47.8
62.5°	33.1
65°	22.2
67.5°	11.3
70°	7.5
72.5°	7.1
75°	6.3
77.5°	4.2
80°	2.9
82.5°	2.1
85°	1.3
87.5°	0.8
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)