

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P747555

Luminaire Tested: LD4D40BD010-EU4DR3040509030-4LBDP1H

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P747555
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D40BD010-EU4DR3040509030-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3673.7 lumens
Efficiency: N/A
Efficacy: 104.4 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct


Input Watts (W): 35.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P747555
CATALOG NUMBER: LD4D40BD010-EU4DR3040509030-4LBDP1H

Luminous Intensity Polar Plot

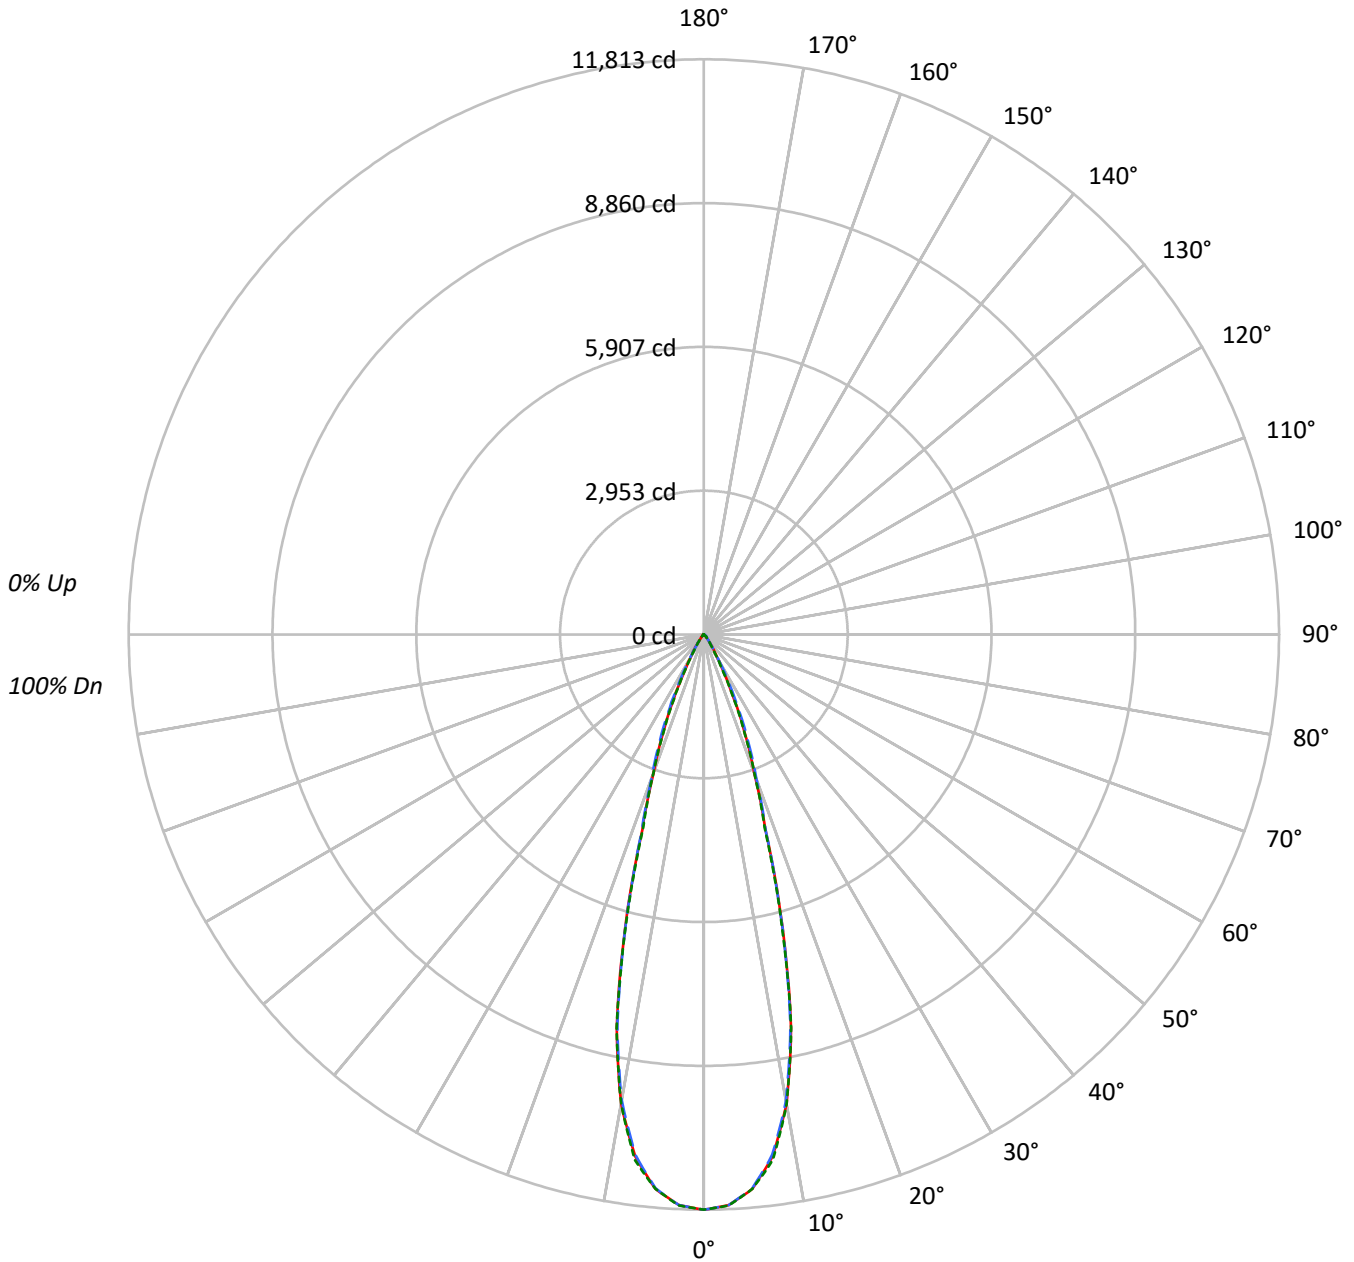



TEST NUMBER: P747555

CATALOG NUMBER: LD4D40BD010-EU4DR3040509030-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	904177	904177	904177
5°	878218	877196	878264
10°	760671	755308	760492
15°	496302	493632	491152
20°	246787	256048	246453
25°	124311	140181	121769
30°	49769	54233	43362
35°	23090	22108	18530
40°	9972	11071	9393
45°	7036	8725	7090
50°	2417	6359	2560
55°	1388	2629	1468
60°	980	1148	980
65°	634	634	634
70°	380	269	380
75°	0	177	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 8725 cd/sqm



TEST NUMBER: P747555

CATALOG NUMBER: LD4D40BD010-EU4DR3040509030-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1038.7	28.3
10°-20°	1672.9	45.5
20°-30°	722.9	19.7
30°-40°	164.8	4.5
40°-50°	56.6	1.5
50°-60°	13.8	0.4
60°-70°	3.6	0.1
70°-80°	0.4	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3434.5	93.5
0°-40°	3599.3	98.0
0°-60°	3669.7	99.9
0°-90°	3673.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3673.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	11813	11813	11813	11813	11813	
5°	11430	11419	11416	11440	11430	1040
15°	6263	6188	6229	6209	6198	1677
25°	1472	1528	1660	1489	1442	705
35°	247	252	237	235	198	168
45°	65	81	81	81	66	46
55°	10	11	20	12	11	10
65°	4	4	4	4	4	3
75°	0	0	1	0	0	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P747555

CATALOG NUMBER: LD4D40BD010-EU4DR3040509030-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	11812.6	11812.6	11812.6	11812.6	11812.6
2.5°	11734.3	11726.2	11730.8	11736.6	11738.9
5°	11429.8	11418.8	11416.5	11440.2	11430.4
7.5°	10815.6	10800.0	10776.2	10830.1	10880.6
10°	9786.8	9769.4	9717.8	9743.3	9784.5
12.5°	8267.9	8211.6	8210.5	8291.6	8280.6
15°	6263.0	6187.6	6229.3	6209.0	6198.0
17.5°	4211.6	4182.7	4238.3	4221.5	4149.0
20°	3029.7	3037.2	3143.4	3090.0	3025.6
22.5°	2210.8	2238.1	2363.9	2226.5	2176.0
25°	1471.9	1527.6	1659.8	1488.7	1441.8
27.5°	905.3	930.8	1064.8	893.7	868.2
30°	563.1	550.4	613.6	526.6	490.6
32.5°	369.4	353.2	373.5	335.2	306.2
35°	247.1	252.3	236.6	234.9	198.3
37.5°	154.3	177.5	156.6	167.0	127.6
40°	99.8	128.8	110.8	122.4	94.0
42.5°	81.8	99.2	91.1	96.9	83.5
45°	65.0	80.6	80.6	80.6	65.5
47.5°	36.0	53.9	69.0	55.1	38.3
50°	20.3	27.3	53.4	28.4	21.5
52.5°	13.9	15.7	36.5	16.2	14.5
55°	10.4	11.0	19.7	11.6	11.0
57.5°	8.1	8.7	10.4	8.7	8.1
60°	6.4	6.4	7.5	7.0	6.4
62.5°	4.6	4.6	5.2	4.6	4.6
65°	3.5	3.5	3.5	3.5	3.5
67.5°	1.7	2.3	2.3	2.3	2.3
70°	1.7	1.2	1.2	1.2	1.7
72.5°	1.2	0.6	0.6	0.6	0.6
75°	0.0	0.0	0.6	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)