

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P748873

Luminaire Tested: LD4D45BD010-EU4DR6540509027-4LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P748873
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D45BD010-EU4DR6540509027-4LBS1LI
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3873.9 lumens
Efficiency: N/A
Efficacy: 100.1 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct


Input Watts (W): 38.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P748873
CATALOG NUMBER: LD4D45BD010-EU4DR6540509027-4LBS1LI

Luminous Intensity Polar Plot

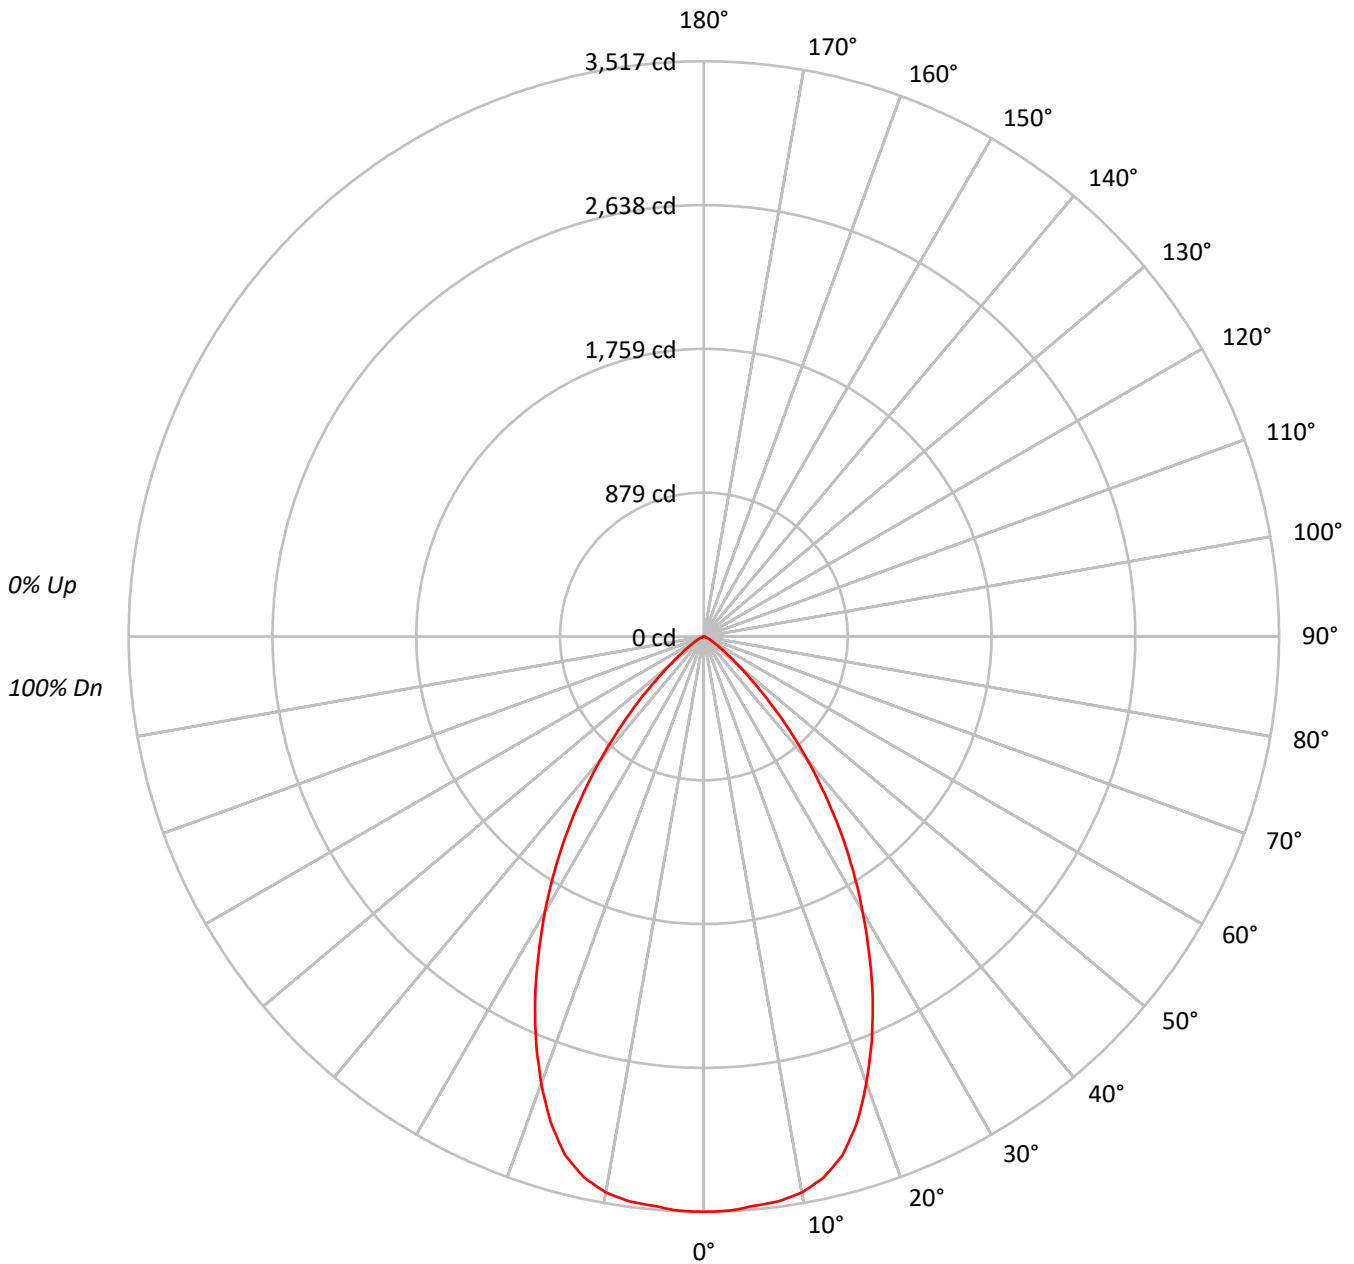



TEST NUMBER: P748873

CATALOG NUMBER: LD4D45BD010-EU4DR6540509027-4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93				93															
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85				85															
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78				78															
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72				72															
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66				66															
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61				61															
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56				56															
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52				52															
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49				49															
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46				46															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	205430
5°	204907
10°	204732
15°	198425
20°	180639
25°	157418
30°	130926
35°	103739
40°	74876
45°	47302
50°	24659
55°	13105
60°	6880
65°	3787
70°	1588
75°	1760
80°	1211
85°	1072

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 47302 cd/sqm



TEST NUMBER: P748873

CATALOG NUMBER: LD4D45BD010-EU4DR6540509027-4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	332.6	8.6
10°-20°	910.9	23.5
20°-30°	1113.4	28.7
30°-40°	903.4	23.3
40°-50°	450.2	11.6
50°-60°	125.6	3.2
60°-70°	28.5	0.7
70°-80°	7.4	0.2
80°-90°	1.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2356.9	60.8
0°-40°	3260.3	84.2
0°-60°	3836.0	99.0
0°-90°	3873.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3873.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3517	
5°	3495	333
15°	3282	911
25°	2443	1113
35°	1455	903
45°	573	450
55°	129	126
65°	27	29
75°	8	7
85°	2	2
90°	0	



TEST NUMBER: P748873

CATALOG NUMBER: LD4D45BD010-EU4DR6540509027-4LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	3517.4
2.5°	3514.8
5°	3495.1
7.5°	3483.8
10°	3452.2
12.5°	3388.1
15°	3281.7
17.5°	3115.2
20°	2906.4
22.5°	2681.0
25°	2442.8
27.5°	2187.9
30°	1941.4
32.5°	1697.9
35°	1455.0
37.5°	1212.6
40°	982.1
42.5°	766.0
45°	572.7
47.5°	399.0
50°	271.4
52.5°	187.1
55°	128.7
57.5°	86.8
60°	58.9
62.5°	40.8
65°	27.4
67.5°	14.0
70°	9.3
72.5°	8.8
75°	7.8
77.5°	5.2
80°	3.6
82.5°	2.6
85°	1.6
87.5°	1.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)