

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P748666

Luminaire Tested: LD4D45BD010-EU4DR5040509035-4LBS1MW

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P748666  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D45BD010-EU4DR5040509035-4LBS1MW  
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 50° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4319.6 lumens  
Efficiency: N/A  
Efficacy: 111.6 lumens/watt  
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 38.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P748666

CATALOG NUMBER: LD4D45BD010-EU4DR5040509035-4LBS1MW

### Luminous Intensity Polar Plot

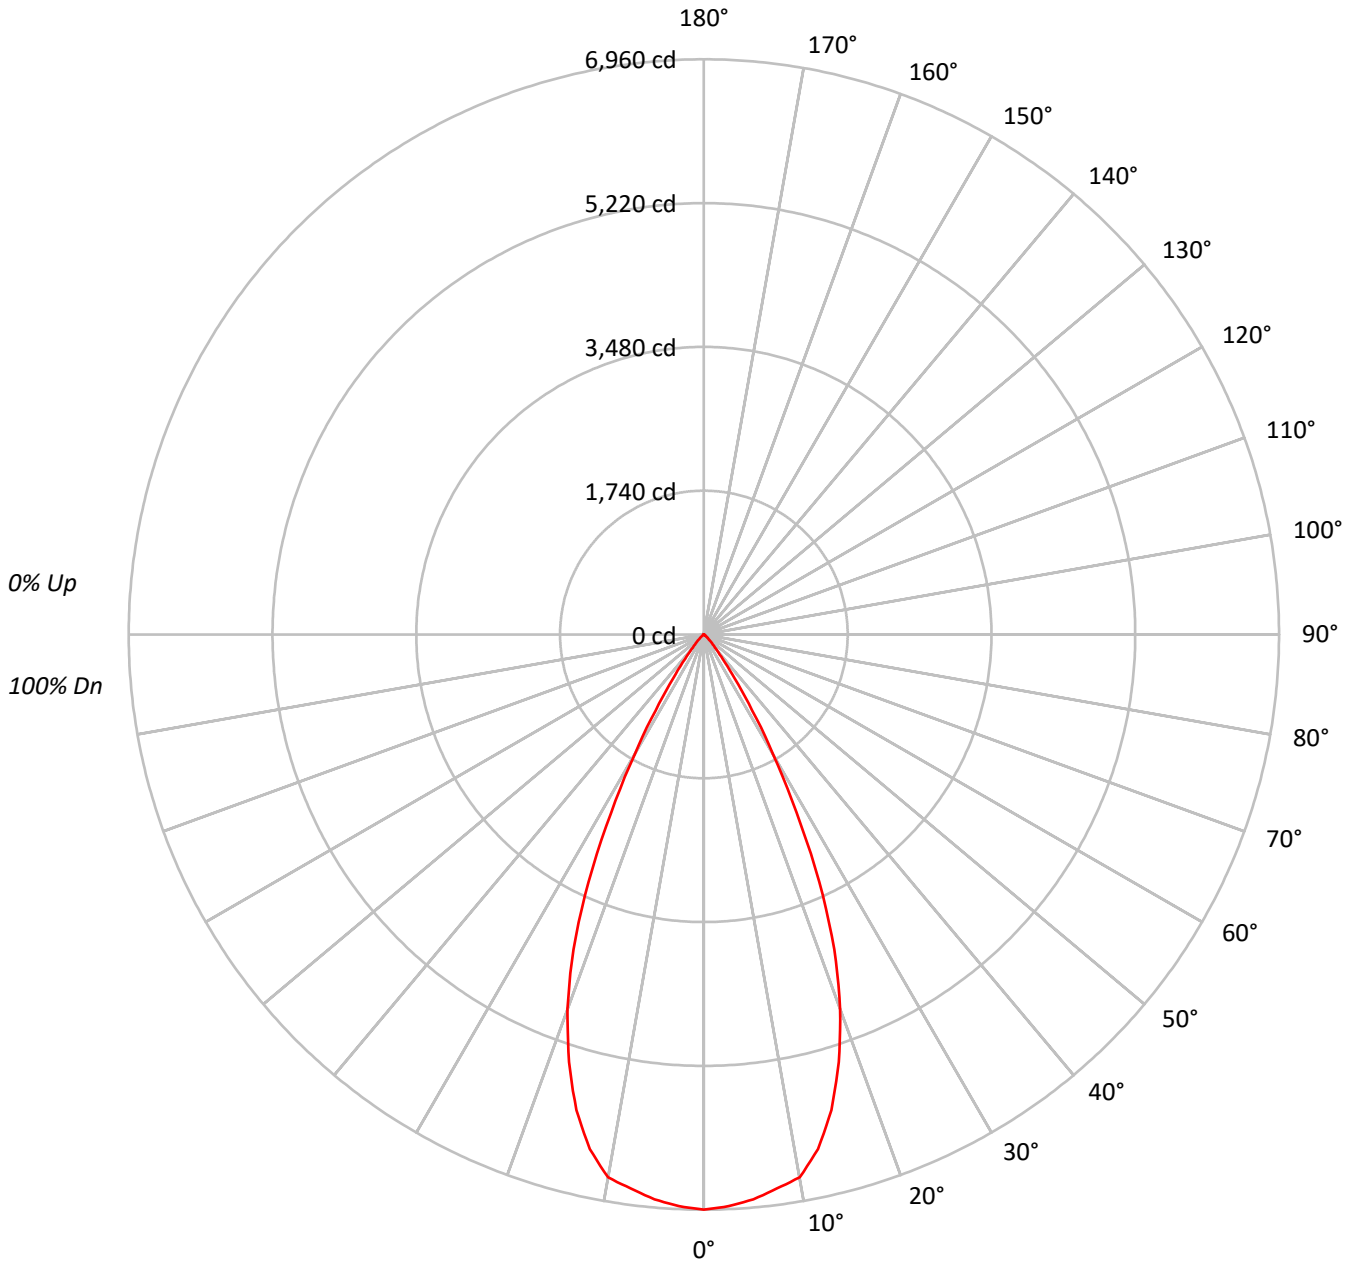



TEST NUMBER: P748666

CATALOG NUMBER: LD4D45BD010-EU4DR5040509035-4LBS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	112	109	107	112	110	108	106	106	104	102	102	101	99	98	97	97	95																			
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90																			
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85																			
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80																			
5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76																			
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72																			
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69																			
8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65																			
9	81	73	68	64	80	72	67	64	71	67	64	71	67	64	70	66	63	62																			
10	78	70	64	61	77	69	64	61	68	64	61	68	64	61	67	63	60	59																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	760444
5°	752480
10°	740078
15°	673906
20°	560761
25°	398064
30°	210693
35°	85858
40°	31892
45°	14602
50°	5983
55°	3124
60°	1530
65°	465
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 14602 cd/sqm



TEST NUMBER: P748666

CATALOG NUMBER: LD4D45BD010-EU4DR5040509035-4LBS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	648.5	15.0
10°-20°	1638.9	37.9
20°-30°	1472.1	34.1
30°-40°	460.9	10.7
40°-50°	80.7	1.9
50°-60°	16.1	0.4
60°-70°	2.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3759.5	87.0
0°-40°	4220.4	97.7
0°-60°	4317.1	99.9
0°-90°	4319.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4319.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6960	
5°	6861	648
15°	5958	1639
25°	3302	1472
35°	644	461
45°	94	81
55°	16	16
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P748666

CATALOG NUMBER: LD4D45BD010-EU4DR5040509035-4LBS1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	6959.9
2.5°	6925.3
5°	6860.8
7.5°	6762.2
10°	6670.6
12.5°	6377.3
15°	5957.7
17.5°	5424.9
20°	4822.8
22.5°	4126.3
25°	3301.9
27.5°	2427.6
30°	1670.0
32.5°	1087.3
35°	643.7
37.5°	369.7
40°	223.6
42.5°	145.5
45°	94.5
47.5°	57.5
50°	35.2
52.5°	24.1
55°	16.4
57.5°	11.1
60°	7.0
62.5°	4.1
65°	1.8
67.5°	0.6
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)