

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P748910

Luminaire Tested: LD4D45BD010-EU4DR6540509040-4LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P748910
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D45BD010-EU4DR6540509040-4LBS1B
Description: 4 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3732.9 lumens
Efficiency: N/A
Efficacy: 96.5 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct


Input Watts (W): 38.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P748910
CATALOG NUMBER: LD4D45BD010-EU4DR6540509040-4LBS1B

Luminous Intensity Polar Plot

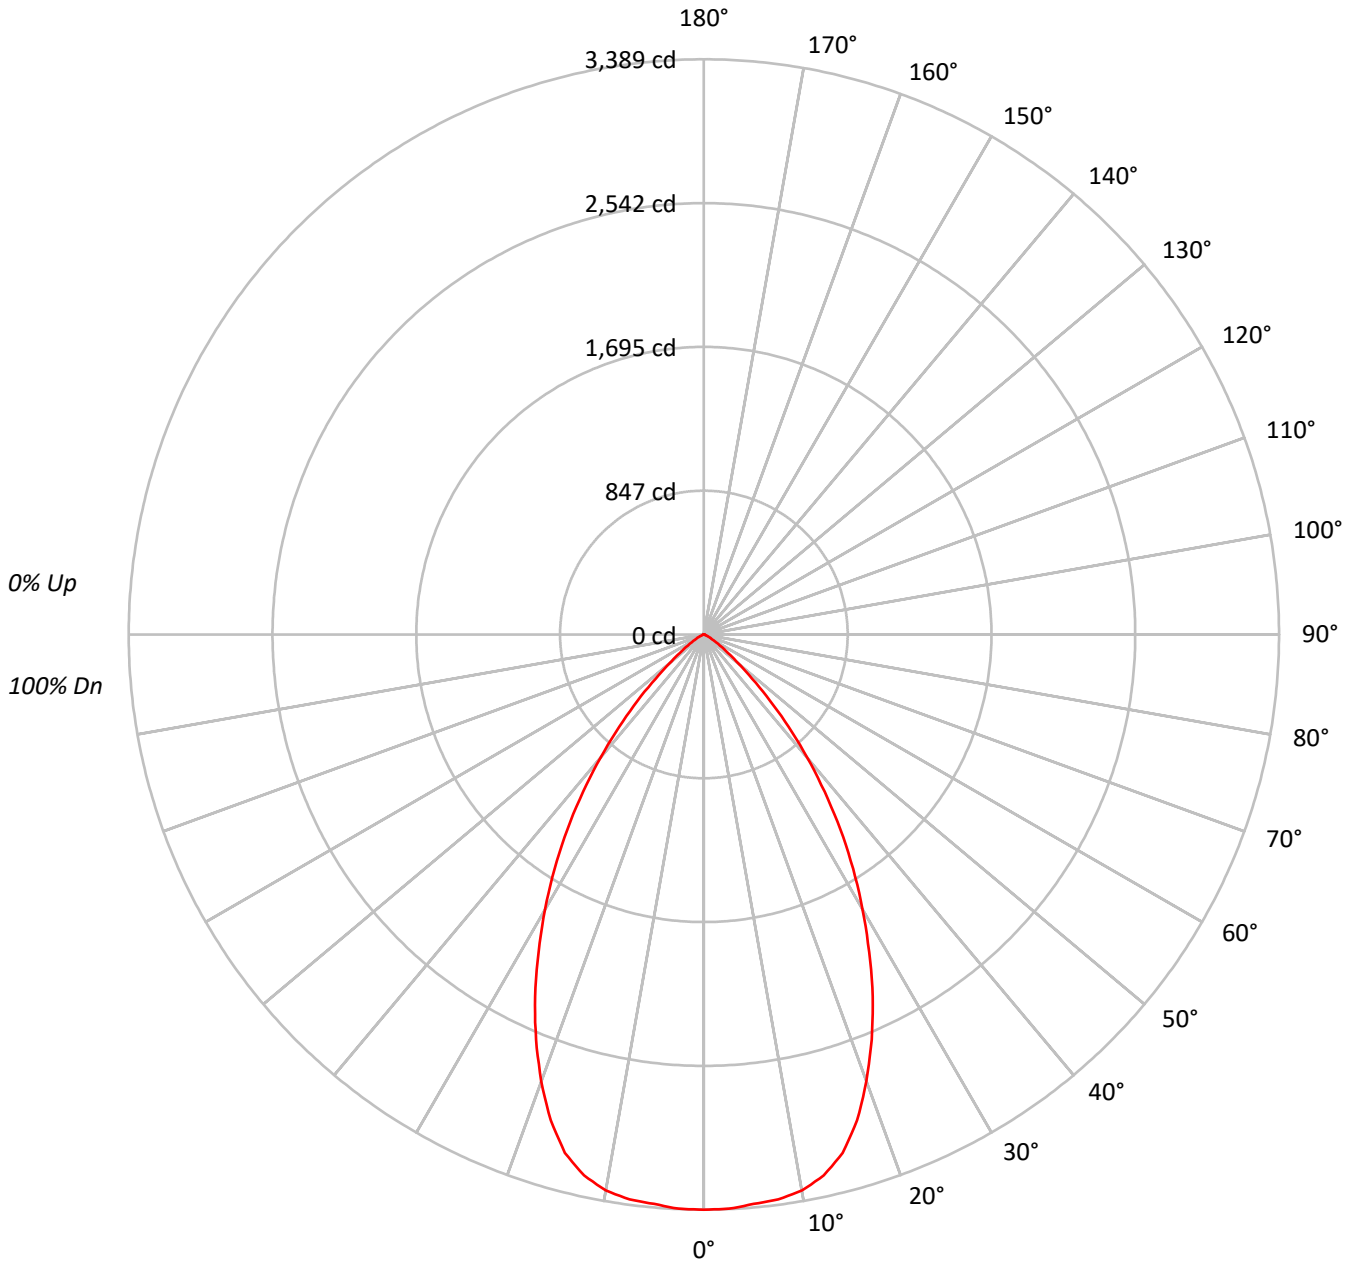



TEST NUMBER: P748910

CATALOG NUMBER: LD4D45BD010-EU4DR6540509040-4LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	197948
5°	197450
10°	197283
15°	191200
20°	174063
25°	151689
30°	126158
35°	99967
40°	72147
45°	45584
50°	23760
55°	12626
60°	6635
65°	3648
70°	1537
75°	1692
80°	1177
85°	1005

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 45584 cd/sqm



TEST NUMBER: P748910

CATALOG NUMBER: LD4D45BD010-EU4DR6540509040-4LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	320.5	8.6
10°-20°	877.7	23.5
20°-30°	1072.9	28.7
30°-40°	870.5	23.3
40°-50°	433.8	11.6
50°-60°	121.0	3.2
60°-70°	27.5	0.7
70°-80°	7.2	0.2
80°-90°	1.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2271.1	60.8
0°-40°	3141.6	84.2
0°-60°	3696.4	99.0
0°-90°	3732.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3732.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3389	
5°	3368	321
15°	3162	878
25°	2354	1073
35°	1402	870
45°	552	434
55°	124	121
65°	26	27
75°	8	7
85°	2	2
90°	0	



TEST NUMBER: P748910

CATALOG NUMBER: LD4D45BD010-EU4DR6540509040-4LBS1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	3389.3
2.5°	3386.8
5°	3367.9
7.5°	3357.0
10°	3326.6
12.5°	3264.8
15°	3162.2
17.5°	3001.8
20°	2800.6
22.5°	2583.5
25°	2353.9
27.5°	2108.3
30°	1870.7
32.5°	1636.1
35°	1402.1
37.5°	1168.5
40°	946.3
42.5°	738.1
45°	551.9
47.5°	384.5
50°	261.5
52.5°	180.3
55°	124.0
57.5°	83.7
60°	56.8
62.5°	39.3
65°	26.4
67.5°	13.4
70°	9.0
72.5°	8.5
75°	7.5
77.5°	5.0
80°	3.5
82.5°	2.5
85°	1.5
87.5°	1.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)