

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P748297

Luminaire Tested: LD4D45BD010-EU4DR2540509050-4LBDP1LI

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P748297
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D45BD010-EU4DR2540509050-4LBDP1LI
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 25° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4118.7 lumens
Efficiency: N/A
Efficacy: 106.4 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.45
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 38.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P748297

CATALOG NUMBER: LD4D45BD010-EU4DR2540509050-4LBDP1LI

Luminous Intensity Polar Plot

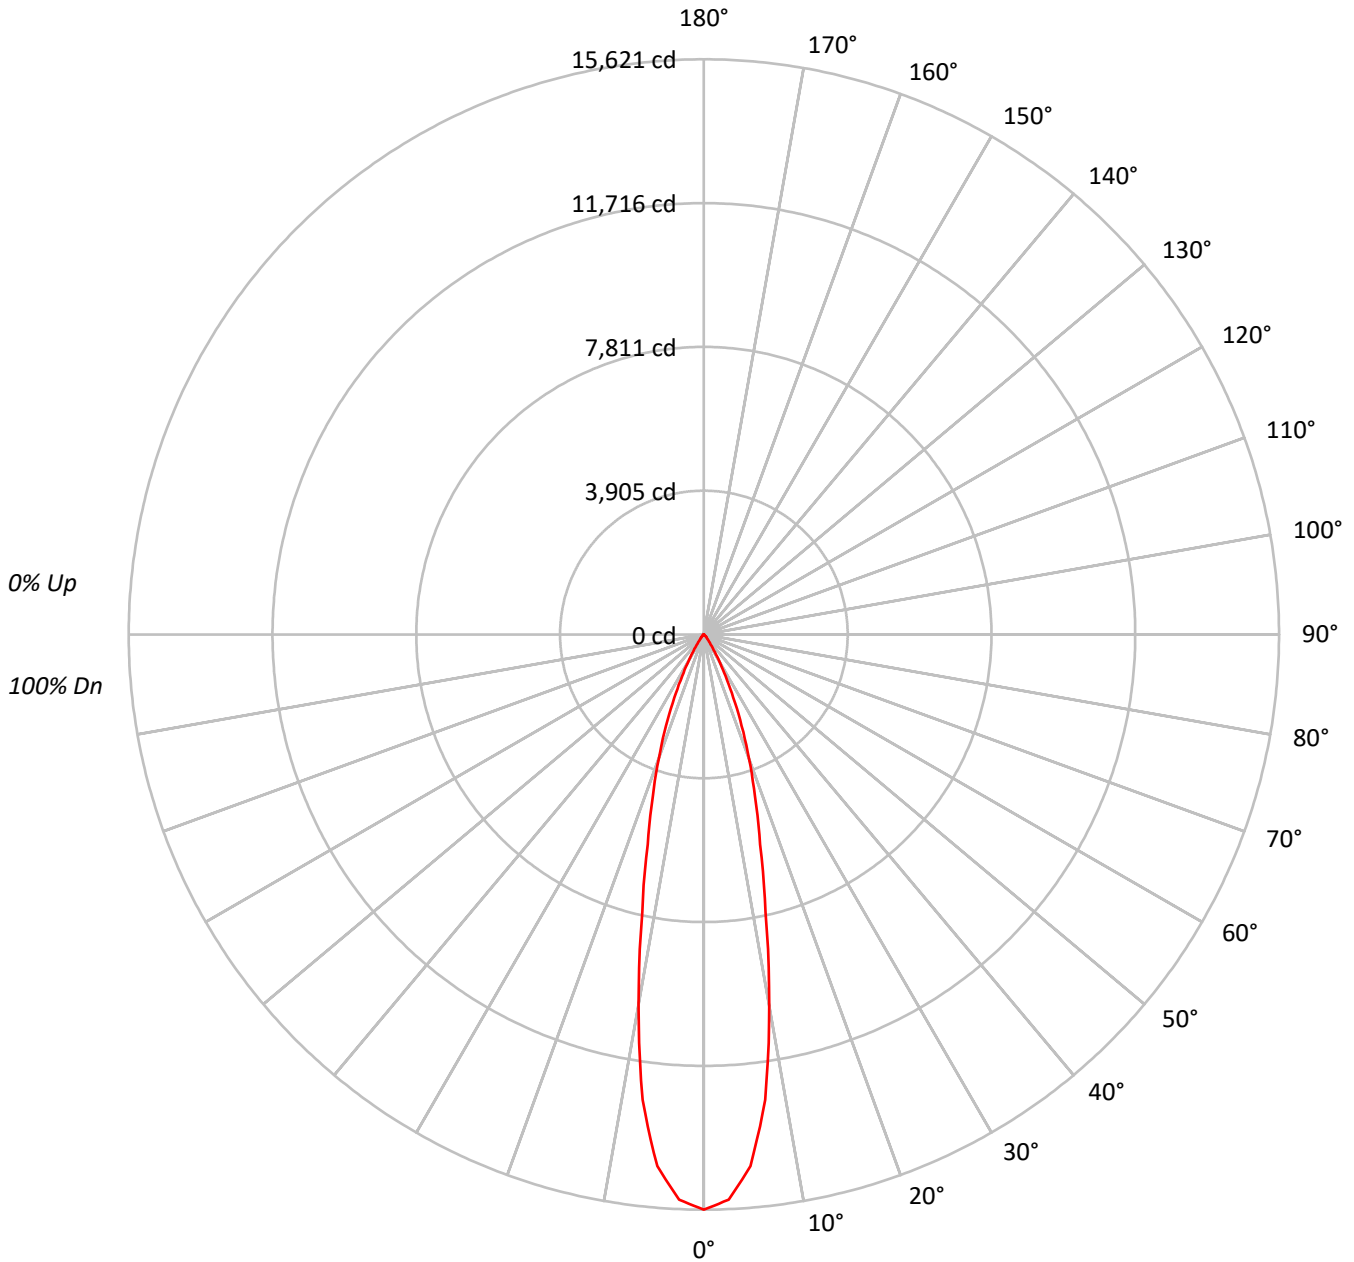



TEST NUMBER: P748297

CATALOG NUMBER: LD4D45BD010-EU4DR2540509050-4LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																											
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																											
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																											
4	103	97	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																											
5	100	93	89	86	98	93	89	86	91	87	85	89	86	84	88	85	83	82																											
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																											
7	93	87	82	79	92	86	82	79	85	81	78	84	80	78	83	80	78	77																											
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																											
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																											
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																											

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1706773
5°	1589642
10°	1133938
15°	667843
20°	415548
25°	228056
30°	104299
35°	39495
40°	17886
45°	10754
50°	4470
55°	2876
60°	2010
65°	1370
70°	224
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 10754 cd/sqm



TEST NUMBER: P748297

CATALOG NUMBER: LD4D45BD010-EU4DR2540509050-4LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1245.6	30.2
10°-20°	1687.1	41.0
20°-30°	892.8	21.7
30°-40°	220.4	5.4
40°-50°	53.8	1.3
50°-60°	14.1	0.3
60°-70°	4.8	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3825.5	92.9
0°-40°	4045.9	98.2
0°-60°	4113.8	99.9
0°-90°	4118.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4118.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	15621	
5°	14494	###
15°	5904	1687
25°	1892	893
35°	296	220
45°	70	54
55°	15	14
65°	5	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P748297

CATALOG NUMBER: LD4D45BD010-EU4DR2540509050-4LBDP1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	15621.1
2.5°	15364.4
5°	14493.7
7.5°	12744.5
10°	10220.6
12.5°	7726.2
15°	5904.1
17.5°	4601.4
20°	3573.9
22.5°	2680.2
25°	1891.7
27.5°	1268.5
30°	826.7
32.5°	503.0
35°	296.1
37.5°	181.2
40°	125.4
42.5°	95.9
45°	69.6
47.5°	42.0
50°	26.3
52.5°	19.0
55°	15.1
57.5°	11.8
60°	9.2
62.5°	7.2
65°	5.3
67.5°	2.0
70°	0.7
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)