

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740075

Luminaire Tested: LD4D05D010-EU4DR300210IC9024-4LBDP1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P740075
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D05D010-EU4DR300210IC9024-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 482.9 lumens
Efficiency: N/A
Efficacy: 64.4 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P740075
CATALOG NUMBER: LD4D05D010-EU4DR300210IC9024-4LBDP1MW

Luminous Intensity Polar Plot

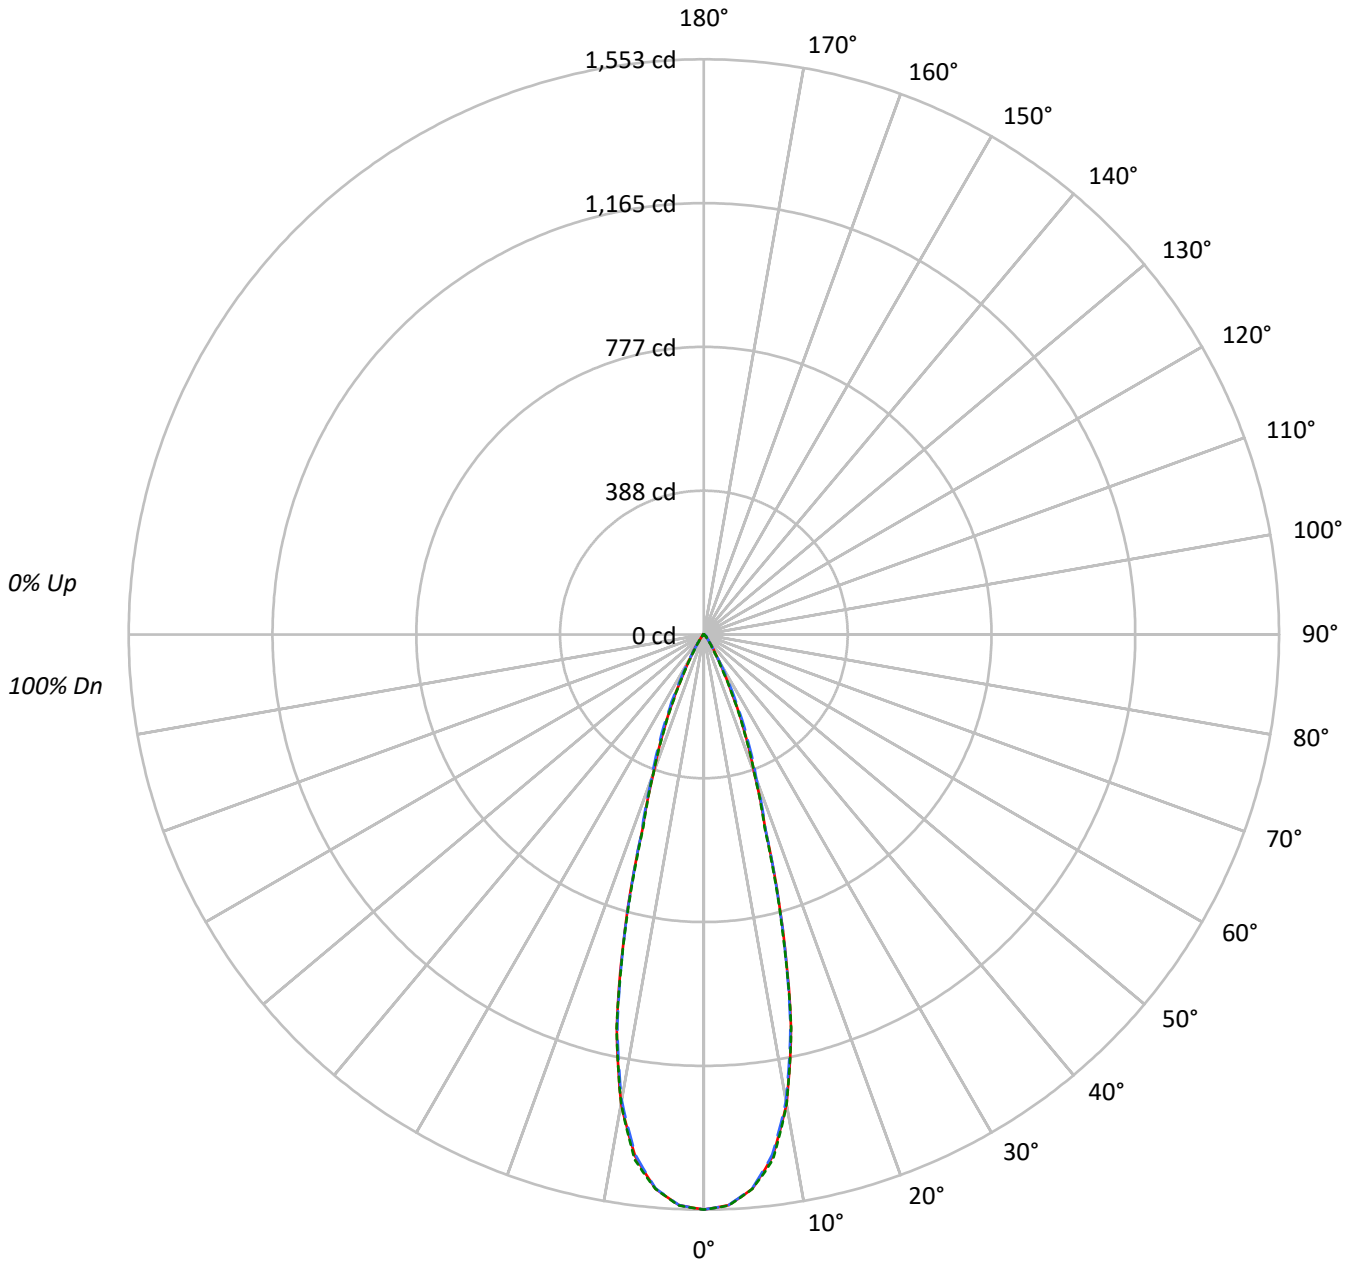



TEST NUMBER: P740075

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9024-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	118857	118857	118857
5°	115438	115307	115446
10°	99984	99285	99969
15°	65241	64893	64560
20°	32444	33658	32395
25°	16342	18428	16004
30°	6540	7133	5701
35°	3037	2906	2439
40°	1309	1459	1239
45°	920	1147	931
50°	322	834	333
55°	187	347	187
60°	138	153	138
65°	91	91	91
70°	45	45	45
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 1147 cd/sqm



TEST NUMBER: P740075

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9024-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	136.5	28.3
10°-20°	219.9	45.5
20°-30°	95.0	19.7
30°-40°	21.7	4.5
40°-50°	7.4	1.5
50°-60°	1.8	0.4
60°-70°	0.5	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	451.5	93.5
0°-40°	473.1	98.0
0°-60°	482.4	99.9
0°-90°	482.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	482.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1553	1553	1553	1553	1553	
5°	1502	1501	1501	1504	1502	137
15°	823	813	819	816	815	220
25°	194	201	218	196	190	93
35°	32	33	31	31	26	22
45°	8	11	11	11	9	6
55°	1	1	3	2	1	1
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P740075

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9024-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1552.8	1552.8	1552.8	1552.8	1552.8
2.5°	1542.5	1541.4	1542.0	1542.8	1543.1
5°	1502.4	1501.0	1500.7	1503.8	1502.5
7.5°	1421.7	1419.7	1416.5	1423.6	1430.3
10°	1286.4	1284.2	1277.4	1280.8	1286.2
12.5°	1086.8	1079.4	1079.3	1089.9	1088.5
15°	823.3	813.4	818.9	816.2	814.7
17.5°	553.6	549.8	557.1	554.9	545.4
20°	398.3	399.2	413.2	406.2	397.7
22.5°	290.6	294.2	310.7	292.7	286.0
25°	193.5	200.8	218.2	195.7	189.5
27.5°	119.0	122.4	140.0	117.5	114.1
30°	74.0	72.4	80.7	69.2	64.5
32.5°	48.6	46.4	49.1	44.1	40.3
35°	32.5	33.2	31.1	30.9	26.1
37.5°	20.3	23.3	20.6	21.9	16.8
40°	13.1	16.9	14.6	16.1	12.4
42.5°	10.8	13.1	12.0	12.7	11.0
45°	8.5	10.6	10.6	10.6	8.6
47.5°	4.7	7.1	9.1	7.2	5.0
50°	2.7	3.6	7.0	3.7	2.8
52.5°	1.8	2.1	4.8	2.1	1.9
55°	1.4	1.4	2.6	1.5	1.4
57.5°	1.1	1.1	1.4	1.1	1.1
60°	0.9	0.9	1.0	0.9	0.9
62.5°	0.6	0.6	0.7	0.6	0.6
65°	0.5	0.5	0.5	0.5	0.5
67.5°	0.2	0.3	0.3	0.3	0.3
70°	0.2	0.2	0.2	0.2	0.2
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)