

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740079

Luminaire Tested: LD4D05D010-EU4DR300210IC9024-4LBS1MW

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P740079  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D05D010-EU4DR300210IC9024-4LBS1MW  
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 30° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 541.6 lumens  
Efficiency: N/A  
Efficacy: 72.2 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49  
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P740079  
CATALOG NUMBER: LD4D05D010-EU4DR300210IC9024-4LBS1MW

### Luminous Intensity Polar Plot

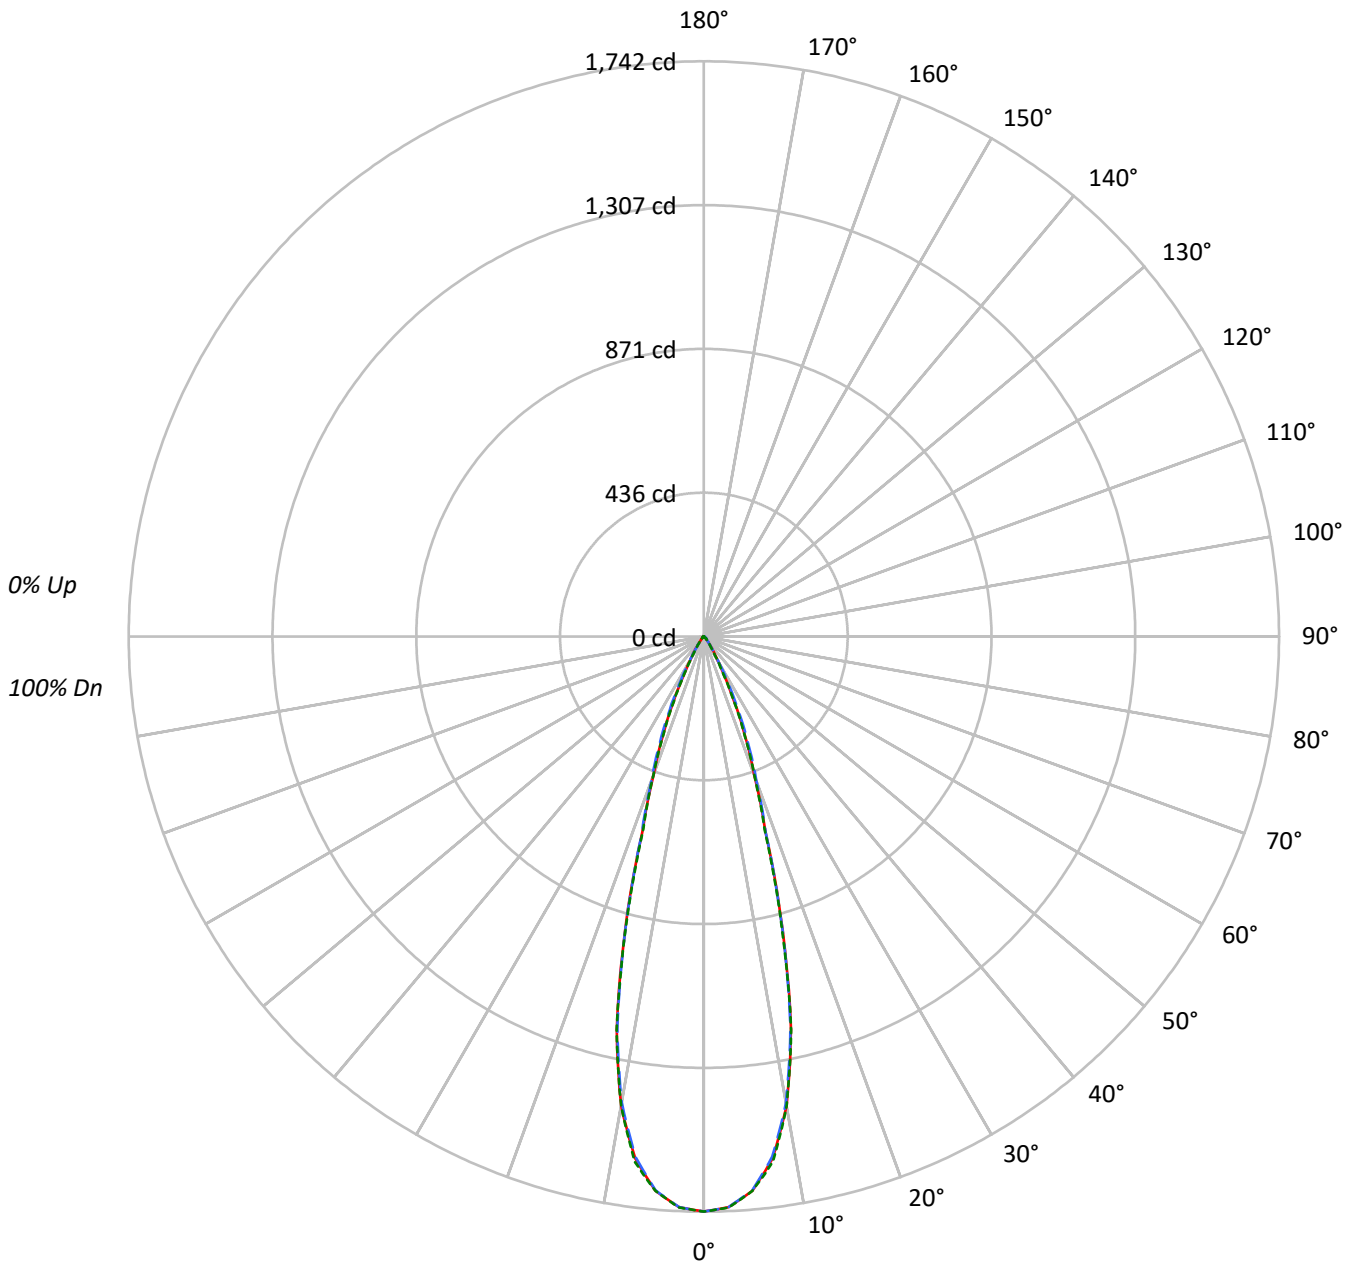



TEST NUMBER: P740079

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9024-4LBS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	87	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	133316	133316	133316
5°	129484	129338	129491
10°	112156	111363	112125
15°	73173	72777	72421
20°	36386	37755	36337
25°	18327	20666	17955
30°	7336	7999	6399
35°	3401	3261	2729
40°	1469	1629	1389
45°	1039	1288	1050
50°	357	929	381
55°	200	387	214
60°	138	168	138
65°	91	91	91
70°	45	45	45
75°	0	30	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°  
 Vertical Angle: 45°  
 Luminance: 1288 cd/sqm



TEST NUMBER: P740079

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9024-4LBS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	153.2	28.3
10°-20°	246.7	45.5
20°-30°	106.6	19.7
30°-40°	24.3	4.5
40°-50°	8.3	1.5
50°-60°	2.0	0.4
60°-70°	0.5	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	506.4	93.5
0°-40°	530.7	98.0
0°-60°	541.1	99.9
0°-90°	541.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	541.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1742	1742	1742	1742	1742	
5°	1685	1684	1683	1687	1685	153
15°	923	912	918	916	914	247
25°	217	225	245	220	213	104
35°	36	37	35	35	29	25
45°	10	12	12	12	10	7
55°	2	2	3	2	2	1
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P740079

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9024-4LBS1MW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1741.7	1741.7	1741.7	1741.7	1741.7
2.5°	1730.1	1728.9	1729.6	1730.5	1730.8
5°	1685.2	1683.6	1683.3	1686.8	1685.3
7.5°	1594.7	1592.3	1588.8	1596.8	1604.3
10°	1443.0	1440.4	1432.8	1436.6	1442.6
12.5°	1219.0	1210.8	1210.6	1222.6	1220.9
15°	923.4	912.3	918.4	915.5	913.9
17.5°	621.0	616.7	624.9	622.5	611.7
20°	446.7	447.8	463.5	455.6	446.1
22.5°	326.0	330.0	348.5	328.3	320.9
25°	217.0	225.2	244.7	219.5	212.6
27.5°	133.5	137.2	157.0	131.8	128.0
30°	83.0	81.1	90.5	77.6	72.4
32.5°	54.5	52.1	55.1	49.4	45.1
35°	36.4	37.2	34.9	34.6	29.2
37.5°	22.7	26.2	23.1	24.6	18.8
40°	14.7	19.0	16.3	18.0	13.9
42.5°	12.0	14.6	13.4	14.3	12.3
45°	9.6	11.9	11.9	11.9	9.7
47.5°	5.3	8.0	10.2	8.1	5.7
50°	3.0	4.0	7.8	4.2	3.2
52.5°	2.1	2.3	5.4	2.4	2.1
55°	1.5	1.6	2.9	1.7	1.6
57.5°	1.2	1.3	1.5	1.3	1.2
60°	0.9	0.9	1.1	1.0	0.9
62.5°	0.7	0.7	0.7	0.7	0.7
65°	0.5	0.5	0.5	0.5	0.5
67.5°	0.2	0.3	0.3	0.3	0.3
70°	0.2	0.2	0.2	0.2	0.2
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)