

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740696

Luminaire Tested: LD4D05D010-EU4DR700210IC9024-4LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P740696
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D05D010-EU4DR700210IC9024-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 325.5 lumens
Efficiency: N/A
Efficacy: 43.4 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P740696

CATALOG NUMBER: LD4D05D010-EU4DR700210IC9024-4LBDP1B

Luminous Intensity Polar Plot

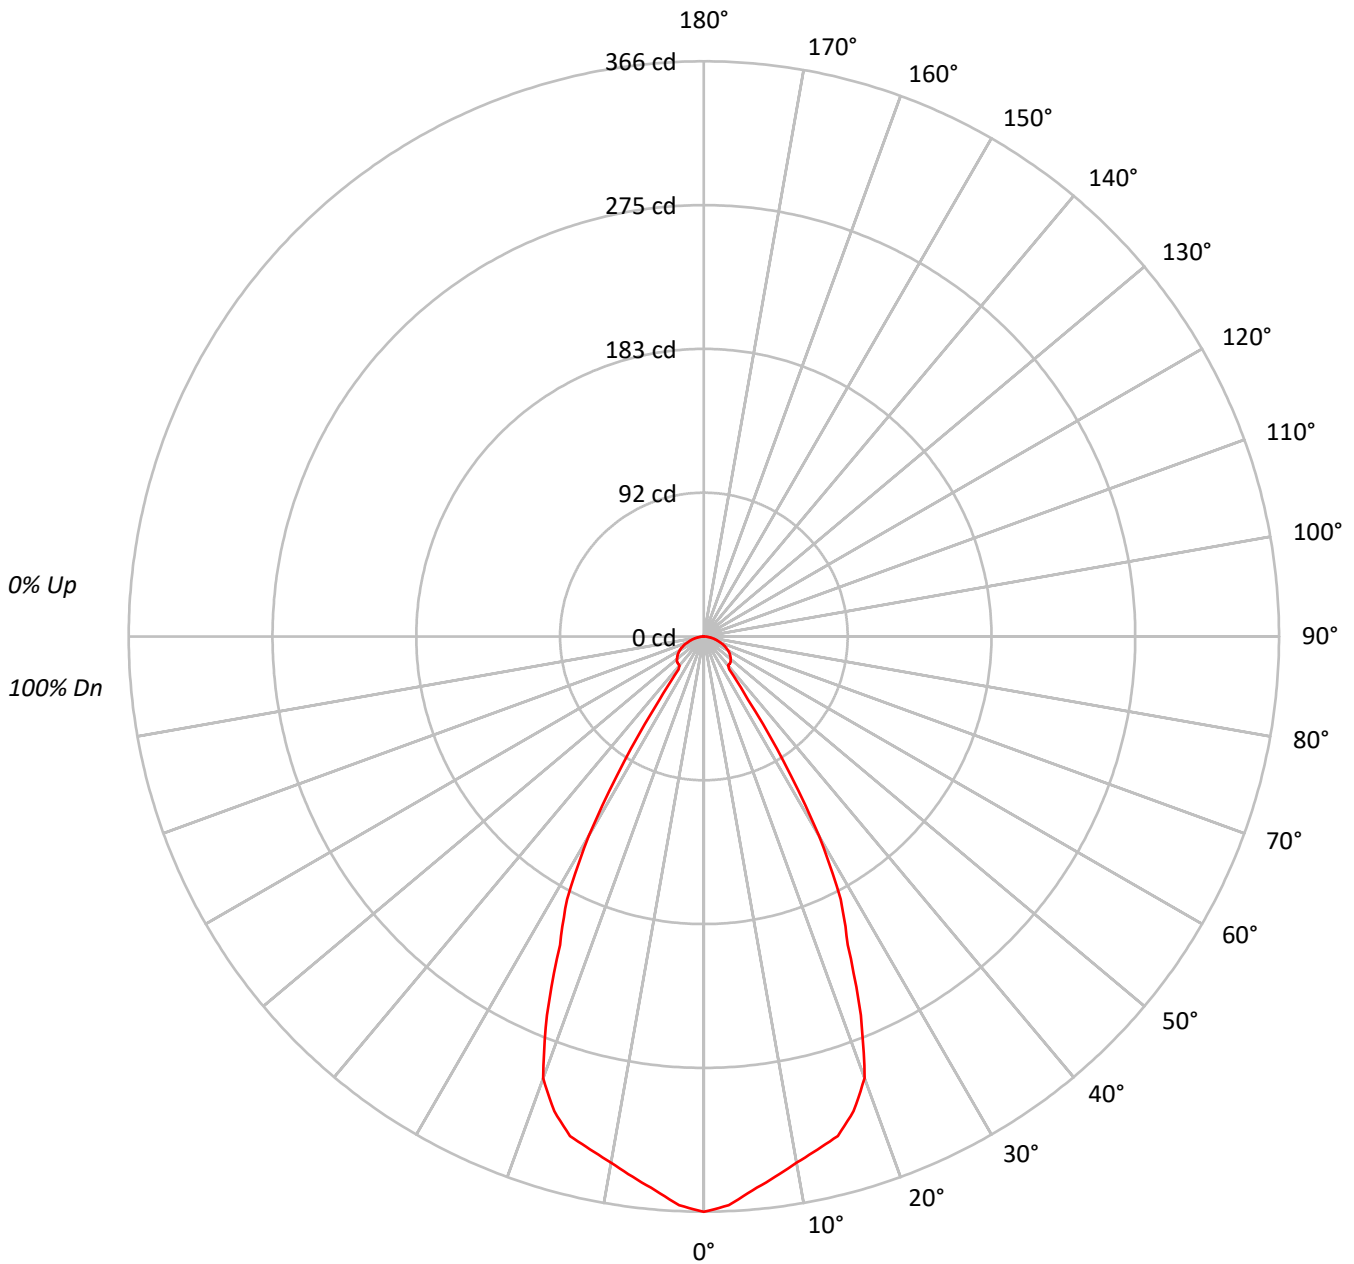



TEST NUMBER: P740696

CATALOG NUMBER: LD4D05D010-EU4DR700210IC9024-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	88	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	40000
5°	38804
10°	37722
15°	37226
20°	34766
25°	26112
30°	18458
35°	6536
40°	3437
45°	3662
50°	3791
55°	3867
60°	3890
65°	3800
70°	3578
75°	3335
80°	2957
85°	2382

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 60°
 Luminance: 3890 cd/sqm



TEST NUMBER: P740696

CATALOG NUMBER: LD4D05D010-EU4DR700210IC9024-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	33.4	10.3
10°-20°	91.5	28.1
20°-30°	100.8	31.0
30°-40°	38.5	11.8
40°-50°	18.2	5.6
50°-60°	18.1	5.6
60°-70°	14.5	4.4
70°-80°	8.3	2.6
80°-90°	2.2	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	225.7	69.3
0°-40°	264.2	81.2
0°-60°	300.5	92.3
0°-90°	325.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	325.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	366	
5°	354	33
15°	329	92
25°	217	101
35°	49	39
45°	24	18
55°	20	18
65°	15	14
75°	8	8
85°	2	2
90°	0	



TEST NUMBER: P740696

CATALOG NUMBER: LD4D05D010-EU4DR700210IC9024-4LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	366.1
2.5°	362.2
5°	353.8
7.5°	346.8
10°	340.0
12.5°	334.3
15°	329.1
17.5°	316.7
20°	299.0
22.5°	260.9
25°	216.6
27.5°	188.6
30°	146.3
32.5°	94.5
35°	49.0
37.5°	26.5
40°	24.1
42.5°	23.9
45°	23.7
47.5°	23.2
50°	22.3
52.5°	21.3
55°	20.3
57.5°	19.1
60°	17.8
62.5°	16.3
65°	14.7
67.5°	13.0
70°	11.2
72.5°	9.5
75°	7.9
77.5°	6.2
80°	4.7
82.5°	3.3
85°	1.9
87.5°	0.7
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)