

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740699

Luminaire Tested: LD4D05D010-EU4DR700210IC9024-4LBDP1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P740699  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D05D010-EU4DR700210IC9024-4LBDP1MW  
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 437.1 lumens  
Efficiency: N/A  
Efficacy: 58.3 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P740699  
CATALOG NUMBER: LD4D05D010-EU4DR700210IC9024-4LBDP1MW

### Luminous Intensity Polar Plot

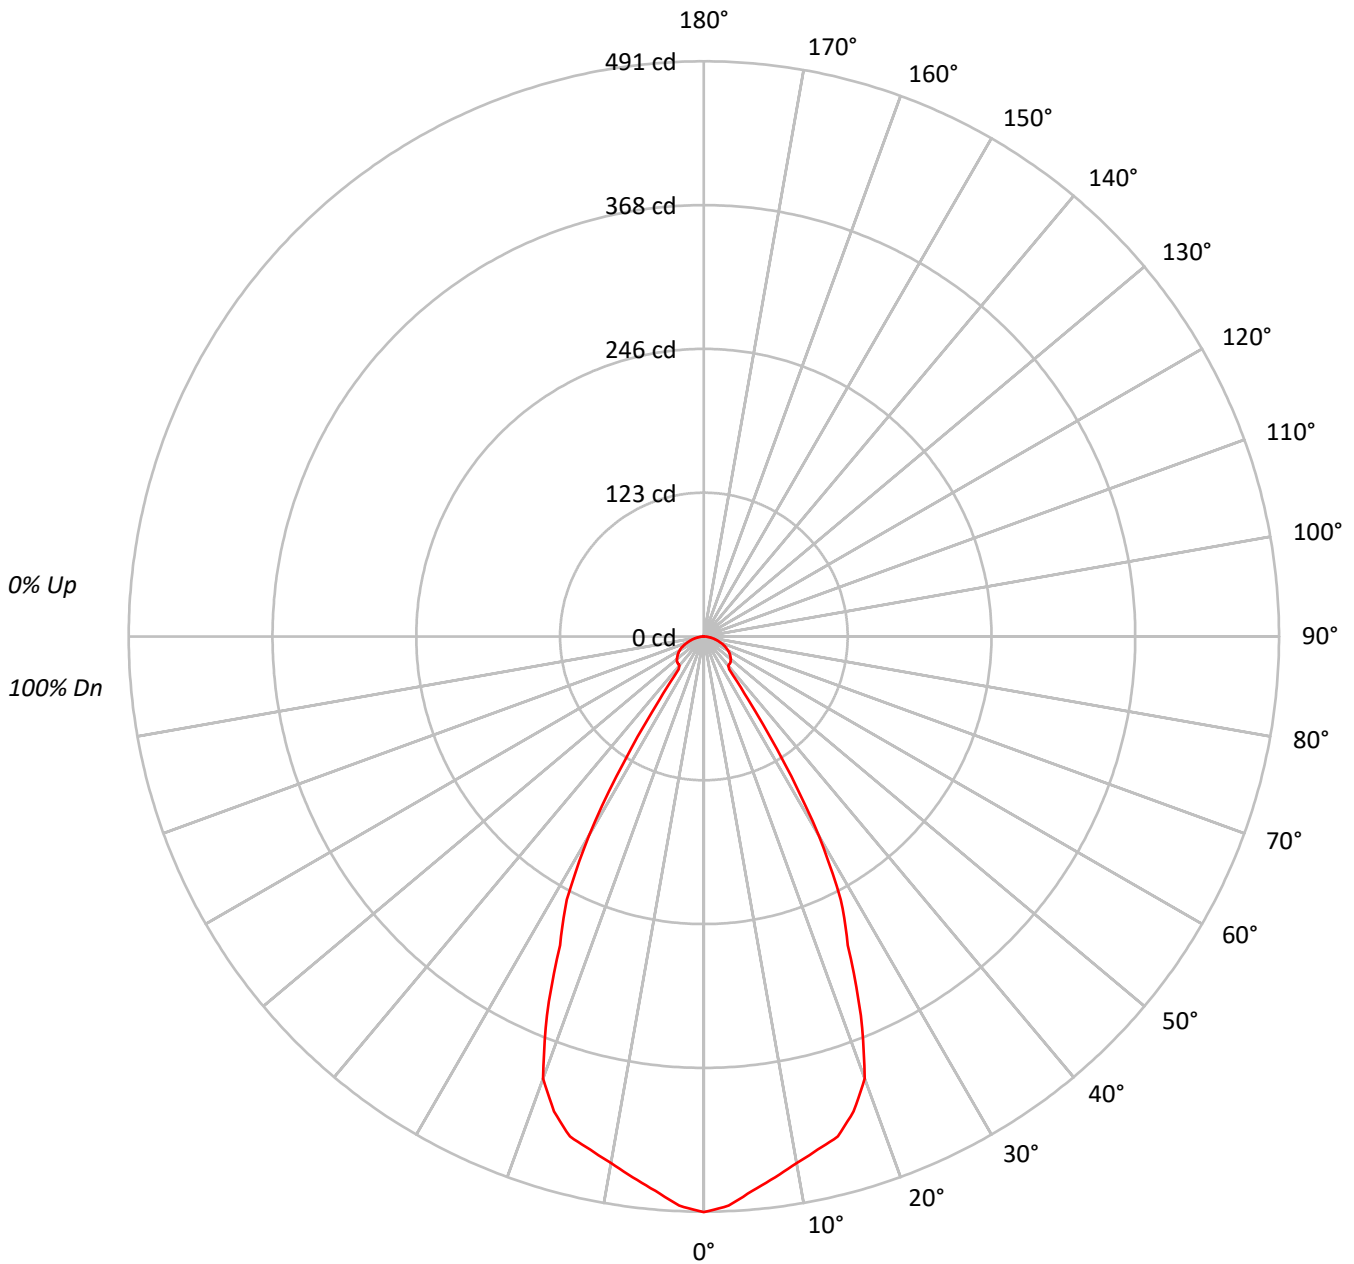



TEST NUMBER: P740699

CATALOG NUMBER: LD4D05D010-EU4DR700210IC9024-4LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	53691
5°	52097
10°	50647
15°	49986
20°	46672
25°	35058
30°	24791
35°	8777
40°	4621
45°	4914
50°	5099
55°	5181
60°	5223
65°	5119
70°	4824
75°	4475
80°	3964
85°	3259

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 57.5°  
 Luminance: 5226 cd/sqm



TEST NUMBER: P740699

CATALOG NUMBER: LD4D05D010-EU4DR700210IC9024-4LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	44.8	10.2
10°-20°	122.9	28.1
20°-30°	135.4	31.0
30°-40°	51.7	11.8
40°-50°	24.4	5.6
50°-60°	24.3	5.6
60°-70°	19.4	4.4
70°-80°	11.2	2.6
80°-90°	3.0	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	303.0	69.3
0°-40°	354.8	81.2
0°-60°	403.4	92.3
0°-90°	437.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	437.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	491	
5°	475	45
15°	442	123
25°	291	135
35°	66	52
45°	32	24
55°	27	24
65°	20	19
75°	11	11
85°	3	3
90°	0	



TEST NUMBER: P740699

CATALOG NUMBER: LD4D05D010-EU4DR700210IC9024-4LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	491.4
2.5°	486.3
5°	475.0
7.5°	465.6
10°	456.5
12.5°	448.7
15°	441.9
17.5°	425.1
20°	401.4
22.5°	350.2
25°	290.8
27.5°	253.2
30°	196.5
32.5°	126.9
35°	65.8
37.5°	35.6
40°	32.4
42.5°	32.1
45°	31.8
47.5°	31.1
50°	30.0
52.5°	28.6
55°	27.2
57.5°	25.7
60°	23.9
62.5°	21.9
65°	19.8
67.5°	17.4
70°	15.1
72.5°	12.8
75°	10.6
77.5°	8.3
80°	6.3
82.5°	4.4
85°	2.6
87.5°	1.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)