

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P739866

Luminaire Tested: LD4D05D010-EU4DR150210IC9030-4LBDP1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P739866
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D05D010-EU4DR150210IC9030-4LBDP1LI
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 15° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 673.8 lumens
Efficiency: N/A
Efficacy: 89.8 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P739866

CATALOG NUMBER: LD4D05D010-EU4DR150210IC9030-4LBDP1LI

Luminous Intensity Polar Plot

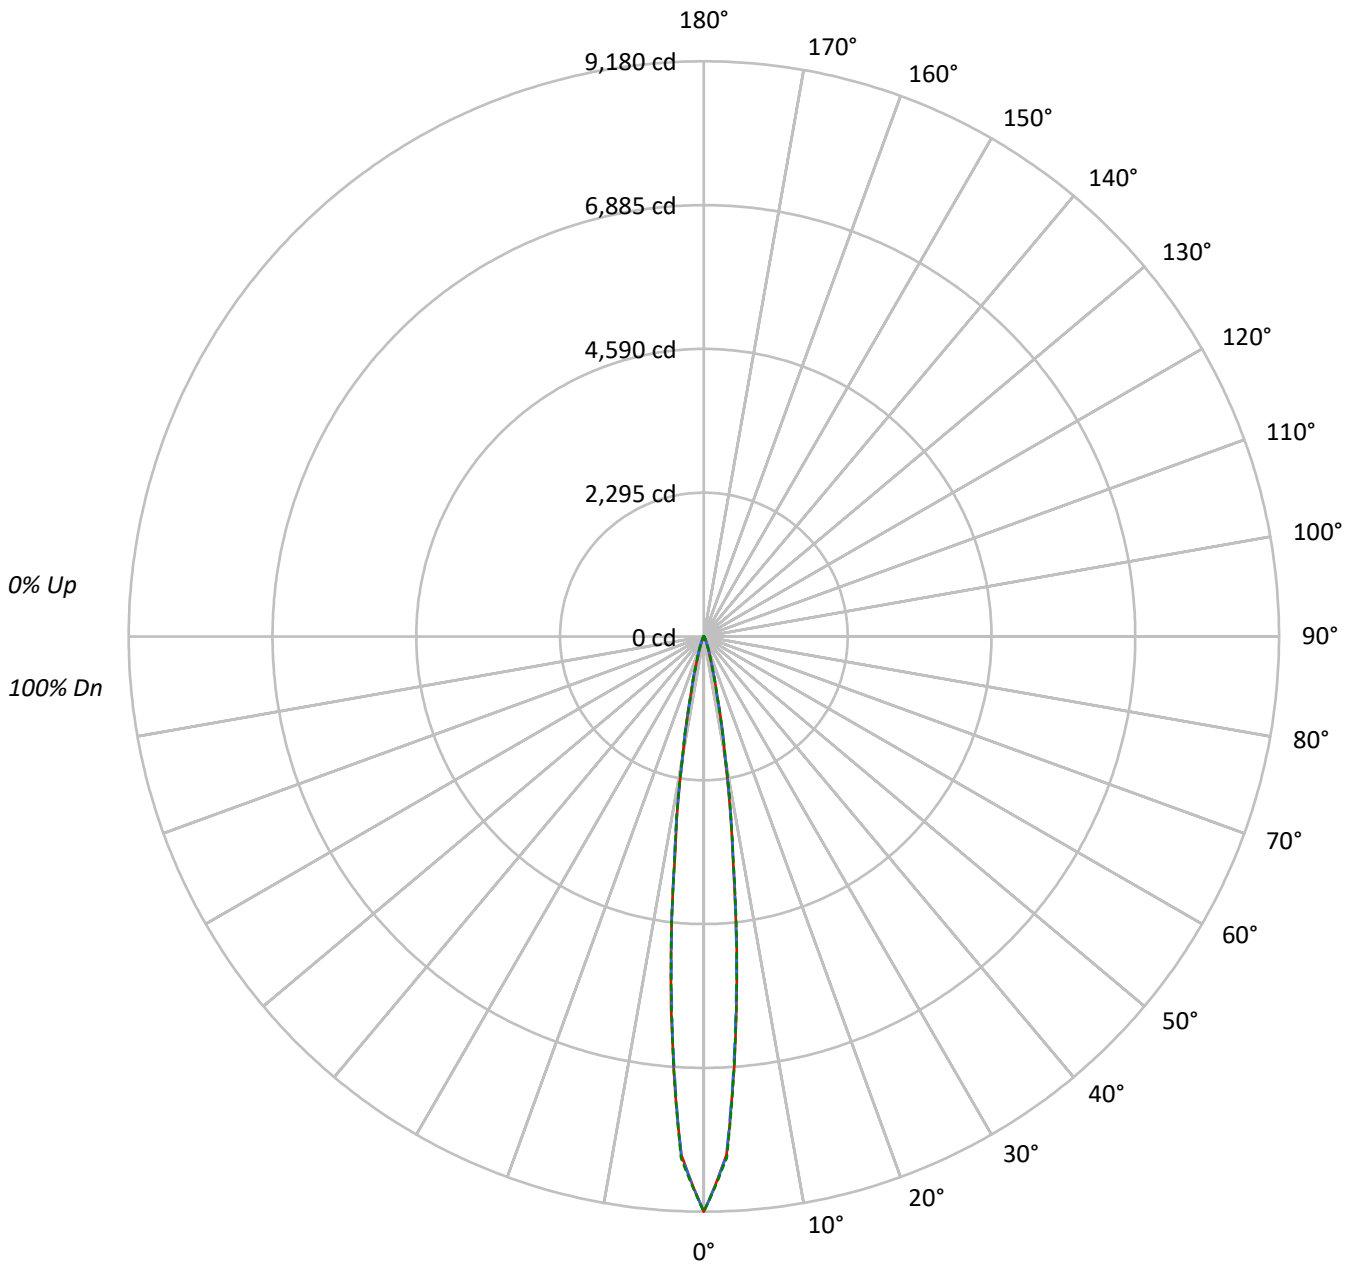



TEST NUMBER: P739866

CATALOG NUMBER: LD4D05D010-EU4DR150210IC9030-4LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98																			
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96																			
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94																			
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93																			
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92																			
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90																			
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89																			
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88																			
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	87	87																			
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1032989	1032989	1032989
5°	607040	599174	603920
10°	181175	182444	185234
15°	45061	45939	44523
20°	13484	15612	13771
25°	4752	6053	4814
30°	1745	2299	1775
35°	871	988	850
40°	554	611	554
45°	406	434	406
50°	327	327	327
55°	271	271	271
60°	218	218	218
65°	164	164	164
70°	139	139	139
75°	91	91	121
80°	63	63	63
85°	33	33	33

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 434 cd/sqm



TEST NUMBER: P739866

CATALOG NUMBER: LD4D05D010-EU4DR150210IC9030-4LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	437.0	64.9
10°-20°	179.8	26.7
20°-30°	35.7	5.3
30°-40°	8.9	1.3
40°-50°	4.7	0.7
50°-60°	3.5	0.5
60°-70°	2.4	0.4
70°-80°	1.4	0.2
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	652.5	96.8
0°-40°	661.4	98.2
0°-60°	669.6	99.4
0°-90°	673.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	673.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	9180	9180	9180	9180	9180	
5°	5973	5912	5896	5936	5942	436
15°	519	529	529	520	513	178
25°	61	69	78	69	62	32
35°	12	13	14	13	12	8
45°	6	6	6	6	6	5
55°	4	4	4	4	4	3
65°	2	2	2	2	2	2
75°	1	1	1	1	2	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P739866

CATALOG NUMBER: LD4D05D010-EU4DR150210IC9030-4LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	9180.5	9180.5	9180.5	9180.5	9180.5
2.5°	8281.2	8288.2	8290.9	8299.1	8329.4
5°	5973.1	5911.7	5895.7	5936.5	5942.4
7.5°	3538.2	3550.6	3596.1	3606.2	3569.7
10°	1941.7	1957.6	1955.3	1969.3	1985.2
12.5°	993.0	980.5	976.7	992.6	970.4
15°	518.8	528.6	528.9	519.6	512.6
17.5°	279.0	290.3	309.0	293.8	270.5
20°	164.8	174.9	190.8	178.4	168.3
22.5°	101.8	110.0	121.3	111.5	103.4
25°	61.0	69.2	77.7	68.8	61.8
27.5°	36.1	43.1	48.6	42.8	35.8
30°	23.3	27.2	30.7	26.8	23.7
32.5°	16.3	17.9	19.4	17.9	16.3
35°	12.0	12.8	13.6	12.8	11.7
37.5°	9.3	10.1	10.5	9.7	8.9
40°	7.8	8.2	8.6	8.2	7.8
42.5°	6.6	7.0	7.0	7.0	6.6
45°	5.8	5.8	6.2	5.8	5.8
47.5°	5.1	5.1	5.4	5.1	5.1
50°	4.7	4.7	4.7	4.7	4.7
52.5°	4.3	4.3	4.3	4.3	4.3
55°	3.9	3.9	3.9	3.9	3.9
57.5°	3.5	3.5	3.5	3.5	3.5
60°	3.1	3.1	3.1	3.1	3.1
62.5°	2.7	2.7	2.7	2.7	2.7
65°	2.3	2.3	2.3	2.3	2.3
67.5°	2.3	2.3	2.3	2.3	2.3
70°	1.9	1.9	1.9	1.9	1.9
72.5°	1.6	1.6	1.6	1.6	1.6
75°	1.2	1.2	1.2	1.2	1.6
77.5°	1.2	1.2	1.2	1.2	1.2
80°	0.8	0.8	0.8	0.8	0.8
82.5°	0.8	0.8	0.8	0.8	0.8
85°	0.4	0.4	0.4	0.4	0.4
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)