

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P739942

Luminaire Tested: LD4D05D010-EU4DR200210IC9030-4LBDP1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P739942
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D05D010-EU4DR200210IC9030-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 577.2 lumens
Efficiency: N/A
Efficacy: 77.0 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P739942
CATALOG NUMBER: LD4D05D010-EU4DR200210IC9030-4LBDP1B

Luminous Intensity Polar Plot

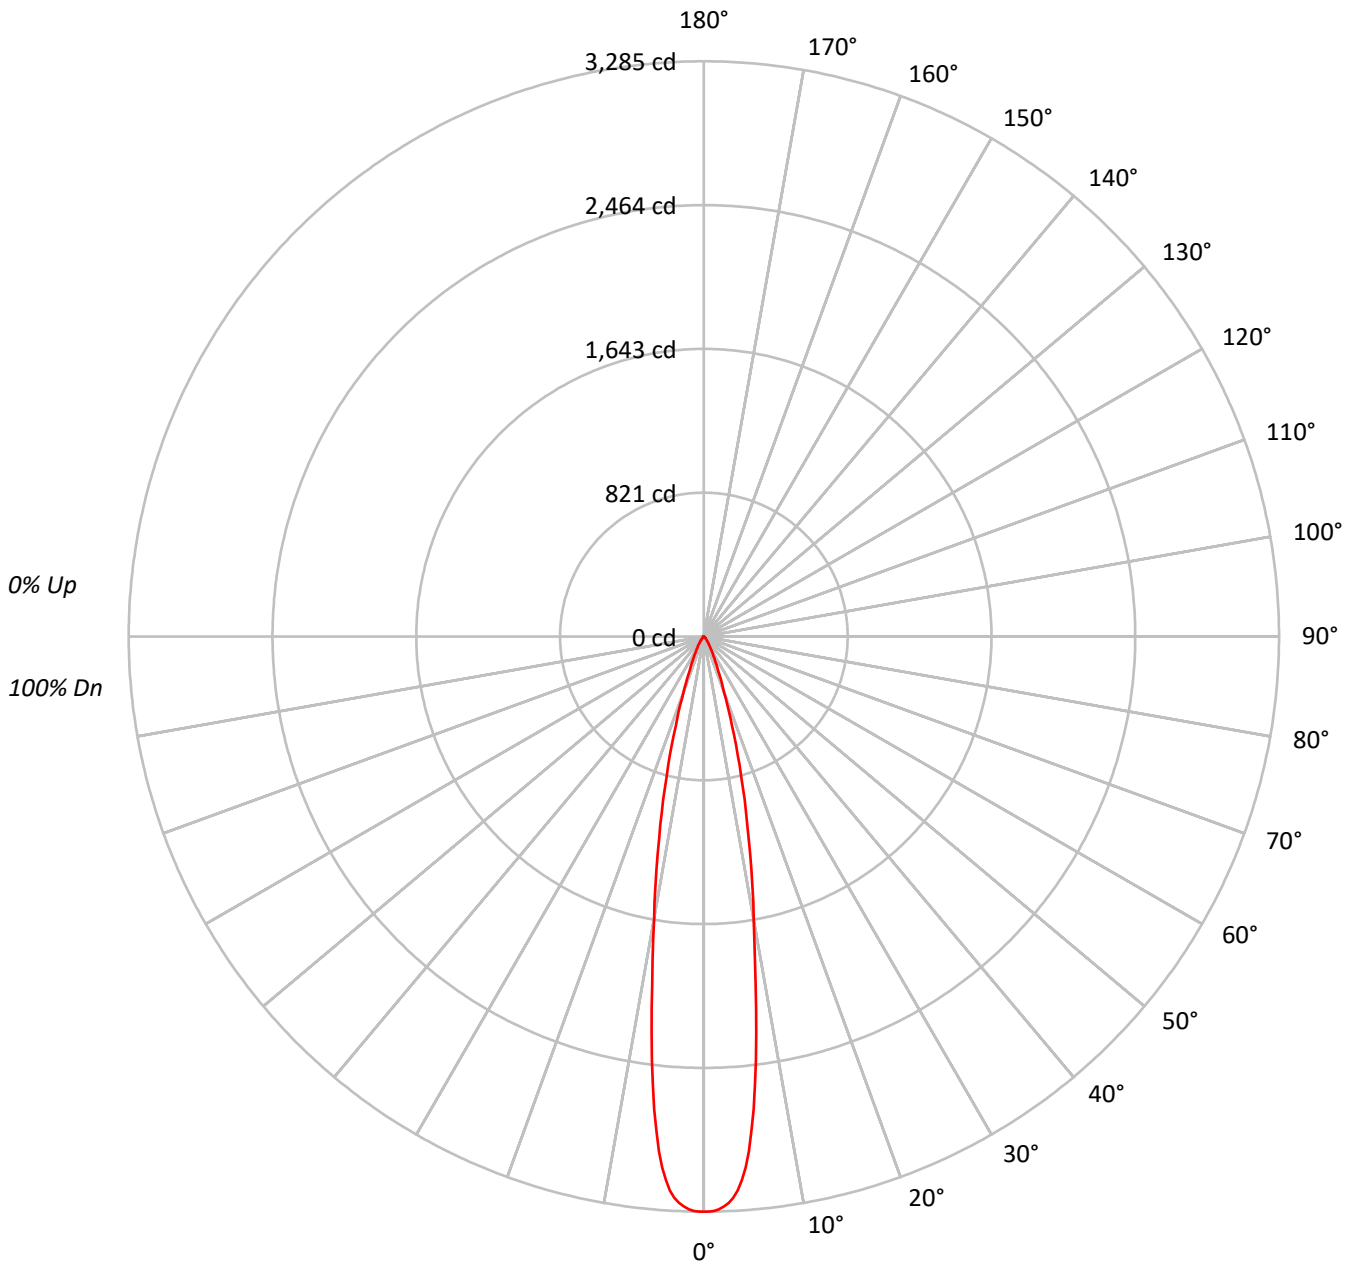



TEST NUMBER: P739942

CATALOG NUMBER: LD4D05D010-EU4DR200210IC9030-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	98	96	95	94															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	98	96	95	94															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	95	93	92	91															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	93	91	89	88															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	91	88	86	85															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	88	86	84	83															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	86	84	82	81															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	84	82	80	79															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	82	80	78	77															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	81	78	76	75															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	358943
5°	323836
10°	181752
15°	92392
20°	39114
25°	18059
30°	9563
35°	5149
40°	2753
45°	1622
50°	952
55°	495
60°	328
65°	233
70°	96
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1622 cd/sqm



TEST NUMBER: P739942

CATALOG NUMBER: LD4D05D010-EU4DR200210IC9030-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	233.9	40.5
10°-20°	230.3	39.9
20°-30°	75.2	13.0
30°-40°	25.6	4.4
40°-50°	8.6	1.5
50°-60°	2.6	0.4
60°-70°	0.9	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	539.5	93.5
0°-40°	565.1	97.9
0°-60°	576.3	99.8
0°-90°	577.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	577.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3285	
5°	2953	234
15°	817	230
25°	150	75
35°	39	26
45°	10	9
55°	3	3
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P739942

CATALOG NUMBER: LD4D05D010-EU4DR200210IC9030-4LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	3285.2
0.5°	3285.2
1°	3281.1
1.5°	3272.9
2°	3258.0
2.5°	3238.1
3°	3210.0
3.5°	3170.8
4°	3112.6
4.5°	3041.8
5°	2952.6
5.5°	2835.3
6°	2715.0
6.5°	2577.2
7°	2442.4
7.5°	2284.4
8°	2143.4
8.5°	2001.5
9°	1870.5
9.5°	1750.2
10°	1638.2
12.5°	1176.3
15°	816.8
17.5°	533.6
20°	336.4
22.5°	217.9
25°	149.8
27.5°	105.3
30°	75.8
32.5°	54.4
35°	38.6
37.5°	26.9
40°	19.3
42.5°	14.0
45°	10.5
47.5°	8.2
50°	5.6
52.5°	3.5
55°	2.6
57.5°	2.0
60°	1.5
62.5°	1.2
65°	0.9



TEST NUMBER: P739942

CATALOG NUMBER: LD4D05D010-EU4DR200210IC9030-4LBDP1B

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





67.5°		0.6
70°		0.3

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)