

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740127

Luminaire Tested: LD4D05D010-EU4DR300210IC9040-4LBDP1MW

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P740127  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D05D010-EU4DR300210IC9040-4LBDP1MW  
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 30° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 600.5 lumens  
Efficiency: N/A  
Efficacy: 80.1 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49  
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P740127  
CATALOG NUMBER: LD4D05D010-EU4DR300210IC9040-4LBDP1MW

### Luminous Intensity Polar Plot

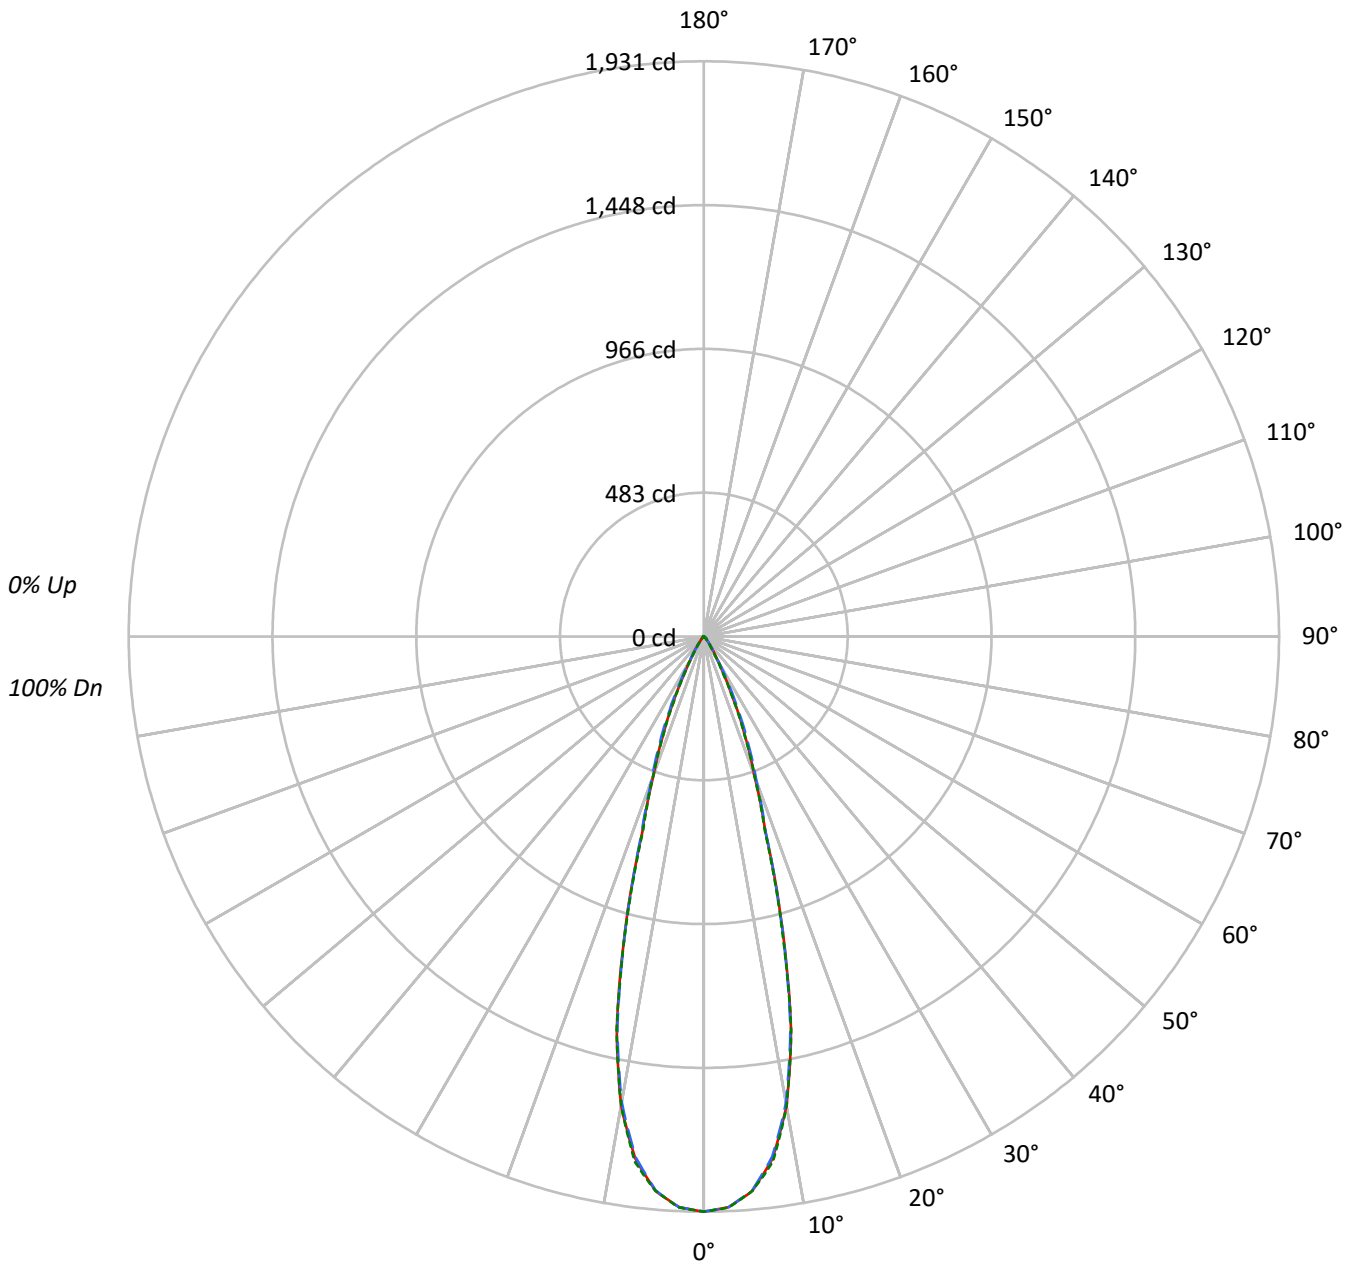



TEST NUMBER: P740127

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9040-4LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96						96													
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92						92													
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89						89													
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85						85													
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82						82													
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79						79													
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77						77													
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74						74													
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72						72													
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69						69													

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	147790	147790	147790
5°	143552	143383	143560
10°	124335	123457	124304
15°	81122	80686	80282
20°	40337	41852	40288
25°	20320	22913	19906
30°	8140	8865	7088
35°	3775	3616	3028
40°	1629	1809	1539
45°	1147	1429	1158
50°	393	1036	417
55°	227	427	240
60°	153	199	153
65°	109	109	109
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°  
 Vertical Angle: 45°  
 Luminance: 1429 cd/sqm



TEST NUMBER: P740127

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9040-4LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	169.8	28.3
10°-20°	273.4	45.5
20°-30°	118.2	19.7
30°-40°	26.9	4.5
40°-50°	9.2	1.5
50°-60°	2.2	0.4
60°-70°	0.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	561.4	93.5
0°-40°	588.3	98.0
0°-60°	599.8	99.9
0°-90°	600.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	600.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1931	1931	1931	1931	1931	
5°	1868	1866	1866	1870	1868	170
15°	1024	1011	1018	1015	1013	274
25°	241	250	271	243	236	115
35°	40	41	39	38	32	27
45°	11	13	13	13	11	8
55°	2	2	3	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P740127

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9040-4LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1930.8	1930.8	1930.8	1930.8	1930.8
2.5°	1918.1	1916.7	1917.5	1918.4	1918.8
5°	1868.3	1866.5	1866.1	1870.0	1868.4
7.5°	1767.9	1765.3	1761.4	1770.2	1778.5
10°	1599.7	1596.9	1588.4	1592.6	1599.3
12.5°	1351.4	1342.3	1342.1	1355.3	1353.5
15°	1023.7	1011.4	1018.2	1014.9	1013.1
17.5°	688.4	683.7	692.8	690.1	678.2
20°	495.2	496.5	513.8	505.1	494.6
22.5°	361.4	365.8	386.4	363.9	355.7
25°	240.6	249.7	271.3	243.3	235.7
27.5°	148.0	152.2	174.1	146.1	141.9
30°	92.1	90.0	100.3	86.1	80.2
32.5°	60.4	57.8	61.1	54.8	50.1
35°	40.4	41.3	38.7	38.4	32.4
37.5°	25.2	29.0	25.6	27.3	20.9
40°	16.3	21.0	18.1	20.0	15.4
42.5°	13.3	16.2	14.9	15.8	13.6
45°	10.6	13.2	13.2	13.2	10.7
47.5°	5.9	8.8	11.3	9.0	6.2
50°	3.3	4.5	8.7	4.6	3.5
52.5°	2.3	2.6	6.0	2.6	2.3
55°	1.7	1.8	3.2	1.9	1.8
57.5°	1.3	1.4	1.7	1.4	1.3
60°	1.0	1.0	1.3	1.1	1.0
62.5°	0.7	0.7	0.9	0.7	0.7
65°	0.6	0.6	0.6	0.6	0.6
67.5°	0.3	0.4	0.4	0.4	0.4
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)