

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P739903

Luminaire Tested: LD4D05D010-EU4DR150210IC9050-4LBDP1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P739903
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D05D010-EU4DR150210IC9050-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 15° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 642.9 lumens
Efficiency: N/A
Efficacy: 85.7 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P739903
CATALOG NUMBER: LD4D05D010-EU4DR150210IC9050-4LBDP1B

Luminous Intensity Polar Plot

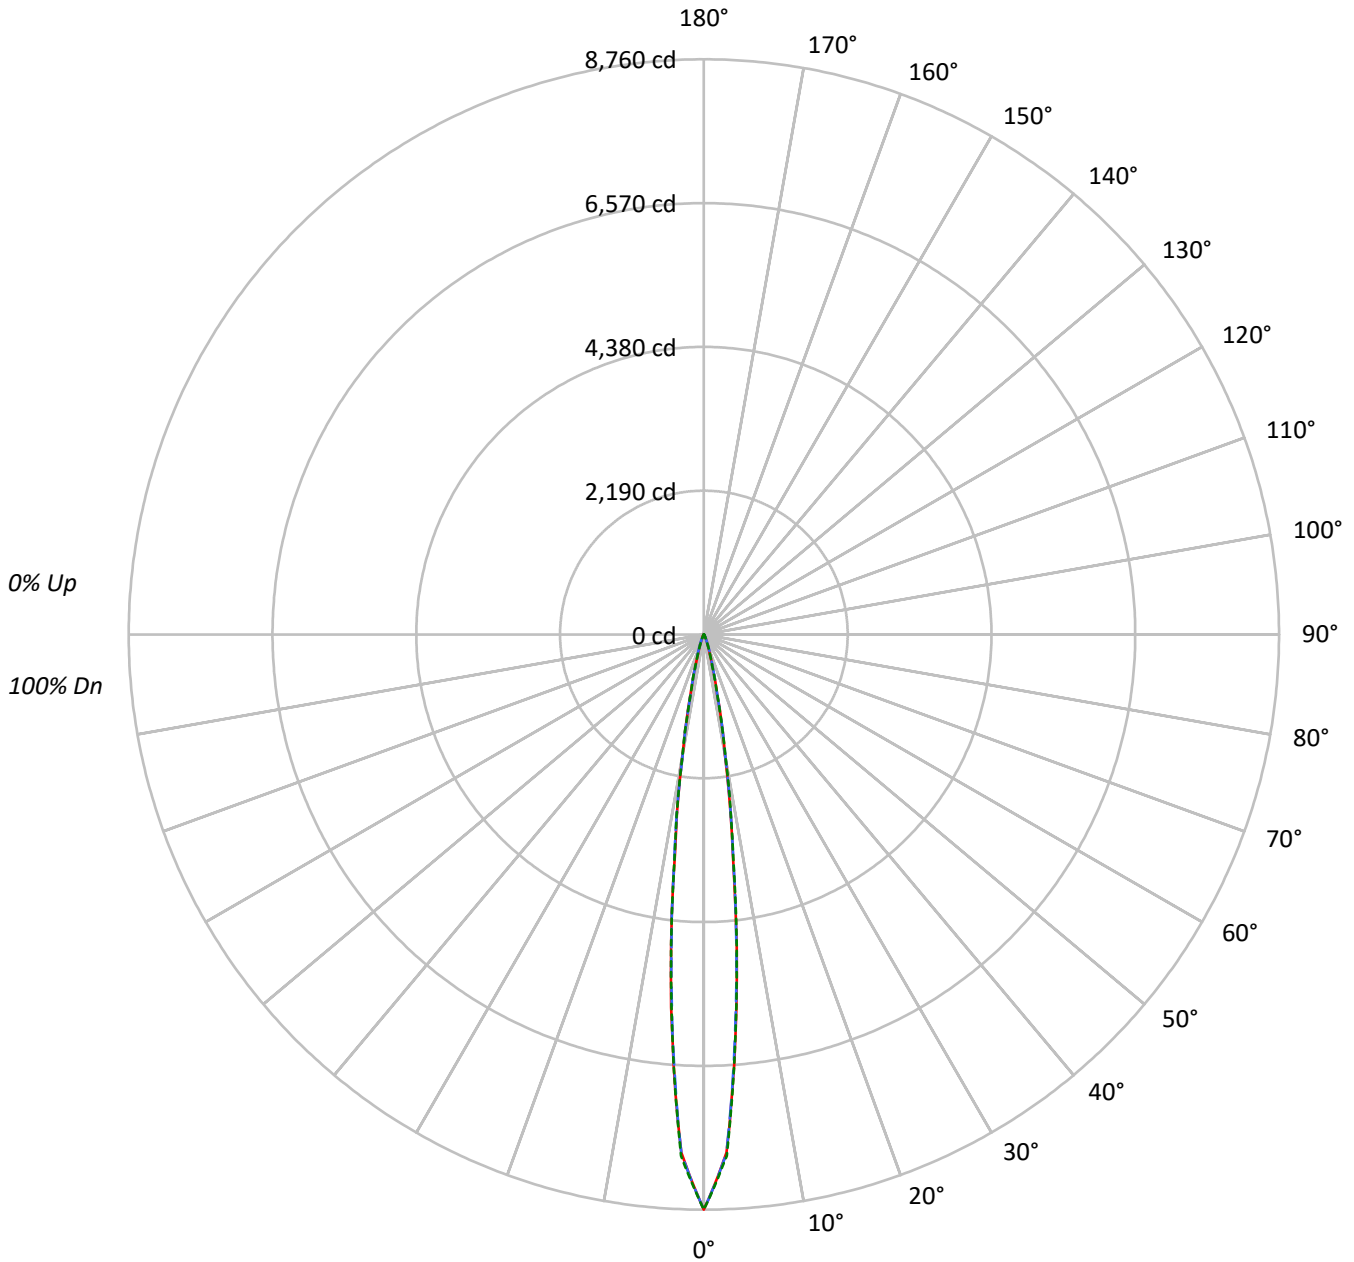



TEST NUMBER: P739903

CATALOG NUMBER: LD4D05D010-EU4DR150210IC9050-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98																			
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96																			
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94																			
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93																			
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92																			
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90																			
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89																			
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88																			
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87																			
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	985641	985641	985641
5°	579214	571713	576236
10°	172871	174075	176743
15°	43003	43837	42482
20°	12863	14900	13141
25°	4534	5780	4596
30°	1662	2194	1692
35°	835	944	806
40°	526	582	526
45°	392	413	392
50°	306	306	306
55°	258	258	258
60°	211	211	211
65°	157	157	157
70°	139	139	139
75°	83	83	113
80°	55	55	55
85°	33	33	33

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 413 cd/sqm



TEST NUMBER: P739903

CATALOG NUMBER: LD4D05D010-EU4DR150210IC9050-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	417.0	64.9
10°-20°	171.5	26.7
20°-30°	34.1	5.3
30°-40°	8.5	1.3
40°-50°	4.5	0.7
50°-60°	3.3	0.5
60°-70°	2.3	0.4
70°-80°	1.3	0.2
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	622.6	96.8
0°-40°	631.1	98.2
0°-60°	638.8	99.4
0°-90°	642.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	642.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	8760	8760	8760	8760	8760	
5°	5699	5641	5626	5664	5670	416
15°	495	504	505	496	489	170
25°	58	66	74	66	59	31
35°	12	12	13	12	11	8
45°	6	6	6	6	6	4
55°	4	4	4	4	4	3
65°	2	2	2	2	2	2
75°	1	1	1	1	2	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P739903

CATALOG NUMBER: LD4D05D010-EU4DR150210IC9050-4LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	8759.7	8759.7	8759.7	8759.7	8759.7
2.5°	7901.6	7908.3	7910.9	7918.7	7947.6
5°	5699.3	5640.7	5625.5	5664.4	5670.0
7.5°	3376.0	3387.9	3431.3	3440.9	3406.1
10°	1852.7	1867.9	1865.6	1879.0	1894.2
12.5°	947.5	935.6	931.9	947.1	926.0
15°	495.1	504.3	504.7	495.8	489.1
17.5°	266.3	277.0	294.8	280.3	258.1
20°	157.2	166.9	182.1	170.2	160.6
22.5°	97.2	104.9	115.7	106.4	98.6
25°	58.2	66.0	74.2	65.6	59.0
27.5°	34.5	41.2	46.4	40.8	34.1
30°	22.2	26.0	29.3	25.6	22.6
32.5°	15.6	17.1	18.5	17.1	15.6
35°	11.5	12.2	13.0	12.2	11.1
37.5°	8.9	9.6	10.0	9.3	8.5
40°	7.4	7.8	8.2	7.8	7.4
42.5°	6.3	6.7	6.7	6.7	6.3
45°	5.6	5.6	5.9	5.6	5.6
47.5°	4.8	4.8	5.2	4.8	4.8
50°	4.4	4.4	4.4	4.4	4.4
52.5°	4.1	4.1	4.1	4.1	4.1
55°	3.7	3.7	3.7	3.7	3.7
57.5°	3.3	3.3	3.3	3.3	3.3
60°	3.0	3.0	3.0	3.0	3.0
62.5°	2.6	2.6	2.6	2.6	2.6
65°	2.2	2.2	2.2	2.2	2.2
67.5°	2.2	2.2	2.2	2.2	2.2
70°	1.9	1.9	1.9	1.9	1.9
72.5°	1.5	1.5	1.5	1.5	1.5
75°	1.1	1.1	1.1	1.1	1.5
77.5°	1.1	1.1	1.1	1.1	1.1
80°	0.7	0.7	0.7	0.7	0.7
82.5°	0.7	0.7	0.7	0.7	0.7
85°	0.4	0.4	0.4	0.4	0.4
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)