

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740137

Luminaire Tested: LD4D05D010-EU4DR300210IC9050-4LBDP1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P740137
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D05D010-EU4DR300210IC9050-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 535.5 lumens
Efficiency: N/A
Efficacy: 71.4 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P740137
CATALOG NUMBER: LD4D05D010-EU4DR300210IC9050-4LBDP1B

Luminous Intensity Polar Plot

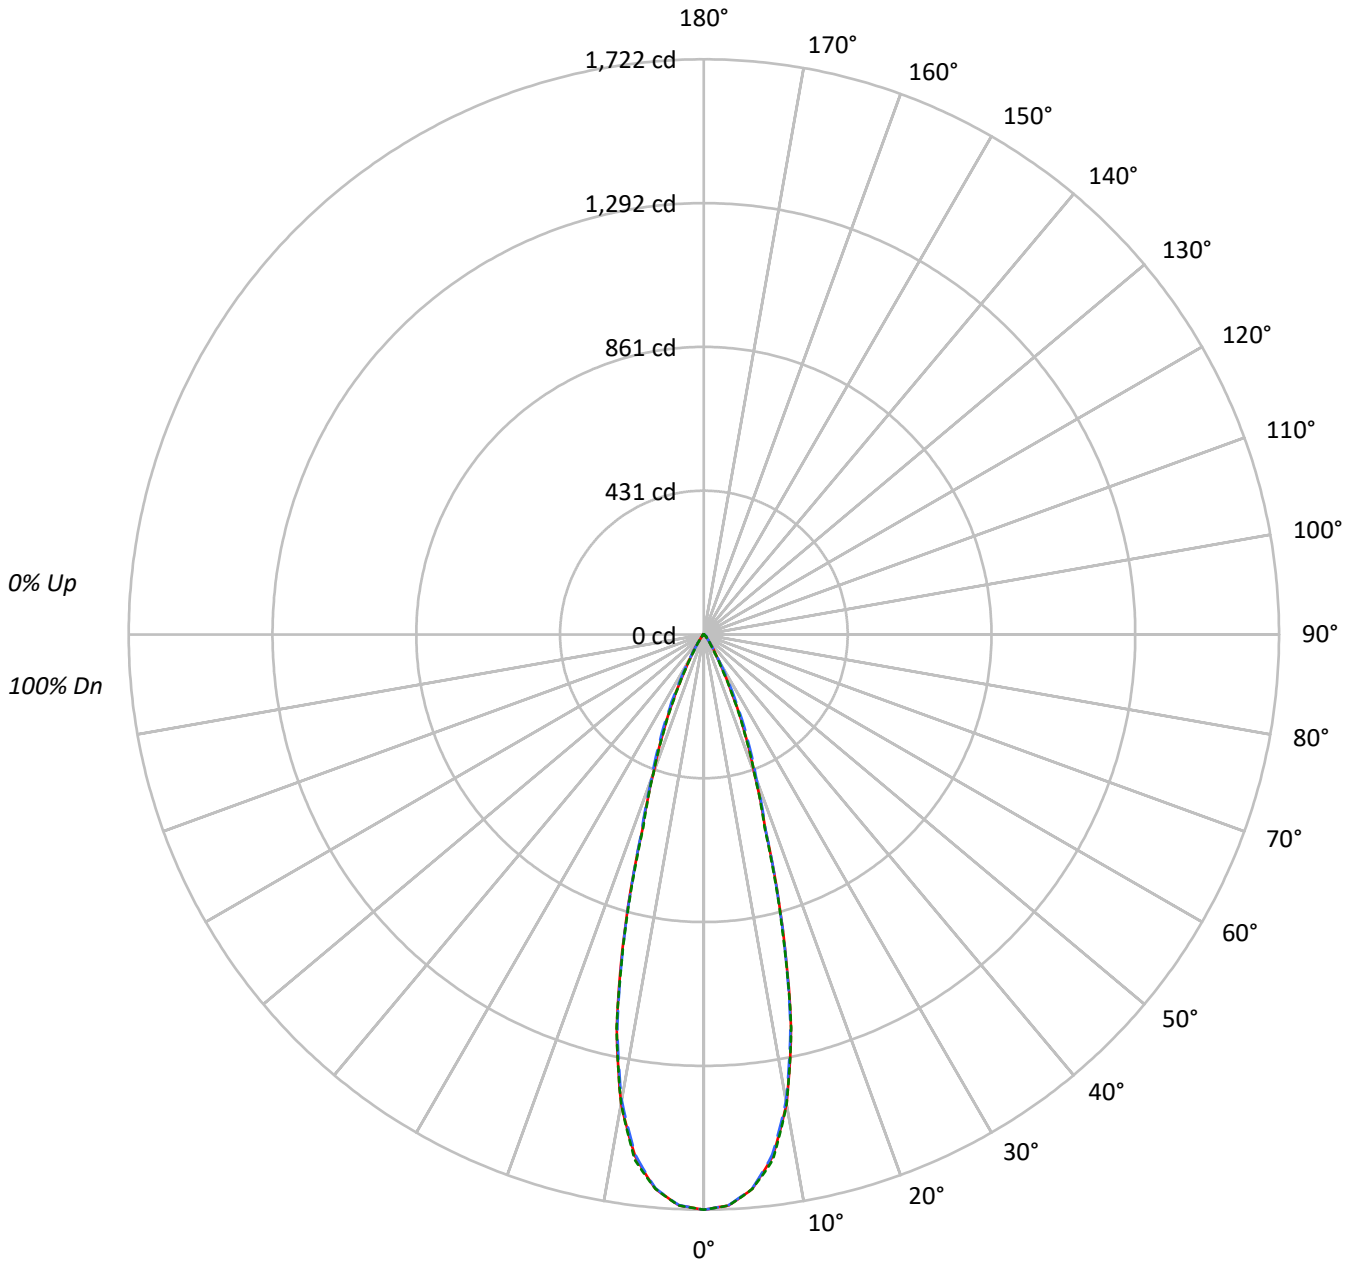



TEST NUMBER: P740137

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9050-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	87	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	131815	131815	131815
5°	128031	127878	128039
10°	110897	110112	110866
15°	72357	71961	71597
20°	35979	37323	35930
25°	18124	20438	17753
30°	7256	7902	6320
35°	3364	3224	2700
40°	1459	1619	1369
45°	1028	1267	1039
50°	357	929	381
55°	200	387	214
60°	138	168	138
65°	91	91	91
70°	45	45	45
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 1267 cd/sqm



TEST NUMBER: P740137

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9050-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	151.4	28.3
10°-20°	243.9	45.5
20°-30°	105.4	19.7
30°-40°	24.0	4.5
40°-50°	8.2	1.5
50°-60°	2.0	0.4
60°-70°	0.5	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	500.7	93.5
0°-40°	524.7	98.0
0°-60°	535.0	99.9
0°-90°	535.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	535.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1722	1722	1722	1722	1722	
5°	1666	1665	1664	1668	1666	152
15°	913	902	908	905	904	244
25°	215	223	242	217	210	103
35°	36	37	34	34	29	24
45°	10	12	12	12	10	7
55°	2	2	3	2	2	1
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P740137

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9050-4LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1722.1	1722.1	1722.1	1722.1	1722.1
2.5°	1710.7	1709.5	1710.1	1711.0	1711.3
5°	1666.3	1664.7	1664.3	1667.8	1666.4
7.5°	1576.8	1574.5	1571.0	1578.8	1586.2
10°	1426.8	1424.2	1416.7	1420.4	1426.4
12.5°	1205.3	1197.1	1197.0	1208.8	1207.2
15°	913.1	902.1	908.1	905.1	903.5
17.5°	614.0	609.7	617.9	615.4	604.9
20°	441.7	442.8	458.2	450.5	441.1
22.5°	322.3	326.3	344.6	324.6	317.2
25°	214.6	222.7	242.0	217.0	210.2
27.5°	132.0	135.7	155.2	130.3	126.6
30°	82.1	80.2	89.4	76.8	71.5
32.5°	53.9	51.5	54.4	48.9	44.6
35°	36.0	36.8	34.5	34.3	28.9
37.5°	22.5	25.9	22.8	24.4	18.6
40°	14.6	18.8	16.2	17.8	13.7
42.5°	11.9	14.4	13.3	14.1	12.1
45°	9.5	11.7	11.7	11.7	9.6
47.5°	5.2	7.8	10.1	8.0	5.6
50°	3.0	4.0	7.8	4.1	3.2
52.5°	2.0	2.3	5.3	2.3	2.1
55°	1.5	1.6	2.9	1.7	1.6
57.5°	1.2	1.3	1.5	1.3	1.2
60°	0.9	0.9	1.1	1.0	0.9
62.5°	0.7	0.7	0.7	0.7	0.7
65°	0.5	0.5	0.5	0.5	0.5
67.5°	0.2	0.3	0.3	0.3	0.3
70°	0.2	0.2	0.2	0.2	0.2
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)