

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740764

Luminaire Tested: LD4D05D010-EU4DR700210IC9050-4LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P740764
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D05D010-EU4DR700210IC9050-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 537.2 lumens
Efficiency: N/A
Efficacy: 71.6 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P740764

CATALOG NUMBER: LD4D05D010-EU4DR700210IC9050-4LBDP1MW

Luminous Intensity Polar Plot

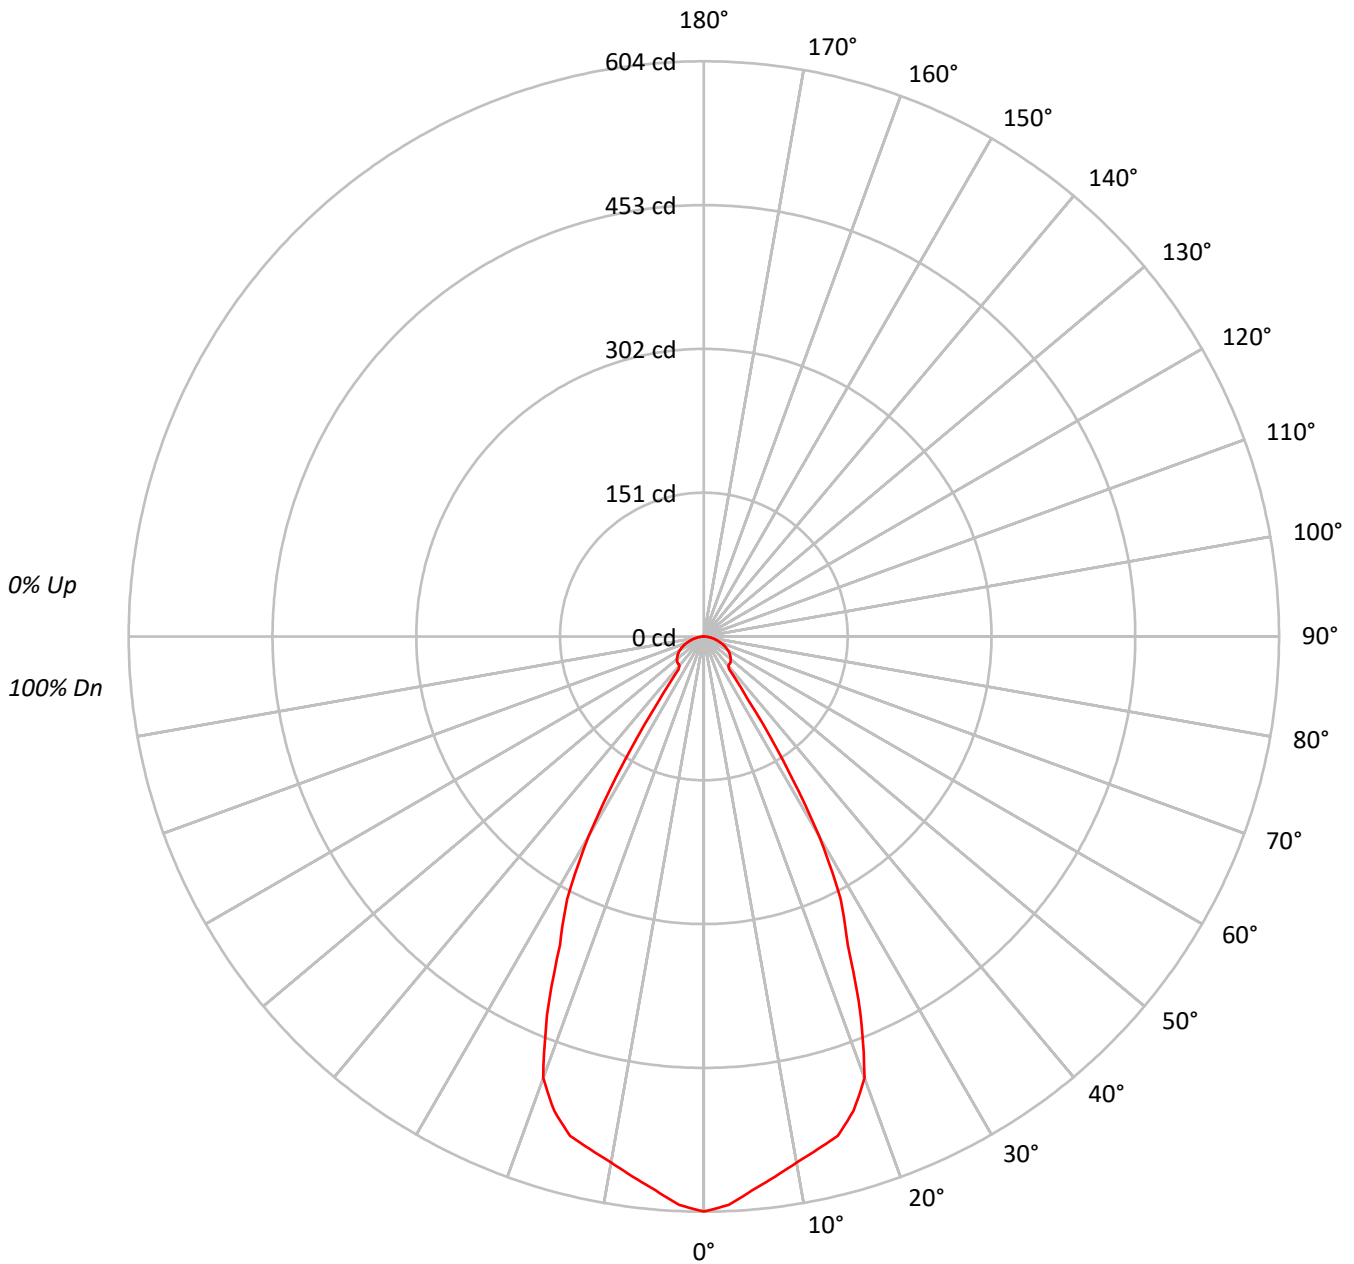



TEST NUMBER: P740764

CATALOG NUMBER: LD4D05D010-EU4DR700210IC9050-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	65972
5°	64019
10°	62230
15°	61410
20°	57357
25°	43075
30°	30456
35°	10791
40°	5677
45°	6042
50°	6255
55°	6381
60°	6403
65°	6282
70°	5942
75°	5488
80°	4845
85°	4012

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 57.5°
 Luminance: 6426 cd/sqm



TEST NUMBER: P740764

CATALOG NUMBER: LD4D05D010-EU4DR700210IC9050-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	55.1	10.2
10°-20°	151.0	28.1
20°-30°	166.3	31.0
30°-40°	63.6	11.8
40°-50°	30.0	5.6
50°-60°	29.8	5.6
60°-70°	23.9	4.4
70°-80°	13.8	2.6
80°-90°	3.7	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	372.4	69.3
0°-40°	435.9	81.2
0°-60°	495.8	92.3
0°-90°	537.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	537.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	604	
5°	584	55
15°	543	151
25°	357	166
35°	81	64
45°	39	30
55°	34	30
65°	24	24
75°	13	14
85°	3	4
90°	0	



TEST NUMBER: P740764

CATALOG NUMBER: LD4D05D010-EU4DR700210IC9050-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	603.8
2.5°	597.5
5°	583.7
7.5°	572.1
10°	560.9
12.5°	551.5
15°	542.9
17.5°	522.4
20°	493.3
22.5°	430.3
25°	357.3
27.5°	311.1
30°	241.4
32.5°	156.0
35°	80.9
37.5°	43.7
40°	39.8
42.5°	39.5
45°	39.1
47.5°	38.2
50°	36.8
52.5°	35.2
55°	33.5
57.5°	31.6
60°	29.3
62.5°	26.9
65°	24.3
67.5°	21.4
70°	18.6
72.5°	15.7
75°	13.0
77.5°	10.3
80°	7.7
82.5°	5.4
85°	3.2
87.5°	1.3
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)