

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P749038

Luminaire Tested: LD4D50D010-EU4DR2540509030-4LBDP1LI

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P749038  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D50D010-EU4DR2540509030-4LBDP1LI  
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 25° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4540.3 lumens  
Efficiency: N/A  
Efficacy: 96.6 lumens/watt  
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.45  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 47  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P749038  
CATALOG NUMBER: LD4D50D010-EU4DR2540509030-4LBDP1LI

### Luminous Intensity Polar Plot

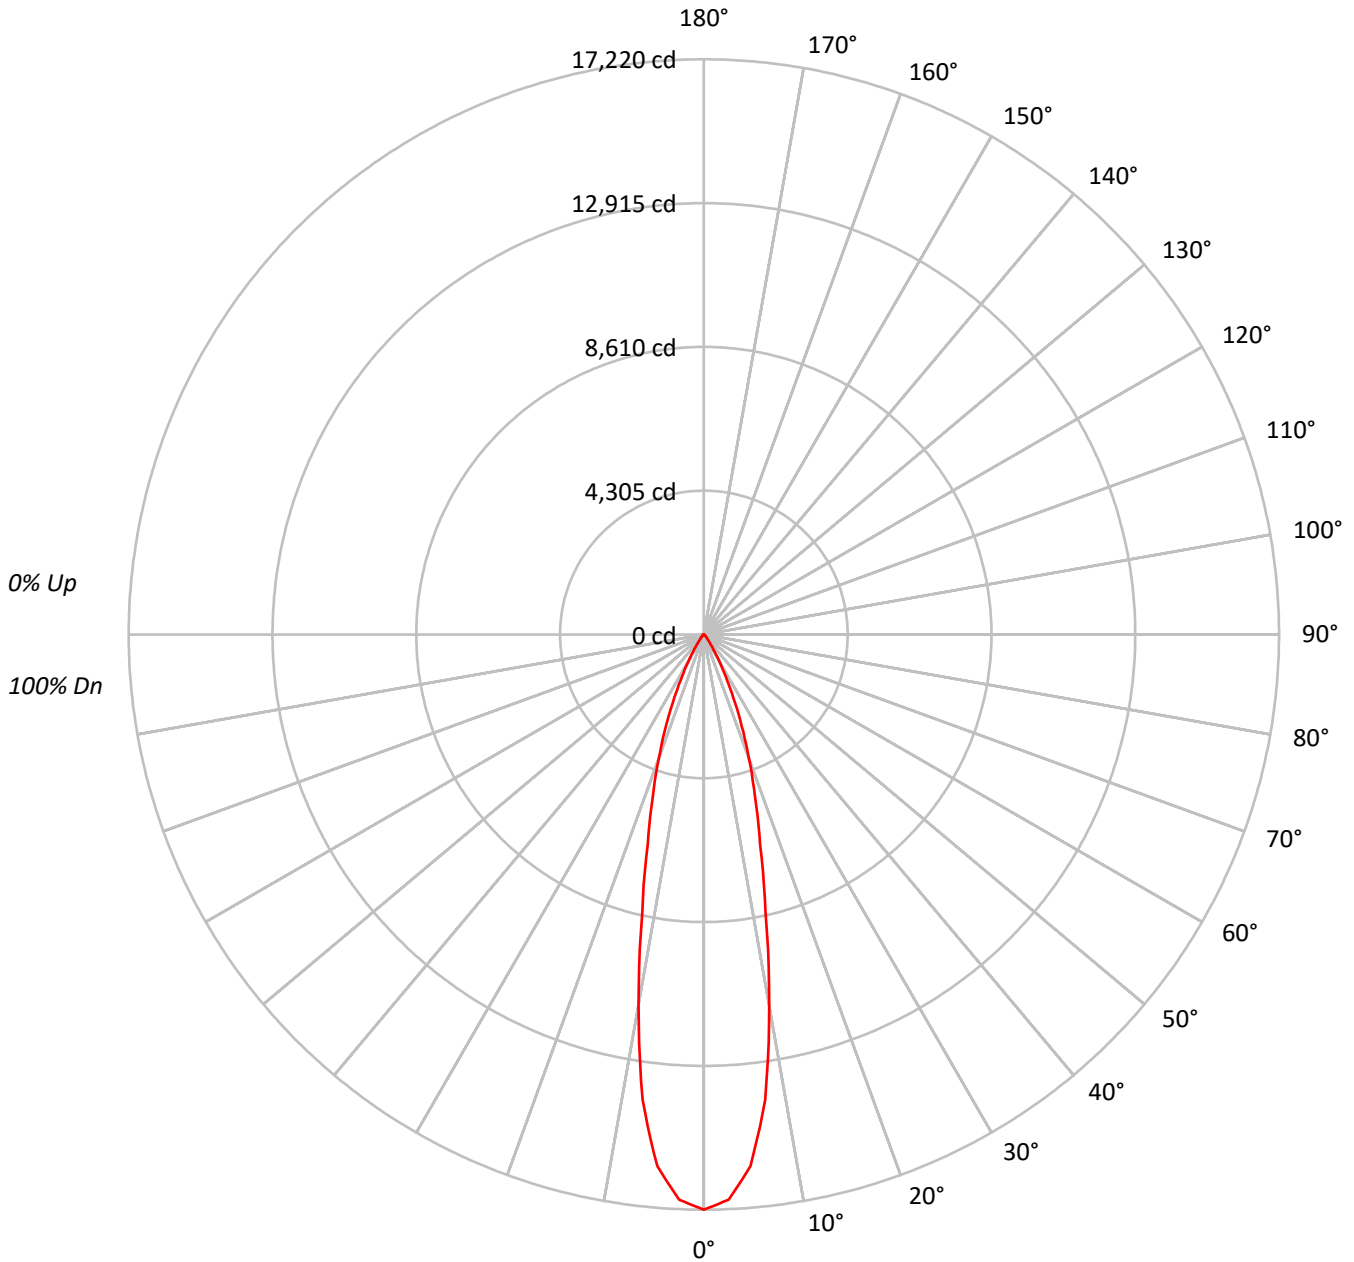



TEST NUMBER: P749038

CATALOG NUMBER: LD4D50D010-EU4DR2540509030-4LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89
4	103	97	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85
5	100	93	89	86	98	93	89	86	91	87	85	89	86	84	88	85	83	82
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79
7	93	87	82	79	92	86	82	79	85	81	78	84	80	78	83	80	78	77
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1881525
5°	1752404
10°	1250032
15°	736221
20°	458092
25°	251395
30°	114973
35°	43536
40°	19726
45°	11852
50°	4929
55°	3162
60°	2207
65°	1499
70°	224
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 11852 cd/sqm



TEST NUMBER: P749038  
 CATALOG NUMBER: LD4D50D010-EU4DR2540509030-4LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1373.1	30.2
10°-20°	1859.8	41.0
20°-30°	984.2	21.7
30°-40°	242.9	5.4
40°-50°	59.3	1.3
50°-60°	15.6	0.3
60°-70°	5.2	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4217.2	92.9
0°-40°	4460.1	98.2
0°-60°	4535.0	99.9
0°-90°	4540.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4540.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	17220	
5°	15978	###
15°	6509	1860
25°	2085	984
35°	326	243
45°	77	59
55°	17	16
65°	6	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P749038  
CATALOG NUMBER: LD4D50D010-EU4DR2540509030-4LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	17220.5
2.5°	16937.4
5°	15977.7
7.5°	14049.4
10°	11267.0
12.5°	8517.2
15°	6508.6
17.5°	5072.5
20°	3939.8
22.5°	2954.6
25°	2085.3
27.5°	1398.4
30°	911.3
32.5°	554.4
35°	326.4
37.5°	199.8
40°	138.3
42.5°	105.7
45°	76.7
47.5°	46.3
50°	29.0
52.5°	21.0
55°	16.6
57.5°	13.0
60°	10.1
62.5°	8.0
65°	5.8
67.5°	2.2
70°	0.7
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)