

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P749440

Luminaire Tested: LD4D50D010-EU4DR5040509035-4LBDP1H

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P749440
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D50D010-EU4DR5040509035-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5073.2 lumens
Efficiency: N/A
Efficacy: 107.9 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 47
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P749440
CATALOG NUMBER: LD4D50D010-EU4DR5040509035-4LBDP1H

Luminous Intensity Polar Plot

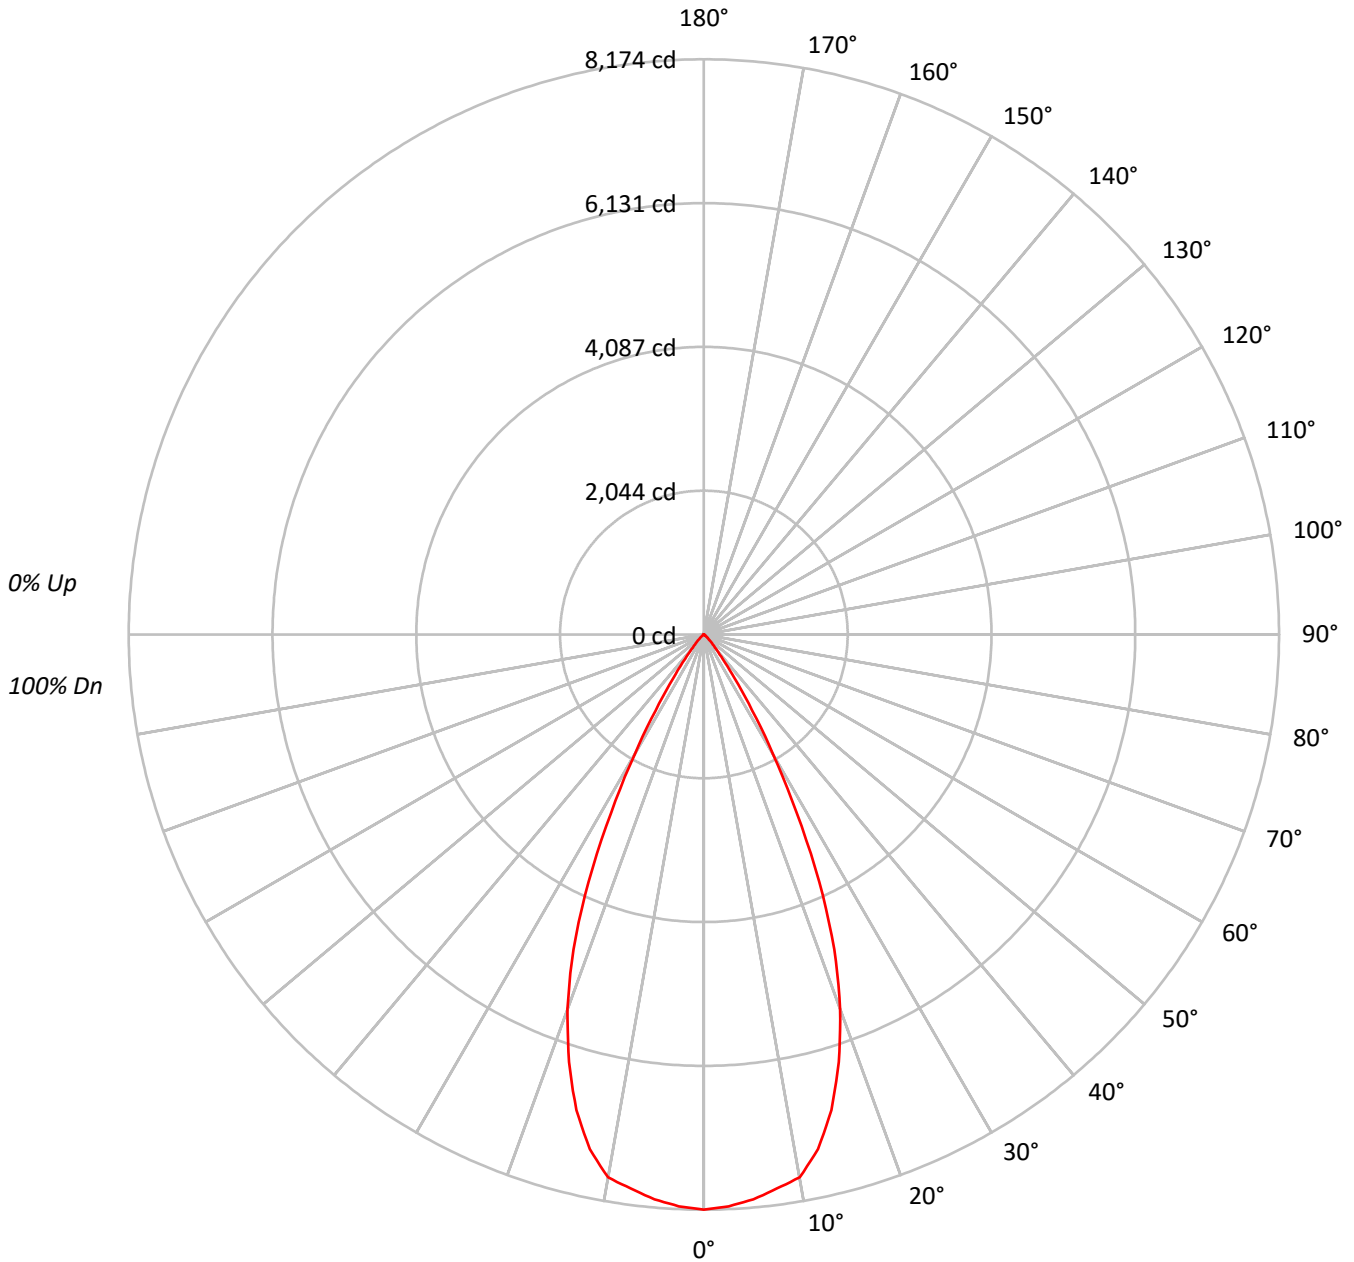



TEST NUMBER: P749440

CATALOG NUMBER: LD4D50D010-EU4DR5040509035-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	112	109	107	112	110	108	106	106	104	102		102	101	99		98	97	97	95
2	109	105	101	98	107	103	100	97	100	98	95		97	95	93		95	93	91	90
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91	88	86	85
4	100	94	89	85	99	93	88	85	90	87	84		89	85	83		87	84	82	80
5	96	89	84	80	95	88	83	79	86	82	79		85	81	78		83	80	77	76
6	92	84	79	75	91	83	79	75	82	78	74		81	77	74		79	76	74	72
7	88	80	75	71	87	79	74	71	78	74	71		77	73	70		76	73	70	69
8	85	76	71	67	84	76	71	67	75	70	67		74	70	67		73	69	66	65
9	81	73	68	64	80	72	67	64	71	67	64		71	67	64		70	66	63	62
10	78	70	64	61	77	69	64	61	68	64	61		68	64	61		67	63	60	59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	893108
5°	883753
10°	869198
15°	791477
20°	658593
25°	467504
30°	247457
35°	100837
40°	37455
45°	17152
50°	7020
55°	3676
60°	1814
65°	543
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17152 cd/sqm



TEST NUMBER: P749440

CATALOG NUMBER: LD4D50D010-EU4DR5040509035-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	761.6	15.0
10°-20°	1924.8	37.9
20°-30°	1728.9	34.1
30°-40°	541.3	10.7
40°-50°	94.8	1.9
50°-60°	18.9	0.4
60°-70°	2.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4415.3	87.0
0°-40°	4956.6	97.7
0°-60°	5070.3	99.9
0°-90°	5073.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5073.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8174	
5°	8058	762
15°	6997	1925
25°	3878	1729
35°	756	541
45°	111	95
55°	19	19
65°	2	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P749440
CATALOG NUMBER: LD4D50D010-EU4DR5040509035-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	8174.1
2.5°	8133.5
5°	8057.7
7.5°	7941.9
10°	7834.4
12.5°	7489.8
15°	6997.1
17.5°	6371.3
20°	5664.2
22.5°	4846.2
25°	3877.9
27.5°	2851.1
30°	1961.4
32.5°	1277.0
35°	756.0
37.5°	434.2
40°	262.6
42.5°	170.9
45°	111.0
47.5°	67.5
50°	41.3
52.5°	28.3
55°	19.3
57.5°	13.1
60°	8.3
62.5°	4.8
65°	2.1
67.5°	0.7
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)