

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P749310

Luminaire Tested: LD4D50D010-EU4DR4040509050-4LBDP1H

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P749310
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D50D010-EU4DR4040509050-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 40° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5382.1 lumens
Efficiency: N/A
Efficacy: 114.5 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 47
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P749310
CATALOG NUMBER: LD4D50D010-EU4DR4040509050-4LBDP1H

Luminous Intensity Polar Plot

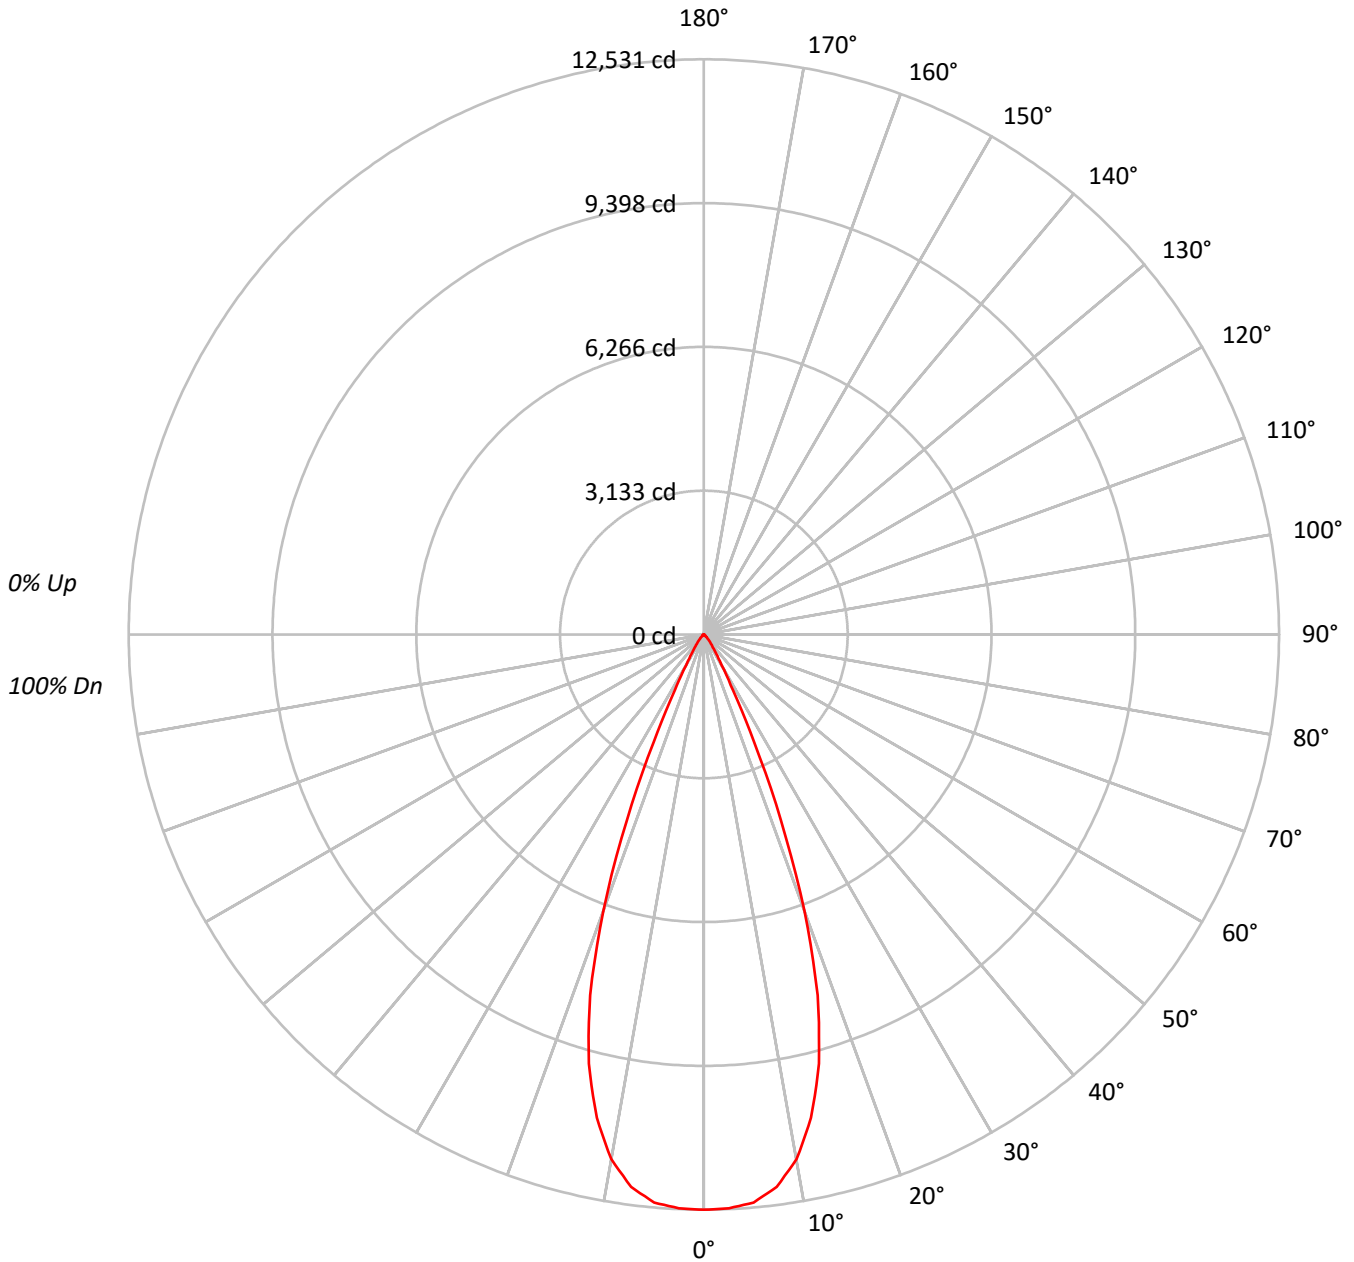



TEST NUMBER: P749310

CATALOG NUMBER: LD4D50D010-EU4DR4040509050-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	97	96			96
2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92			92
3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88			88
4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84			84
5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81			81
6	95	88	84	80	94	88	83	80	86	82	80	85	82	79	84	81	79	77			77
7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	74			74
8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72			72
9	86	79	74	71	85	78	74	71	77	73	71	76	73	70	76	72	70	69			69
10	83	76	71	68	82	75	71	68	75	71	68	74	70	68	73	70	68	67			67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1369157
5°	1362509
10°	1287864
15°	1094852
20°	746216
25°	311348
30°	97903
35°	45497
40°	25160
45°	11542
50°	5592
55°	3067
60°	1595
65°	569
70°	224
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 11542 cd/sqm



TEST NUMBER: P749310

CATALOG NUMBER: LD4D50D010-EU4DR4040509050-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1160.0	21.6
10°-20°	2598.7	48.3
20°-30°	1300.8	24.2
30°-40°	238.4	4.4
40°-50°	65.8	1.2
50°-60°	15.4	0.3
60°-70°	3.0	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5059.4	94.0
0°-40°	5297.9	98.4
0°-60°	5379.1	99.9
0°-90°	5382.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5382.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12531	
5°	12423	###
15°	9679	2599
25°	2583	1301
35°	341	238
45°	75	66
55°	16	15
65°	2	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P749310
CATALOG NUMBER: LD4D50D010-EU4DR4040509050-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	12531.1
2.5°	12512.8
5°	12422.8
7.5°	12135.8
10°	11608.0
12.5°	10785.2
15°	9679.1
17.5°	8240.6
20°	6417.8
22.5°	4375.4
25°	2582.6
27.5°	1365.3
30°	776.0
32.5°	501.4
35°	341.1
37.5°	243.8
40°	176.4
42.5°	120.8
45°	74.7
47.5°	47.6
50°	32.9
52.5°	23.4
55°	16.1
57.5°	10.2
60°	7.3
62.5°	4.4
65°	2.2
67.5°	1.5
70°	0.7
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)