

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P750447

Luminaire Tested: LD4D55D010-EU4DR6555659030-4LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P750447
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D55D010-EU4DR6555659030-4LBS1MW
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4795.5 lumens
Efficiency: N/A
Efficacy: 82.4 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct


Input Watts (W): 58.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P750447
CATALOG NUMBER: LD4D55D010-EU4DR6555659030-4LBS1MW

Luminous Intensity Polar Plot

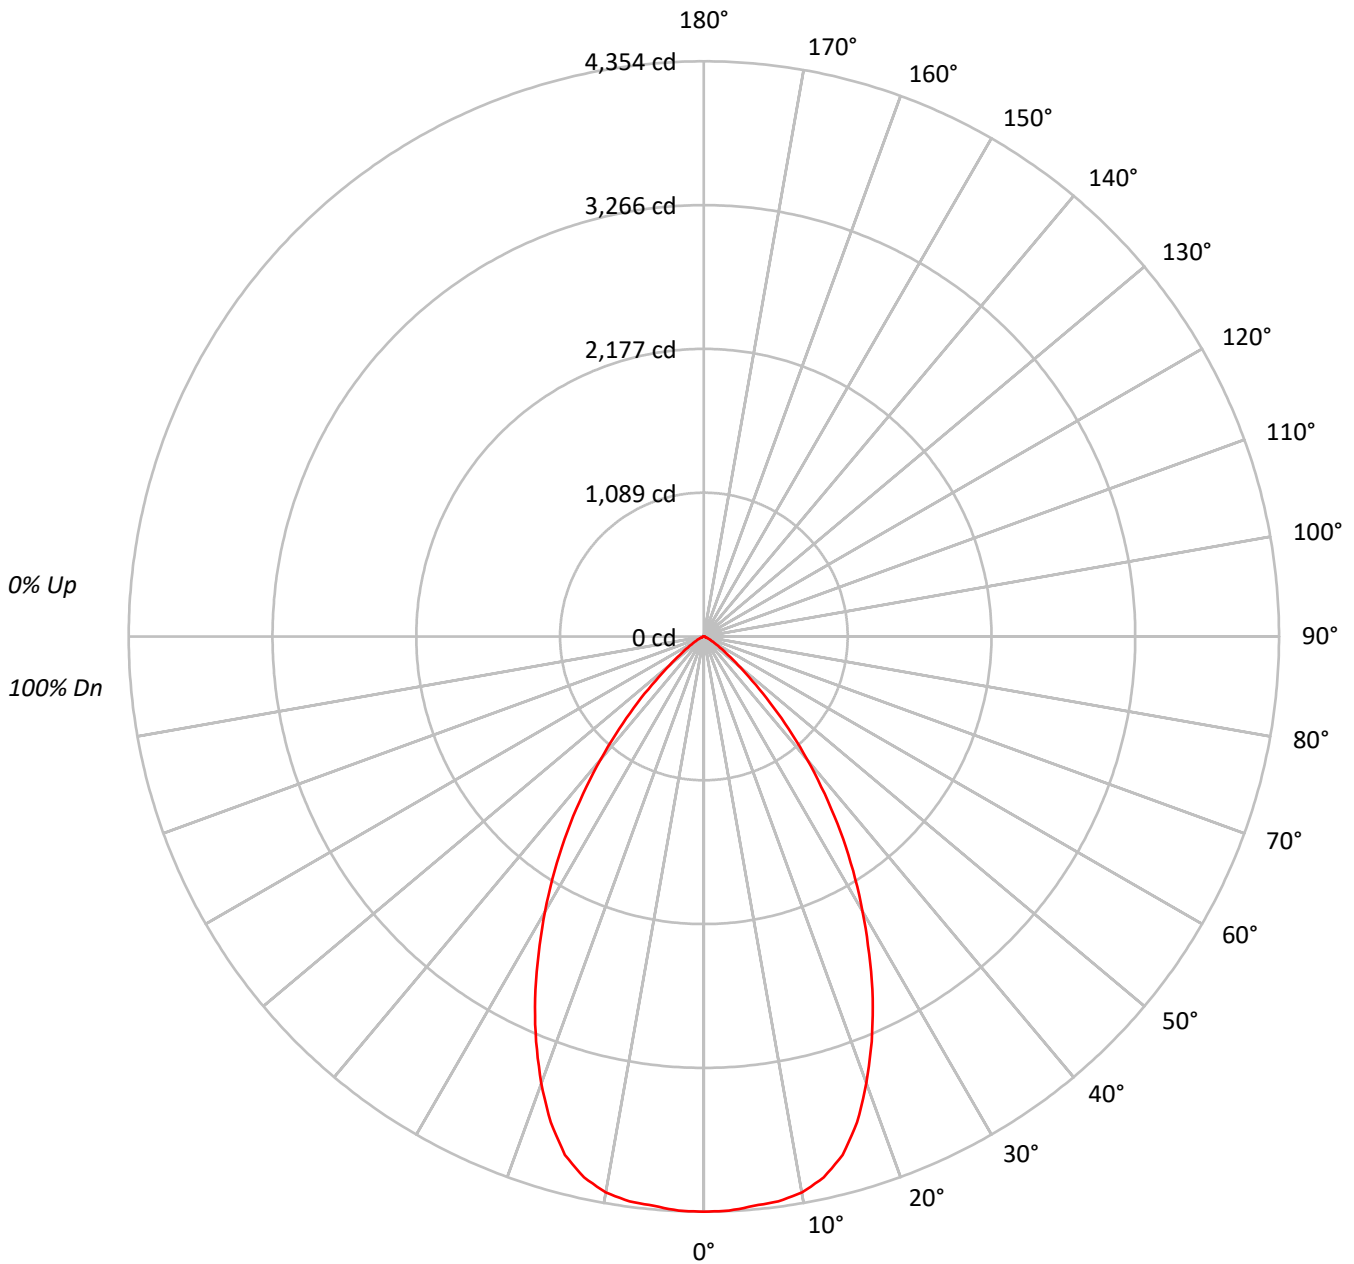



TEST NUMBER: P750447

CATALOG NUMBER: LD4D55D010-EU4DR6555659030-4LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	254302
5°	253661
10°	253445
15°	245630
20°	223617
25°	194871
30°	162076
35°	128422
40°	92686
45°	58560
50°	30520
55°	16221
60°	8515
65°	4685
70°	1964
75°	2166
80°	1514
85°	1273

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 58560 cd/sqm



TEST NUMBER: P750447

CATALOG NUMBER: LD4D55D010-EU4DR6555659030-4LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	411.8	8.6
10°-20°	1127.6	23.5
20°-30°	1378.3	28.7
30°-40°	1118.3	23.3
40°-50°	557.3	11.6
50°-60°	155.4	3.2
60°-70°	35.3	0.7
70°-80°	9.2	0.2
80°-90°	2.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2917.6	60.8
0°-40°	4036.0	84.2
0°-60°	4748.7	99.0
0°-90°	4795.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4795.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4354	
5°	4327	412
15°	4062	1128
25°	3024	1378
35°	1801	1118
45°	709	557
55°	159	155
65°	34	35
75°	10	9
85°	2	2
90°	0	



TEST NUMBER: P750447

CATALOG NUMBER: LD4D55D010-EU4DR6555659030-4LBS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	4354.2
2.5°	4351.0
5°	4326.7
7.5°	4312.6
10°	4273.6
12.5°	4194.3
15°	4062.4
17.5°	3856.4
20°	3597.9
22.5°	3318.9
25°	3024.0
27.5°	2708.5
30°	2403.3
32.5°	2101.9
35°	1801.2
37.5°	1501.1
40°	1215.7
42.5°	948.3
45°	709.0
47.5°	494.0
50°	335.9
52.5°	231.6
55°	159.3
57.5°	107.5
60°	72.9
62.5°	50.5
65°	33.9
67.5°	17.3
70°	11.5
72.5°	10.9
75°	9.6
77.5°	6.4
80°	4.5
82.5°	3.2
85°	1.9
87.5°	1.3
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)