

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P750559

Luminaire Tested: LD4D55D010-EU4DR7055659050-4LBDP1LI

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P750559  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D55D010-EU4DR7055659050-4LBDP1LI  
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6178.1 lumens  
Efficiency: N/A  
Efficacy: 106.2 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 58.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P750559  
CATALOG NUMBER: LD4D55D010-EU4DR7055659050-4LBDP1LI

### Luminous Intensity Polar Plot

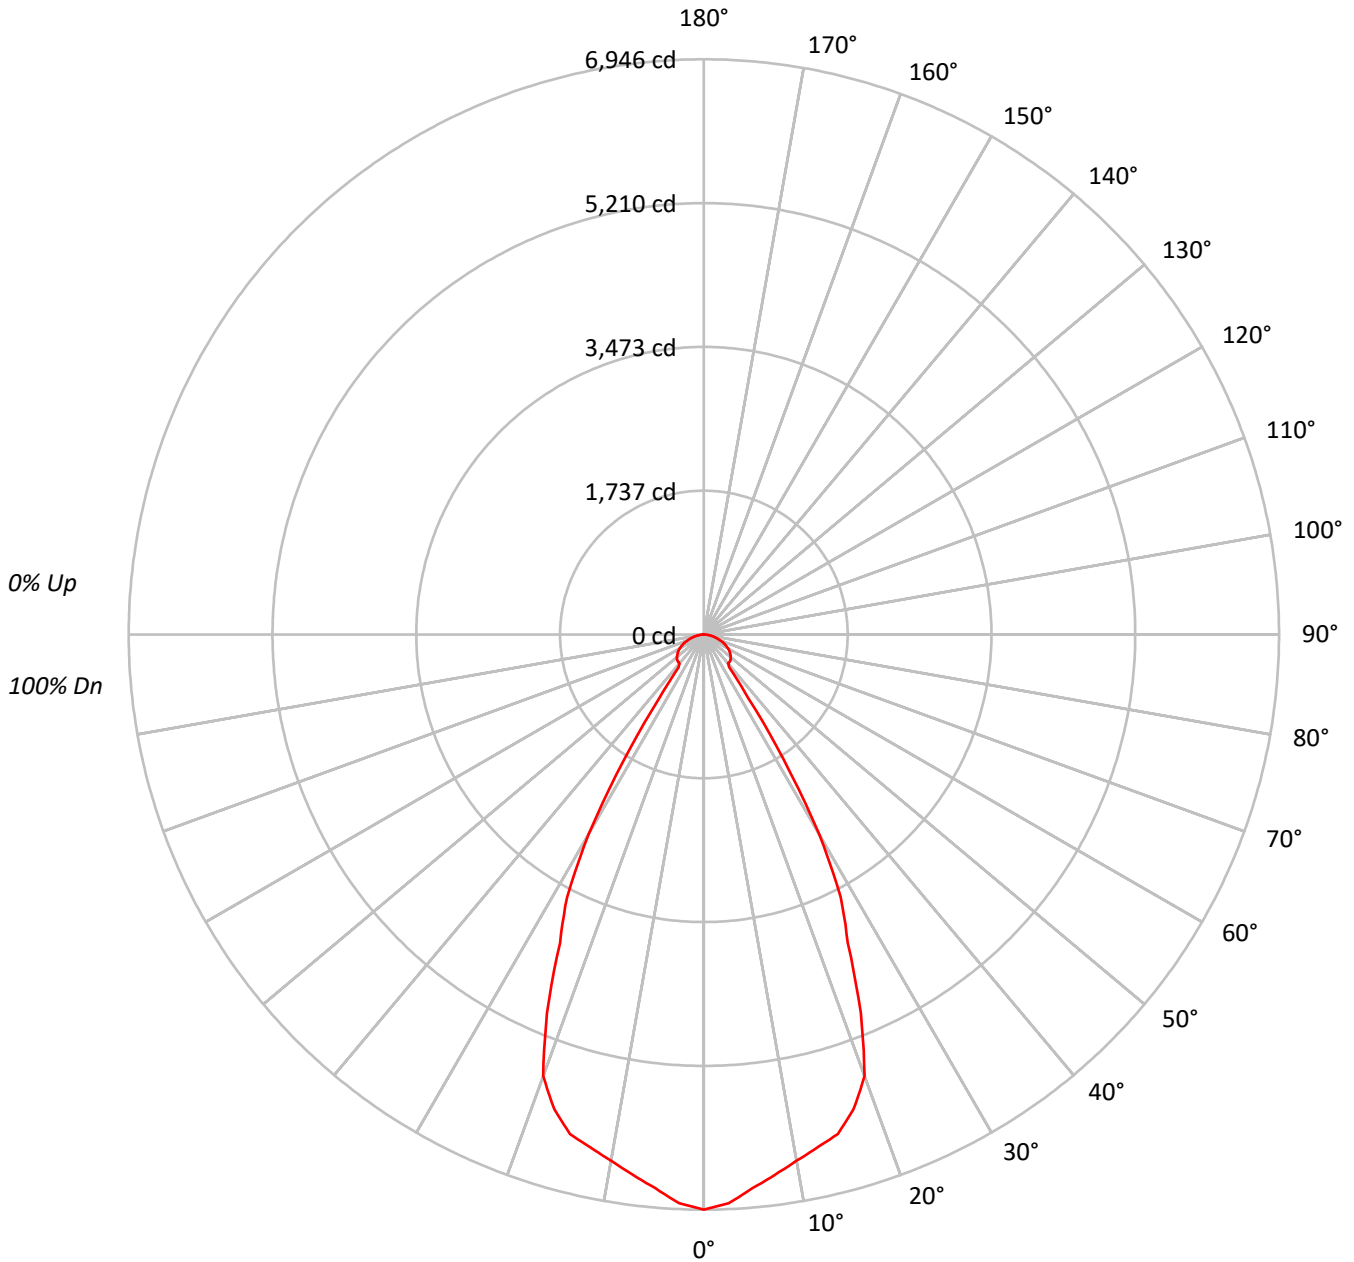



TEST NUMBER: P750559

CATALOG NUMBER: LD4D55D010-EU4DR7055659050-4LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	758914
5°	736368
10°	715836
15°	706449
20°	659674
25°	495581
30°	350331
35°	124099
40°	65253
45°	69502
50°	71969
55°	73320
60°	73773
65°	72208
70°	68140
75°	63154
80°	56062
85°	45507

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 57.5°  
 Luminance: 73796 cd/sqm



TEST NUMBER: P750559

CATALOG NUMBER: LD4D55D010-EU4DR7055659050-4LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	633.3	10.3
10°-20°	1737.0	28.1
20°-30°	1913.1	31.0
30°-40°	730.9	11.8
40°-50°	345.1	5.6
50°-60°	343.1	5.6
60°-70°	274.7	4.4
70°-80°	157.9	2.6
80°-90°	42.9	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4283.3	69.3
0°-40°	5014.3	81.2
0°-60°	5702.5	92.3
0°-90°	6178.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6178.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6946	
5°	6714	633
15°	6245	1737
25°	4111	1913
35°	930	731
45°	450	345
55°	385	343
65°	279	275
75°	150	158
85°	36	43
90°	0	



TEST NUMBER: P750559

CATALOG NUMBER: LD4D55D010-EU4DR7055659050-4LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	6945.9
2.5°	6873.3
5°	6713.9
7.5°	6580.8
10°	6452.1
12.5°	6343.2
15°	6245.4
17.5°	6008.9
20°	5673.5
22.5°	4949.9
25°	4110.8
27.5°	3578.5
30°	2776.8
32.5°	1793.7
35°	930.4
37.5°	502.6
40°	457.5
42.5°	454.2
45°	449.8
47.5°	439.9
50°	423.4
52.5°	404.7
55°	384.9
57.5°	362.9
60°	337.6
62.5°	309.0
65°	279.3
67.5°	246.3
70°	213.3
72.5°	180.4
75°	149.6
77.5°	117.7
80°	89.1
82.5°	62.7
85°	36.3
87.5°	14.3
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)