

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P750560

Luminaire Tested: LD4D55D010-EU4DR7055659050-4LBDP1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P750560  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D55D010-EU4DR7055659050-4LBDP1MW  
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4595.9 lumens  
Efficiency: N/A  
Efficacy: 79.0 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 58.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P750560  
CATALOG NUMBER: LD4D55D010-EU4DR7055659050-4LBDP1MW

### Luminous Intensity Polar Plot

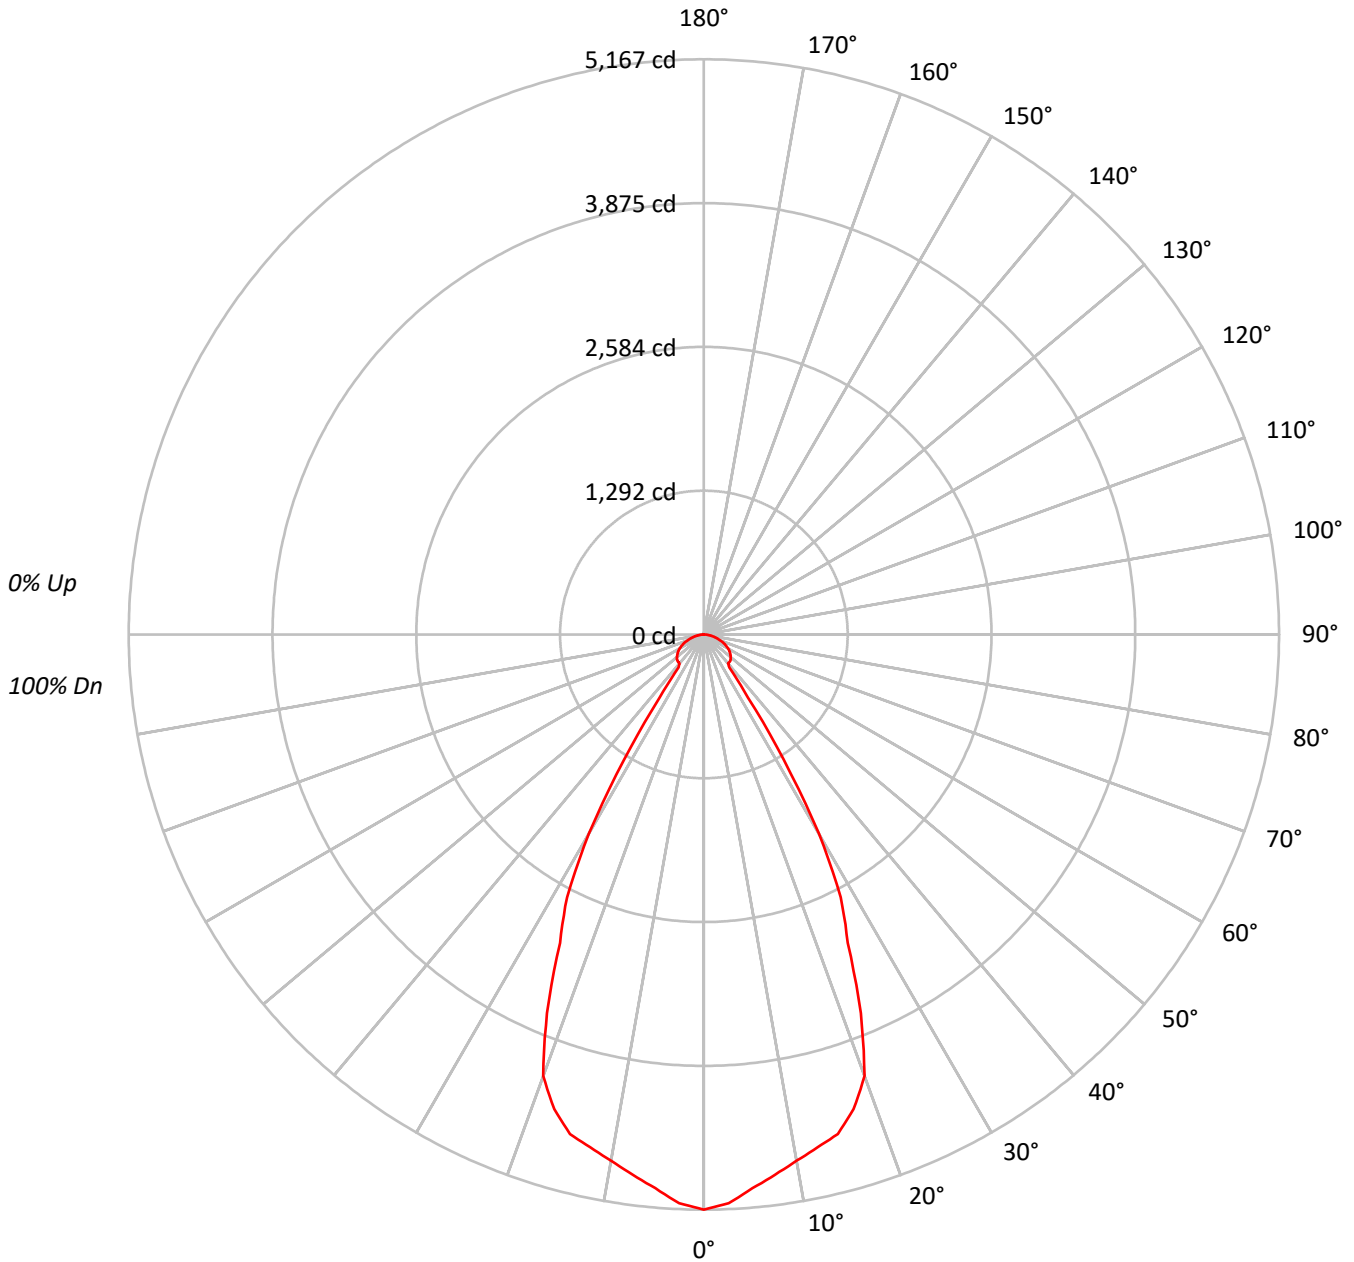



TEST NUMBER: P750560

CATALOG NUMBER: LD4D55D010-EU4DR7055659050-4LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91			91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83			83
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76			76
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70			70
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65			65
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61			61
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57			57
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53			53
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50			50
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48			48

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	564550
5°	547776
10°	532509
15°	525521
20°	490730
25°	368660
30°	260616
35°	92314
40°	48537
45°	51702
50°	53544
55°	54537
60°	54893
65°	53723
70°	50698
75°	46985
80°	41716
85°	33848

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 57.5°  
 Luminance: 54905 cd/sqm



TEST NUMBER: P750560

CATALOG NUMBER: LD4D55D010-EU4DR7055659050-4LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	471.1	10.2
10°-20°	1292.2	28.1
20°-30°	1423.1	31.0
30°-40°	543.7	11.8
40°-50°	256.7	5.6
50°-60°	255.3	5.6
60°-70°	204.4	4.4
70°-80°	117.5	2.6
80°-90°	31.9	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3186.4	69.3
0°-40°	3730.1	81.2
0°-60°	4242.1	92.3
0°-90°	4595.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4595.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5167	
5°	4994	471
15°	4646	1292
25°	3058	1423
35°	692	544
45°	335	257
55°	286	255
65°	208	204
75°	111	117
85°	27	32
90°	0	



TEST NUMBER: P750560

CATALOG NUMBER: LD4D55D010-EU4DR7055659050-4LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	5167.0
2.5°	5113.0
5°	4994.4
7.5°	4895.4
10°	4799.7
12.5°	4718.7
15°	4645.9
17.5°	4470.0
20°	4220.5
22.5°	3682.2
25°	3058.0
27.5°	2662.1
30°	2065.7
32.5°	1334.3
35°	692.1
37.5°	373.9
40°	340.3
42.5°	337.9
45°	334.6
47.5°	327.2
50°	315.0
52.5°	301.1
55°	286.3
57.5°	270.0
60°	251.2
62.5°	229.9
65°	207.8
67.5°	183.3
70°	158.7
72.5°	134.2
75°	111.3
77.5°	87.5
80°	66.3
82.5°	46.6
85°	27.0
87.5°	10.6
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)