

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P751521

Luminaire Tested: LD4D65D010-EU4DR3555659027-4LBDP1LI

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P751521  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D65D010-EU4DR3555659027-4LBDP1LI  
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6478.1 lumens  
Efficiency: N/A  
Efficacy: 89.0 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 72.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P751521  
CATALOG NUMBER: LD4D65D010-EU4DR3555659027-4LBDP1LI

### Luminous Intensity Polar Plot

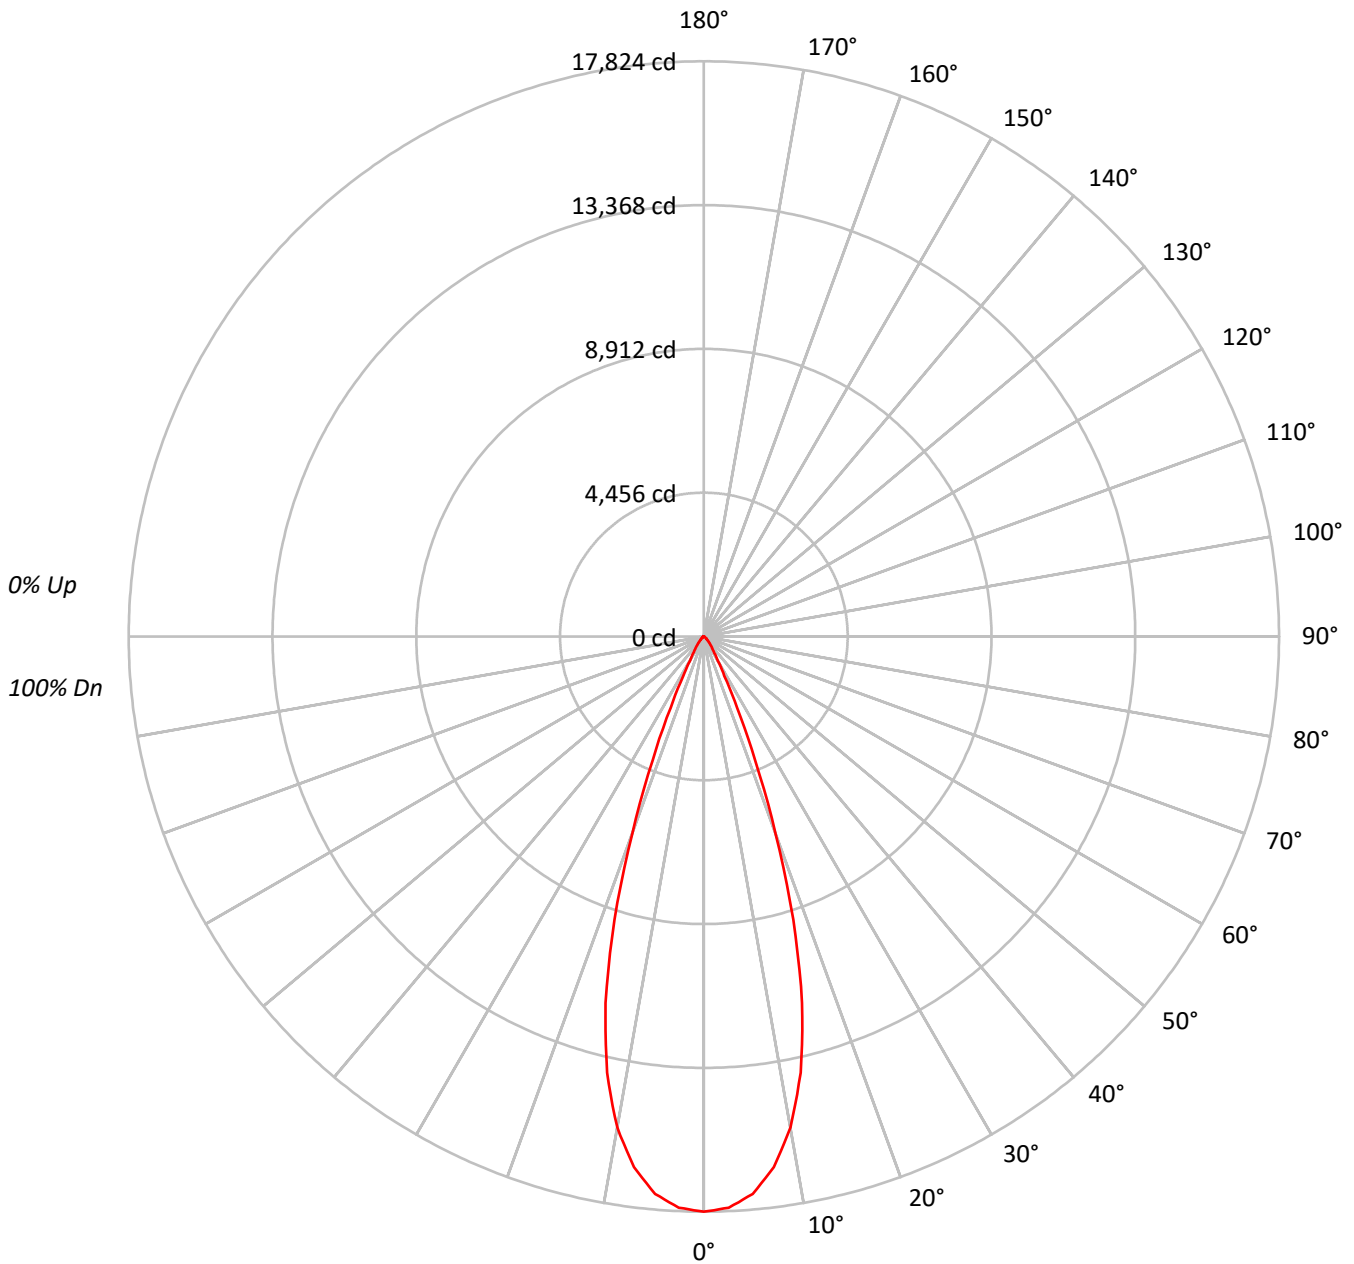



TEST NUMBER: P751521

CATALOG NUMBER: LD4D65D010-EU4DR3555659027-4LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96						96													
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92						92													
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88						88													
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84						84													
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81						81													
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78						78													
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75						75													
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72						72													
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70						70													
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68						68													

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1947486
5°	1901731
10°	1713965
15°	1330312
20°	754530
25°	293542
30°	109510
35°	60036
40°	39237
45°	23888
50°	15196
55°	10744
60°	7867
65°	4266
70°	319
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 23888 cd/sqm



TEST NUMBER: P751521  
 CATALOG NUMBER: LD4D65D010-EU4DR3555659027-4LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1594.7	24.6
10°-20°	3113.5	48.1
20°-30°	1269.8	19.6
30°-40°	303.9	4.7
40°-50°	126.6	2.0
50°-60°	52.4	0.8
60°-70°	16.4	0.3
70°-80°	0.4	0.0
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5978.0	92.3
0°-40°	6281.9	97.0
0°-60°	6461.0	99.7
0°-90°	6478.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6478.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	17824	
5°	17339	###
15°	11761	3114
25°	2435	1270
35°	450	304
45°	155	127
55°	56	52
65°	16	16
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P751521

CATALOG NUMBER: LD4D65D010-EU4DR3555659027-4LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	17824.2
2.5°	17717.3
5°	17339.2
7.5°	16584.9
10°	15448.6
12.5°	13848.6
15°	11760.7
17.5°	9207.1
20°	6489.3
22.5°	4138.0
25°	2434.9
27.5°	1376.4
30°	868.0
32.5°	609.5
35°	450.1
37.5°	348.0
40°	275.1
42.5°	211.9
45°	154.6
47.5°	115.7
50°	89.4
52.5°	71.0
55°	56.4
57.5°	45.7
60°	36.0
62.5°	26.2
65°	16.5
67.5°	5.8
70°	1.0
72.5°	1.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	1.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)