

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P751992

Luminaire Tested: LD4D65D010-EU4DR6555659027-4LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P751992
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D65D010-EU4DR6555659027-4LBS1H
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5957.7 lumens
Efficiency: N/A
Efficacy: 81.8 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct


Input Watts (W): 72.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P751992
CATALOG NUMBER: LD4D65D010-EU4DR6555659027-4LBS1H

Luminous Intensity Polar Plot

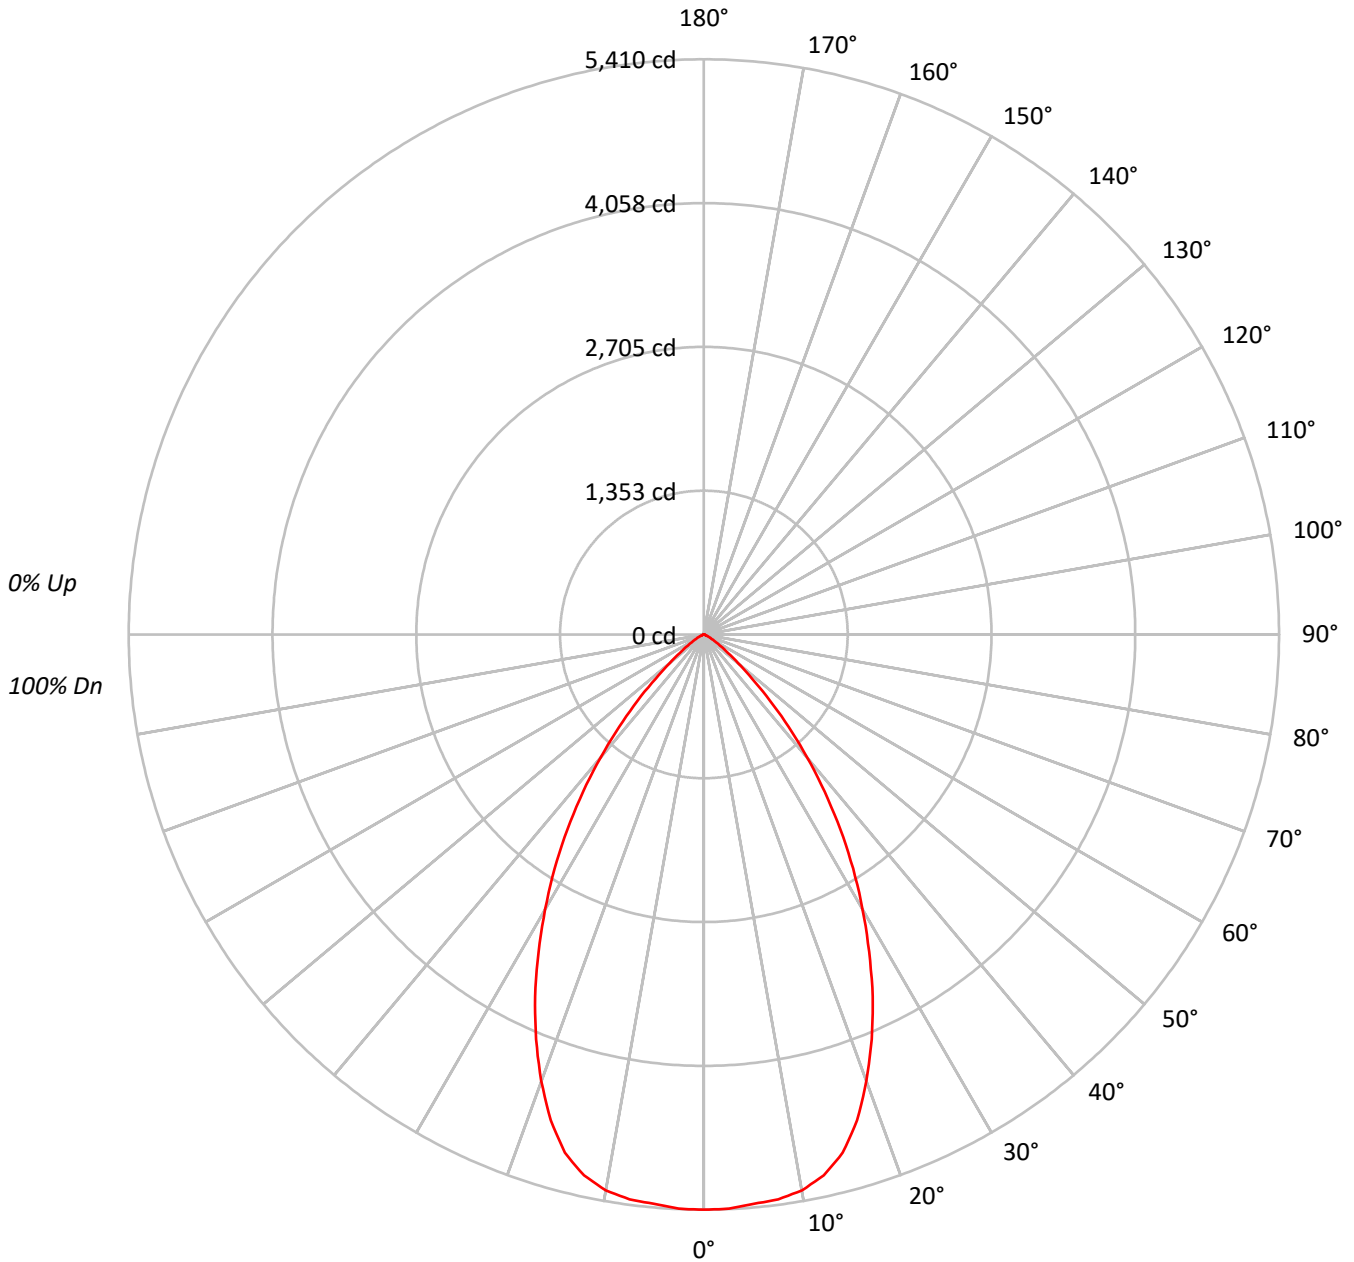



TEST NUMBER: P751992
 CATALOG NUMBER: LD4D65D010-EU4DR6555659027-4LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	315936
5°	315138
10°	314867
15°	305162
20°	277814
25°	242094
30°	201353
35°	159543
40°	115154
45°	72750
50°	37916
55°	20151
60°	10583
65°	5818
70°	2442
75°	2685
80°	1883
85°	1608

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 72750 cd/sqm



TEST NUMBER: P751992

CATALOG NUMBER: LD4D65D010-EU4DR6555659027-4LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	511.6	8.6
10°-20°	1400.9	23.5
20°-30°	1712.3	28.7
30°-40°	1389.3	23.3
40°-50°	692.3	11.6
50°-60°	193.1	3.2
60°-70°	43.9	0.7
70°-80°	11.4	0.2
80°-90°	2.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3624.7	60.8
0°-40°	5014.1	84.2
0°-60°	5899.5	99.0
0°-90°	5957.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5957.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5410	
5°	5375	512
15°	5047	1401
25°	3757	1712
35°	2238	1389
45°	881	692
55°	198	193
65°	42	44
75°	12	11
85°	2	3
90°	0	



TEST NUMBER: P751992

CATALOG NUMBER: LD4D65D010-EU4DR6555659027-4LBS1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	5409.5
2.5°	5405.5
5°	5375.3
7.5°	5357.8
10°	5309.3
12.5°	5210.7
15°	5047.0
17.5°	4791.0
20°	4469.9
22.5°	4123.3
25°	3756.8
27.5°	3364.9
30°	2985.7
32.5°	2611.3
35°	2237.7
37.5°	1864.9
40°	1510.4
42.5°	1178.1
45°	880.8
47.5°	613.7
50°	417.3
52.5°	287.8
55°	197.9
57.5°	133.5
60°	90.6
62.5°	62.8
65°	42.1
67.5°	21.5
70°	14.3
72.5°	13.5
75°	11.9
77.5°	7.9
80°	5.6
82.5°	4.0
85°	2.4
87.5°	1.6
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)