

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P751455

Luminaire Tested: LD4D65D010-EU4DR3055659030-4LBDP1H

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P751455
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D65D010-EU4DR3055659030-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6498.2 lumens
Efficiency: N/A
Efficacy: 89.3 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct


Input Watts (W): 72.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P751455
CATALOG NUMBER: LD4D65D010-EU4DR3055659030-4LBDP1H

Luminous Intensity Polar Plot

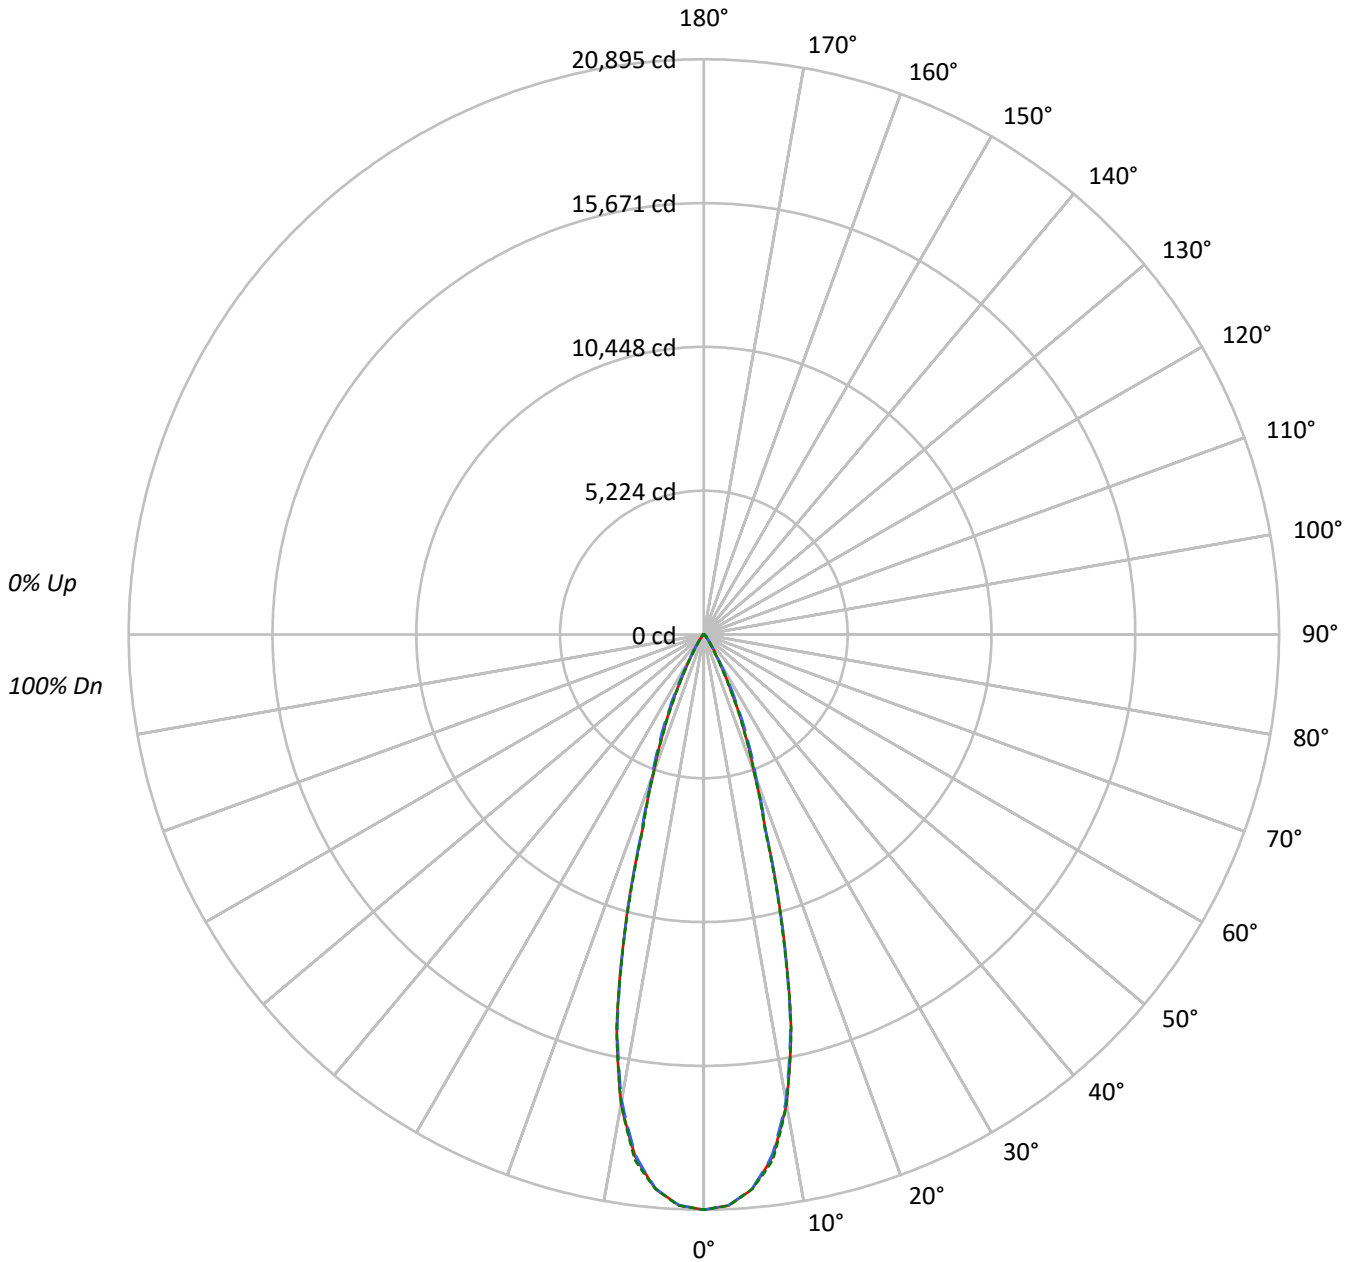



TEST NUMBER: P751455

CATALOG NUMBER: LD4D65D010-EU4DR3055659030-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1599367	1599367	1599367
5°	1553450	1551637	1553527
10°	1345523	1336032	1345204
15°	877884	873169	868787
20°	436530	452910	435951
25°	219899	247964	215389
30°	88040	95933	76709
35°	40834	39115	32780
40°	17626	19574	16607
45°	12438	15436	12546
50°	4275	11241	4525
55°	2469	4657	2602
60°	1730	2036	1730
65°	1123	1123	1123
70°	694	470	694
75°	0	296	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 15436 cd/sqm



TEST NUMBER: P751455

CATALOG NUMBER: LD4D65D010-EU4DR3055659030-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1837.4	28.3
10°-20°	2959.1	45.5
20°-30°	1278.7	19.7
30°-40°	291.5	4.5
40°-50°	100.1	1.5
50°-60°	24.4	0.4
60°-70°	6.3	0.1
70°-80°	0.7	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6075.2	93.5
0°-40°	6366.7	98.0
0°-60°	6491.2	99.9
0°-90°	6498.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6498.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	20895	20895	20895	20895	20895	
5°	20218	20198	20194	20236	20219	1839
15°	11078	10945	11019	10983	10964	2966
25°	2604	2702	2936	2633	2550	1246
35°	437	446	419	416	351	296
45°	115	143	143	143	116	82
55°	18	20	35	20	20	18
65°	6	6	6	6	6	6
75°	0	0	1	0	0	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P751455

CATALOG NUMBER: LD4D65D010-EU4DR3055659030-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	20894.9	20894.9	20894.9	20894.9	20894.9
2.5°	20756.4	20742.0	20750.2	20760.5	20764.6
5°	20217.8	20198.3	20194.2	20236.3	20218.8
7.5°	19131.4	19103.7	19061.7	19157.1	19246.3
10°	17311.5	17280.7	17189.4	17234.6	17307.4
12.5°	14624.8	14525.3	14523.2	14666.8	14647.3
15°	11078.3	10945.0	11018.8	10982.9	10963.5
17.5°	7449.9	7398.6	7497.0	7467.3	7339.1
20°	5359.1	5372.5	5560.2	5465.8	5352.0
22.5°	3910.6	3958.8	4181.4	3938.3	3849.1
25°	2603.7	2702.1	2936.0	2633.4	2550.3
27.5°	1601.4	1646.5	1883.5	1580.9	1535.7
30°	996.1	973.5	1085.4	931.5	867.9
32.5°	653.5	624.8	660.7	593.0	541.7
35°	437.0	446.3	418.6	415.5	350.8
37.5°	272.9	313.9	277.0	295.4	225.7
40°	176.4	227.7	195.9	216.5	166.2
42.5°	144.6	175.4	161.1	171.3	147.7
45°	114.9	142.6	142.6	142.6	115.9
47.5°	63.6	95.4	122.1	97.5	67.7
50°	35.9	48.2	94.4	50.3	38.0
52.5°	24.6	27.7	64.6	28.7	25.6
55°	18.5	19.5	34.9	20.5	19.5
57.5°	14.4	15.4	18.5	15.4	14.4
60°	11.3	11.3	13.3	12.3	11.3
62.5°	8.2	8.2	9.2	8.2	8.2
65°	6.2	6.2	6.2	6.2	6.2
67.5°	3.1	4.1	4.1	4.1	4.1
70°	3.1	2.1	2.1	2.1	3.1
72.5°	2.1	1.0	1.0	1.0	1.0
75°	0.0	0.0	1.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)