

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752005

Luminaire Tested: LD4D65D010-EU4DR6555659030-4LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P752005
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D65D010-EU4DR6555659030-4LBS1H
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6137.7 lumens
Efficiency: N/A
Efficacy: 84.3 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct


Input Watts (W): 72.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P752005
CATALOG NUMBER: LD4D65D010-EU4DR6555659030-4LBS1H

Luminous Intensity Polar Plot

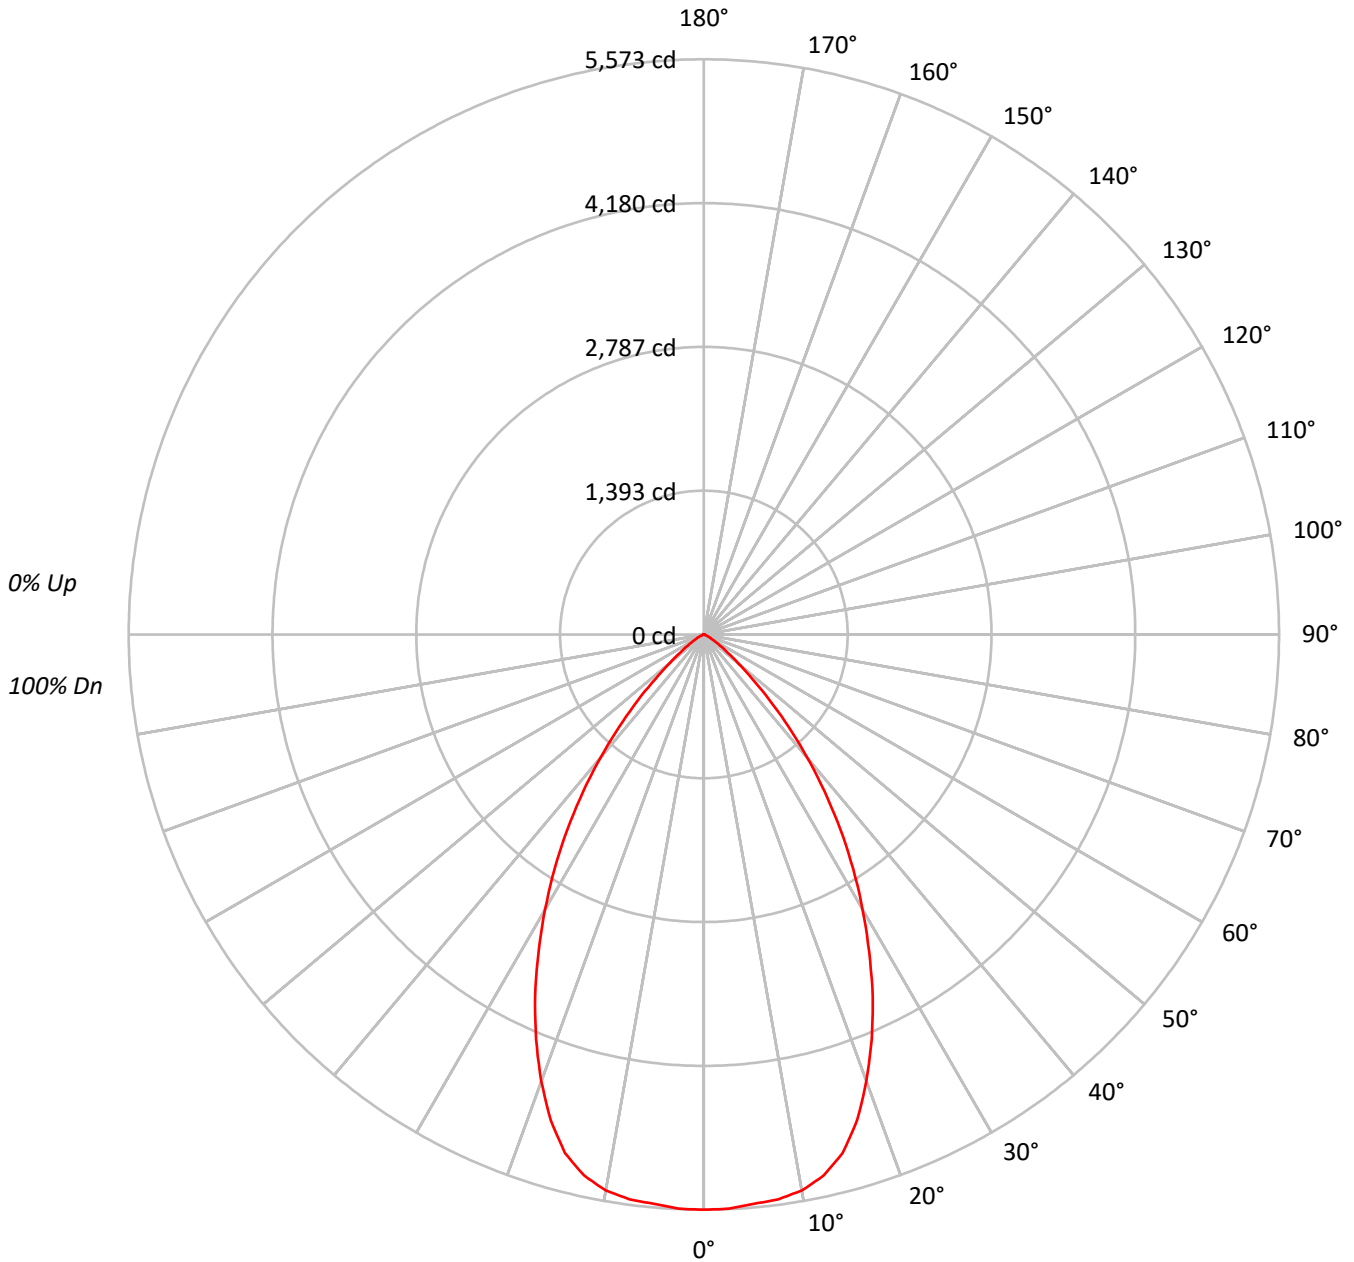



TEST NUMBER: P752005

CATALOG NUMBER: LD4D65D010-EU4DR6555659030-4LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	325479
5°	324659
10°	324380
15°	314383
20°	286204
25°	249408
30°	207442
35°	164363
40°	118631
45°	74947
50°	39061
55°	20762
60°	10910
65°	5998
70°	2510
75°	2776
80°	1917
85°	1675

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 74947 cd/sqm



TEST NUMBER: P752005

CATALOG NUMBER: LD4D65D010-EU4DR6555659030-4LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	527.0	8.6
10°-20°	1443.2	23.5
20°-30°	1764.1	28.7
30°-40°	1431.3	23.3
40°-50°	713.2	11.6
50°-60°	199.0	3.2
60°-70°	45.2	0.7
70°-80°	11.8	0.2
80°-90°	3.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3734.3	60.8
0°-40°	5165.6	84.2
0°-60°	6077.8	99.0
0°-90°	6137.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6137.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5573	
5°	5538	527
15°	5200	1443
25°	3870	1764
35°	2305	1431
45°	907	713
55°	204	199
65°	43	45
75°	12	12
85°	2	3
90°	0	



TEST NUMBER: P752005

CATALOG NUMBER: LD4D65D010-EU4DR6555659030-4LBS1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	5572.9
2.5°	5568.8
5°	5537.7
7.5°	5519.7
10°	5469.7
12.5°	5368.2
15°	5199.5
17.5°	4935.8
20°	4604.9
22.5°	4247.9
25°	3870.3
27.5°	3466.6
30°	3076.0
32.5°	2690.2
35°	2305.3
37.5°	1921.2
40°	1556.0
42.5°	1213.7
45°	907.4
47.5°	632.2
50°	429.9
52.5°	296.5
55°	203.9
57.5°	137.6
60°	93.4
62.5°	64.7
65°	43.4
67.5°	22.1
70°	14.7
72.5°	13.9
75°	12.3
77.5°	8.2
80°	5.7
82.5°	4.1
85°	2.5
87.5°	1.6
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)