

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752084

Luminaire Tested: LD4D65D010-EU4DR7055659030-4LBS1LI

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P752084  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D65D010-EU4DR7055659030-4LBS1LI  
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7424.1 lumens  
Efficiency: N/A  
Efficacy: 102.0 lumens/watt  
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 72.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P752084  
CATALOG NUMBER: LD4D65D010-EU4DR7055659030-4LBS1LI

### Luminous Intensity Polar Plot

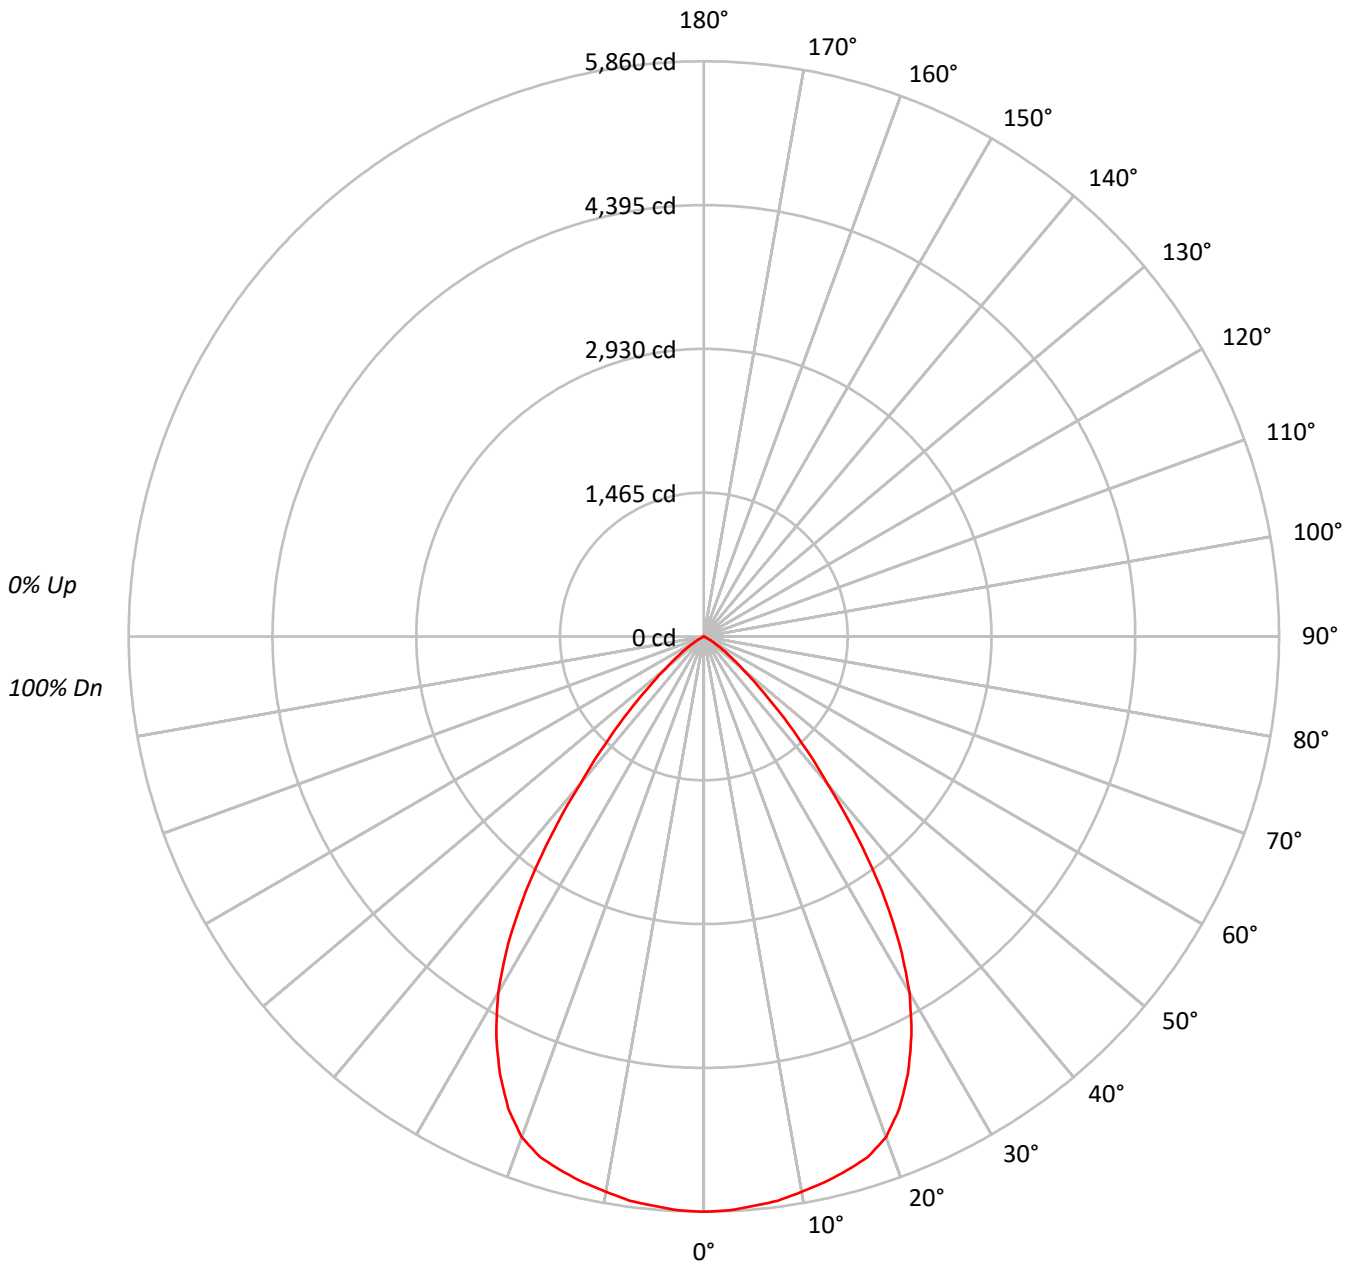



TEST NUMBER: P752084

CATALOG NUMBER: LD4D65D010-EU4DR7055659030-4LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93	93	93	93
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85	85	85	85
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78	78	78	78
4	95	87	81	76	93	86	80	76	83	78	75	81	77	74	79	76	73	71	71	71	71
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65	65	65	65
6	84	75	68	63	83	74	68	63	72	67	63	71	66	62	69	65	62	60	60	60	60
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	61	57	56	56	56	56
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51	51	51	51
9	71	61	54	50	70	60	54	50	59	53	50	58	53	49	57	53	49	48	48	48	48
10	67	57	50	46	66	56	50	46	55	50	46	55	50	46	54	49	46	44	44	44	44

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	640235
5°	638634
10°	637253
15°	637075
20°	630850
25°	592605
30°	528309
35°	421223
40°	279697
45°	167219
50°	86690
55°	45565
60°	16127
65°	284
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 167219 cd/sqm



TEST NUMBER: P752084

CATALOG NUMBER: LD4D65D010-EU4DR7055659030-4LBS1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	553.7	7.5
10°-20°	1588.2	21.4
20°-30°	2240.4	30.2
30°-40°	1934.1	26.1
40°-50°	866.1	11.7
50°-60°	226.8	3.1
60°-70°	14.8	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4382.3	59.0
0°-40°	6316.4	85.1
0°-60°	7409.3	99.8
0°-90°	7424.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7424.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5860	
5°	5823	554
15°	5632	1588
25°	4916	2240
35°	3158	1934
45°	1082	866
55°	239	227
65°	1	15
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P752084

CATALOG NUMBER: LD4D65D010-EU4DR7055659030-4LBS1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	5859.7
2.5°	5853.4
5°	5822.8
7.5°	5797.5
10°	5743.8
12.5°	5695.3
15°	5632.1
17.5°	5559.4
20°	5425.6
22.5°	5205.3
25°	4915.6
27.5°	4579.4
30°	4187.5
32.5°	3708.0
35°	3158.0
37.5°	2551.0
40°	1961.0
42.5°	1490.0
45°	1082.2
47.5°	746.0
50°	510.0
52.5°	351.9
55°	239.2
57.5°	144.4
60°	73.8
62.5°	23.2
65°	1.1
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)