

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752085

Luminaire Tested: LD4D65D010-EU4DR7055659030-4LBS1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P752085
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D65D010-EU4DR7055659030-4LBS1MW
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6714.1 lumens
Efficiency: N/A
Efficacy: 92.2 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 72.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P752085
CATALOG NUMBER: LD4D65D010-EU4DR7055659030-4LBS1MW

Luminous Intensity Polar Plot

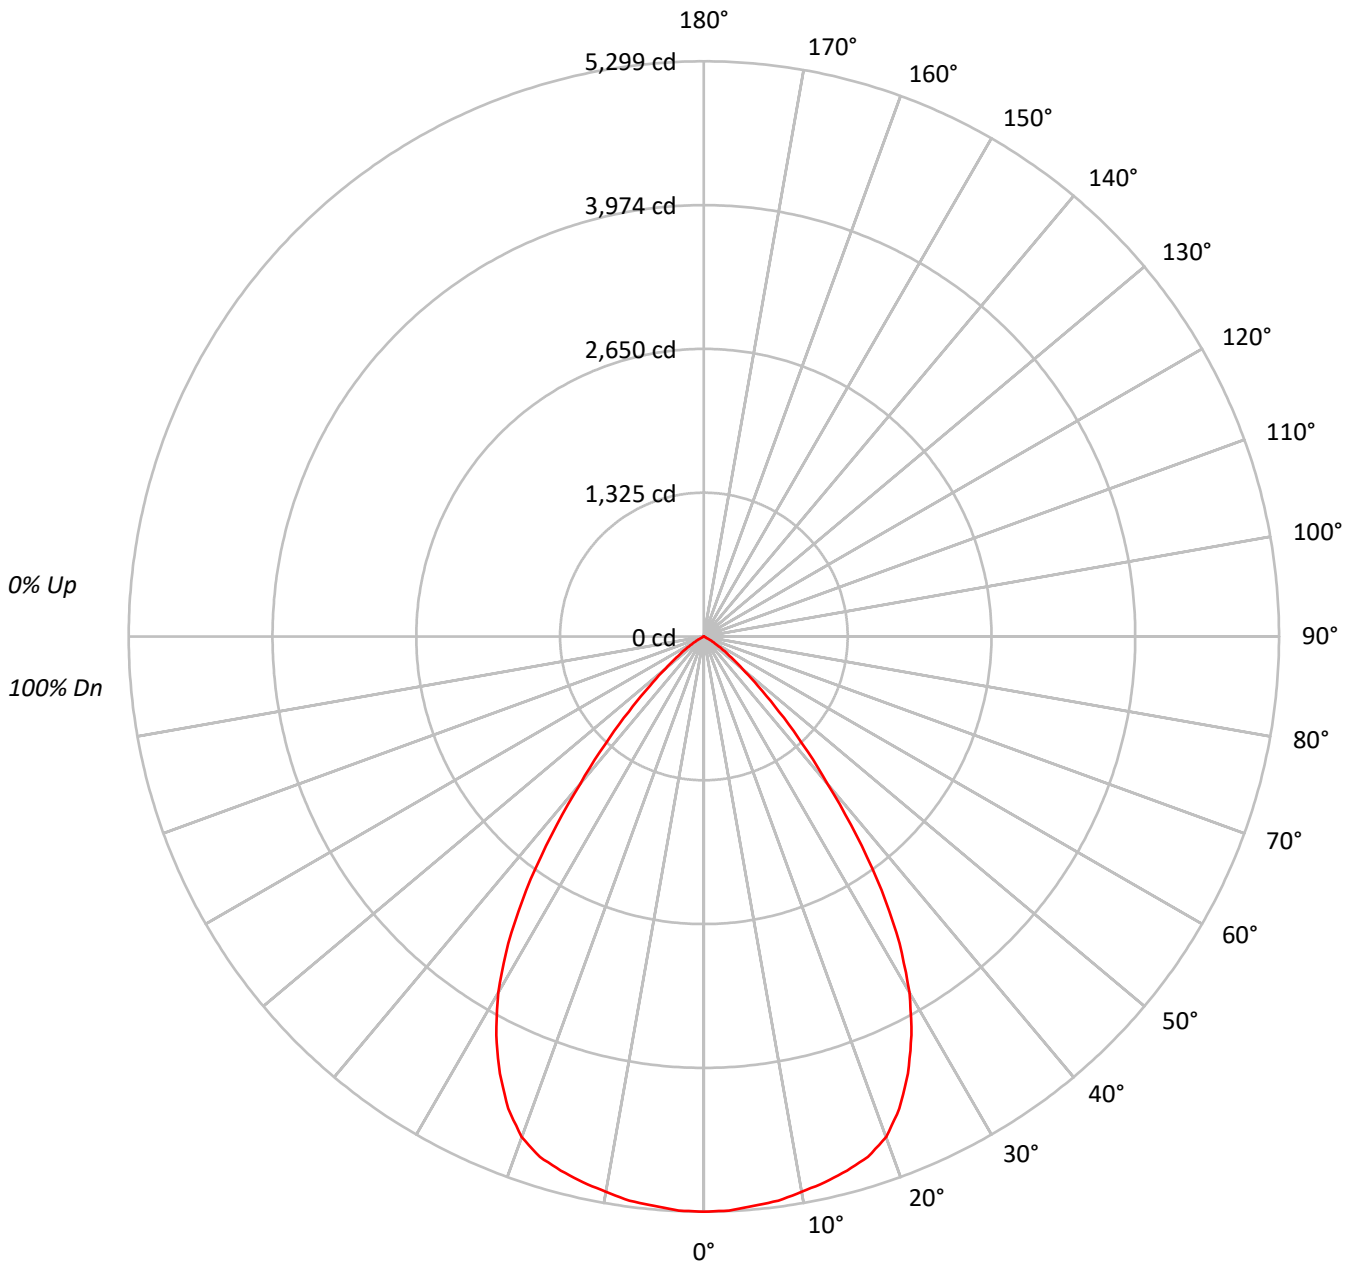



TEST NUMBER: P752085

CATALOG NUMBER: LD4D65D010-EU4DR7055659030-4LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93				93															
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85				85															
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78				78															
4	95	87	81	76	93	86	80	76	83	78	75	81	77	74	79	76	73	71				71															
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65				65															
6	84	75	68	63	83	74	68	63	72	67	63	71	66	62	69	65	62	60				60															
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	61	57	56				56															
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51				51															
9	71	61	54	50	70	60	54	50	59	53	50	58	53	49	57	53	49	48				48															
10	67	57	50	46	66	56	50	46	55	50	46	55	50	46	54	49	46	44				44															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	579006
5°	577554
10°	576310
15°	576140
20°	570516
25°	535919
30°	477781
35°	380928
40°	252940
45°	151227
50°	78395
55°	41203
60°	14575
65°	259
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 151227 cd/sqm



TEST NUMBER: P752085

CATALOG NUMBER: LD4D65D010-EU4DR7055659030-4LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	500.8	7.5
10°-20°	1436.3	21.4
20°-30°	2026.2	30.2
30°-40°	1749.1	26.1
40°-50°	783.3	11.7
50°-60°	205.1	3.1
60°-70°	13.4	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3963.2	59.0
0°-40°	5712.3	85.1
0°-60°	6700.7	99.8
0°-90°	6714.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6714.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5299	
5°	5266	501
15°	5093	1436
25°	4445	2026
35°	2856	1749
45°	979	783
55°	216	205
65°	1	13
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P752085
CATALOG NUMBER: LD4D65D010-EU4DR7055659030-4LBS1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	5299.3
2.5°	5293.6
5°	5265.9
7.5°	5243.1
10°	5194.5
12.5°	5150.6
15°	5093.4
17.5°	5027.7
20°	4906.7
22.5°	4707.5
25°	4445.4
27.5°	4141.5
30°	3787.0
32.5°	3353.4
35°	2855.9
37.5°	2307.1
40°	1773.4
42.5°	1347.5
45°	978.7
47.5°	674.7
50°	461.2
52.5°	318.3
55°	216.3
57.5°	130.6
60°	66.7
62.5°	21.0
65°	1.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)