

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752098

Luminaire Tested: LD4D65D010-EU4DR7055659035-4LBS1MW

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P752098  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D65D010-EU4DR7055659035-4LBS1MW  
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6784.8 lumens  
Efficiency: N/A  
Efficacy: 93.2 lumens/watt  
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 72.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P752098  
CATALOG NUMBER: LD4D65D010-EU4DR7055659035-4LBS1MW

### Luminous Intensity Polar Plot

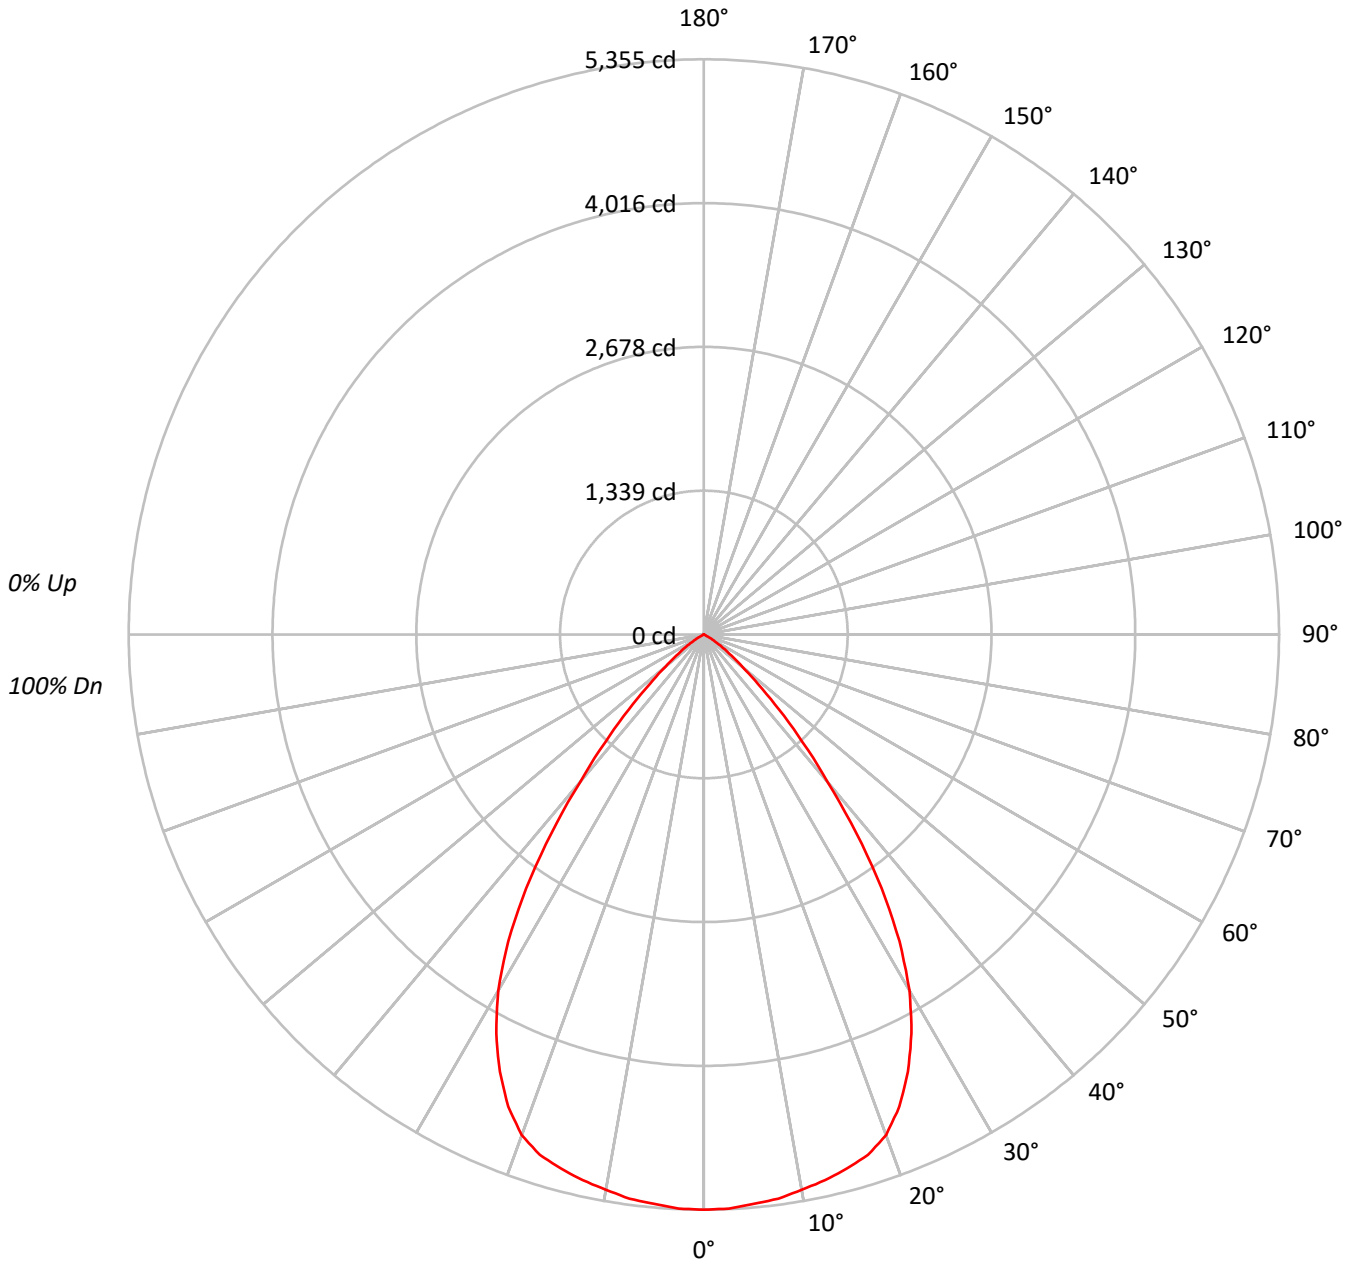



TEST NUMBER: P752098

CATALOG NUMBER: LD4D65D010-EU4DR7055659035-4LBS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93	93	93	93
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85	85	85	85
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78	78	78	78
4	95	87	81	76	93	86	80	76	83	78	75	81	77	74	79	76	73	71	71	71	71
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65	65	65	65
6	84	75	68	63	83	74	68	63	72	67	63	71	66	62	69	65	62	60	60	60	60
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	61	57	56	56	56	56
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51	51	51	51
9	71	61	54	50	70	60	54	50	59	53	50	58	53	49	57	53	49	48	48	48	48
10	67	57	50	46	66	56	50	46	55	50	46	55	50	46	54	49	46	44	44	44	44

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	585102
5°	583641
10°	582379
15°	582215
20°	576527
25°	541573
30°	482815
35°	384943
40°	255607
45°	152818
50°	79227
55°	41641
60°	14728
65°	259
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 152818 cd/sqm



TEST NUMBER: P752098

CATALOG NUMBER: LD4D65D010-EU4DR7055659035-4LBS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	506.1	7.5
10°-20°	1451.4	21.4
20°-30°	2047.5	30.2
30°-40°	1767.5	26.1
40°-50°	791.5	11.7
50°-60°	207.2	3.1
60°-70°	13.5	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4005.0	59.0
0°-40°	5772.5	85.1
0°-60°	6771.2	99.8
0°-90°	6784.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6784.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5355	
5°	5321	506
15°	5147	1451
25°	4492	2048
35°	2886	1768
45°	989	792
55°	219	207
65°	1	14
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P752098

CATALOG NUMBER: LD4D65D010-EU4DR7055659035-4LBS1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	5355.1
2.5°	5349.3
5°	5321.4
7.5°	5298.3
10°	5249.2
12.5°	5204.9
15°	5147.1
17.5°	5080.6
20°	4958.4
22.5°	4757.1
25°	4492.3
27.5°	4185.1
30°	3826.9
32.5°	3388.7
35°	2886.0
37.5°	2331.4
40°	1792.1
42.5°	1361.6
45°	989.0
47.5°	681.8
50°	466.1
52.5°	321.6
55°	218.6
57.5°	131.9
60°	67.4
62.5°	21.2
65°	1.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)