

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752043

Luminaire Tested: LD4D65D010-EU4DR6555659050-4LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P752043
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D65D010-EU4DR6555659050-4LBS1B
Description: 4 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6071.0 lumens
Efficiency: N/A
Efficacy: 83.4 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct


Input Watts (W): 72.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P752043
CATALOG NUMBER: LD4D65D010-EU4DR6555659050-4LBS1B

Luminous Intensity Polar Plot

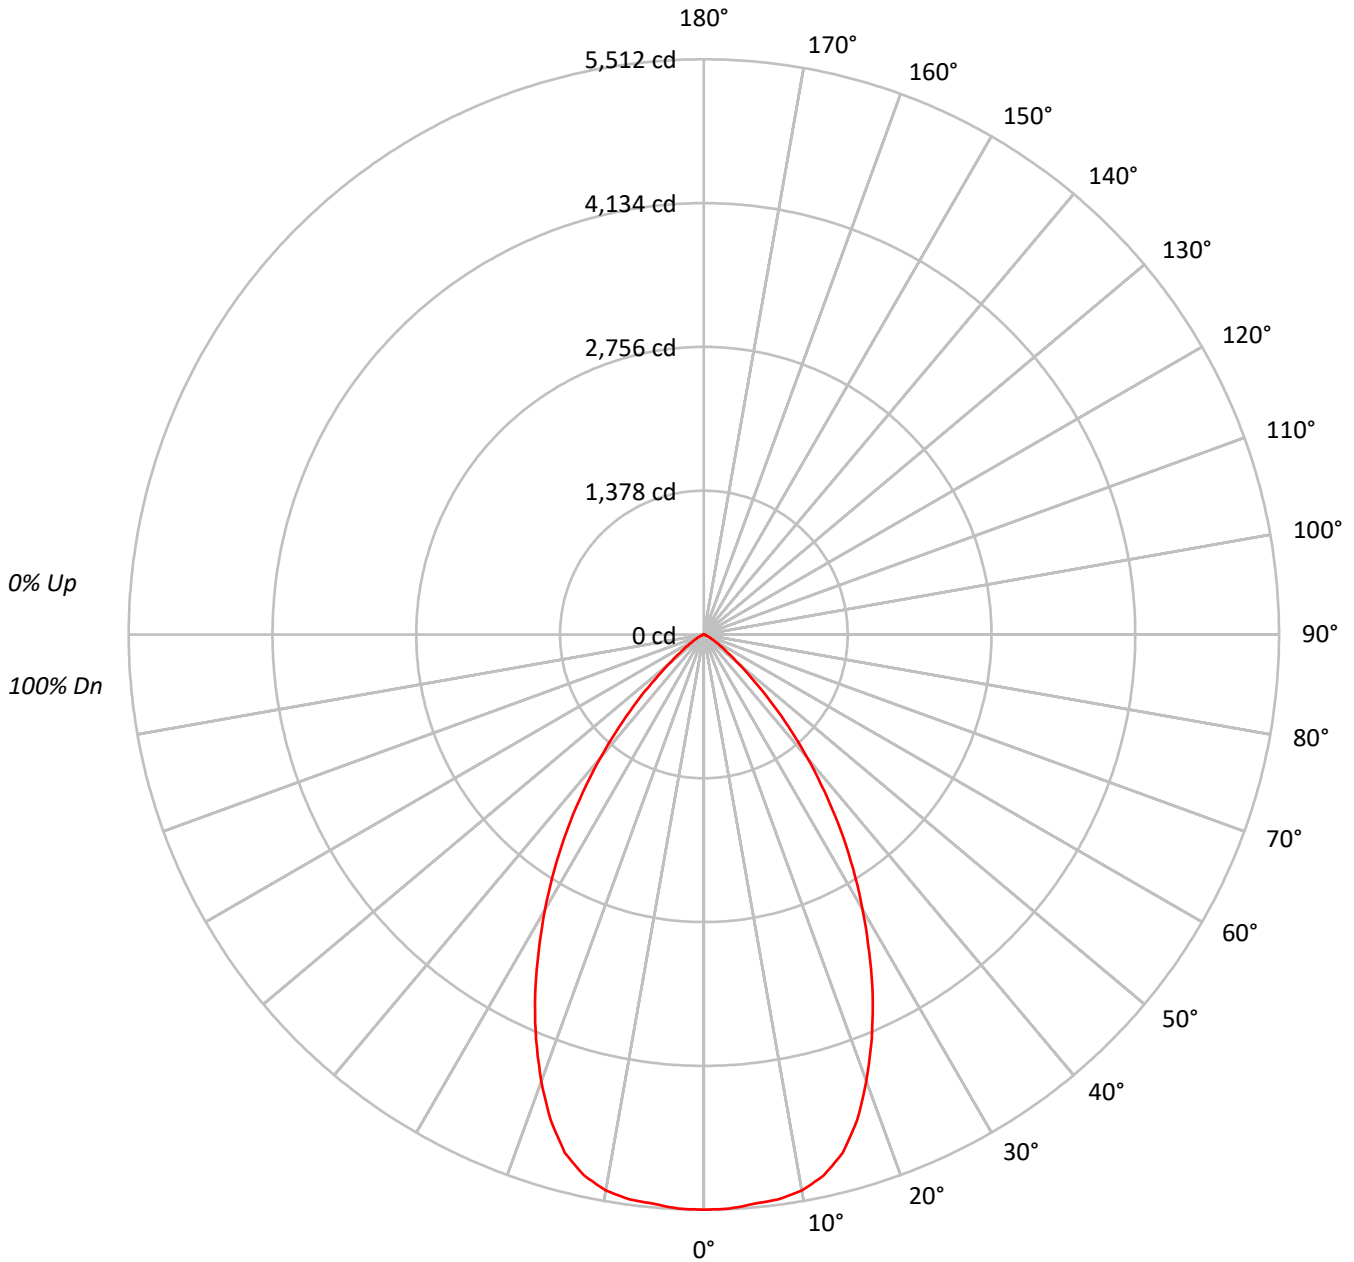



TEST NUMBER: P752043
 CATALOG NUMBER: LD4D65D010-EU4DR6555659050-4LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	321940
5°	321129
10°	320851
15°	310961
20°	283090
25°	246695
30°	205183
35°	162581
40°	117342
45°	74130
50°	38643
55°	20538
60°	10781
65°	5929
70°	2493
75°	2753
80°	1917
85°	1608

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 74130 cd/sqm



TEST NUMBER: P752043

CATALOG NUMBER: LD4D65D010-EU4DR6555659050-4LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	521.3	8.6
10°-20°	1427.5	23.5
20°-30°	1744.9	28.7
30°-40°	1415.7	23.3
40°-50°	705.5	11.6
50°-60°	196.8	3.2
60°-70°	44.7	0.7
70°-80°	11.7	0.2
80°-90°	3.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3693.6	60.8
0°-40°	5109.4	84.2
0°-60°	6011.7	99.0
0°-90°	6071.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6071.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5512	
5°	5478	521
15°	5143	1427
25°	3828	1745
35°	2280	1416
45°	898	705
55°	202	197
65°	43	45
75°	12	12
85°	2	3
90°	0	



TEST NUMBER: P752043

CATALOG NUMBER: LD4D65D010-EU4DR6555659050-4LBS1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	5512.3
2.5°	5508.3
5°	5477.5
7.5°	5459.6
10°	5410.2
12.5°	5309.8
15°	5142.9
17.5°	4882.1
20°	4554.8
22.5°	4201.7
25°	3828.2
27.5°	3428.9
30°	3042.5
32.5°	2661.0
35°	2280.3
37.5°	1900.3
40°	1539.1
42.5°	1200.5
45°	897.5
47.5°	625.3
50°	425.3
52.5°	293.2
55°	201.7
57.5°	136.1
60°	92.3
62.5°	64.0
65°	42.9
67.5°	21.9
70°	14.6
72.5°	13.8
75°	12.2
77.5°	8.1
80°	5.7
82.5°	4.1
85°	2.4
87.5°	1.6
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)