

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752119

Luminaire Tested: LD4D65D010-EU4DR7055659050-4LBDP1LI

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P752119  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D65D010-EU4DR7055659050-4LBDP1LI  
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7513.6 lumens  
Efficiency: N/A  
Efficacy: 103.2 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 72.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P752119  
CATALOG NUMBER: LD4D65D010-EU4DR7055659050-4LBDP1LI

### Luminous Intensity Polar Plot

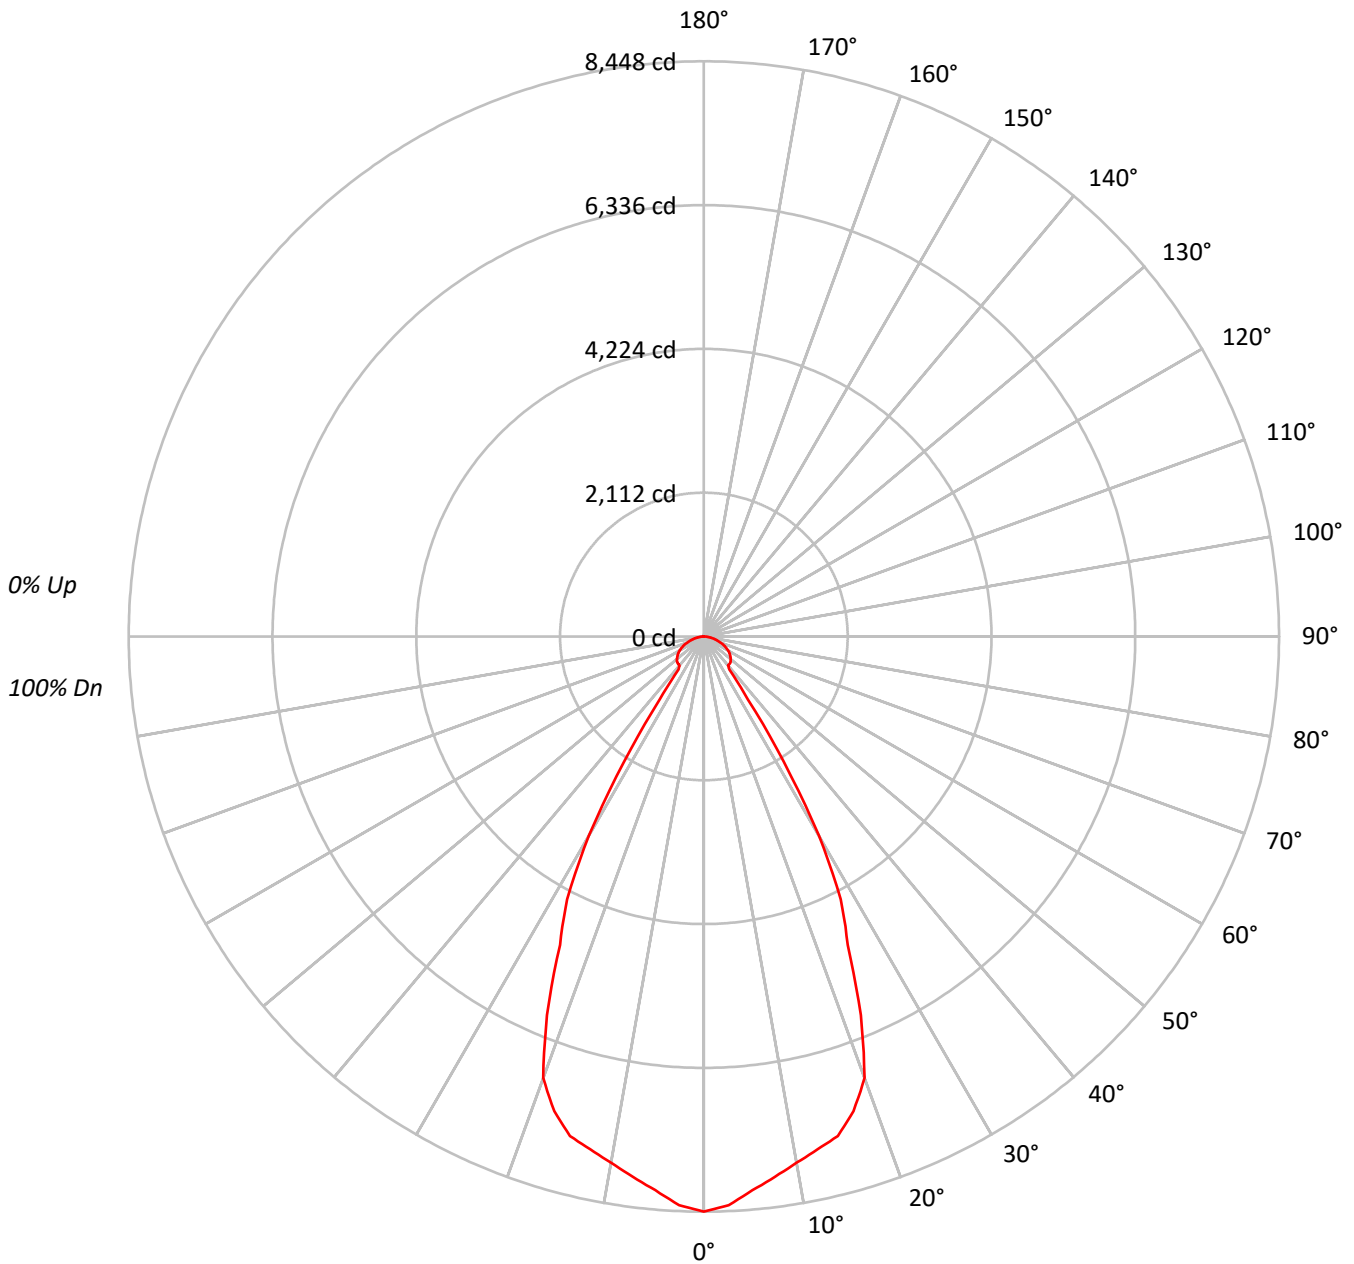



TEST NUMBER: P752119

CATALOG NUMBER: LD4D65D010-EU4DR7055659050-4LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	922980
5°	895555
10°	870595
15°	859165
20°	802283
25°	602719
30°	426067
35°	150923
40°	79359
45°	84521
50°	87522
55°	89169
60°	89725
65°	87824
70°	82899
75°	76789
80°	68143
85°	55285

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 57.5°  
 Luminance: 89759 cd/sqm



TEST NUMBER: P752119

CATALOG NUMBER: LD4D65D010-EU4DR7055659050-4LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	770.2	10.3
10°-20°	2112.5	28.1
20°-30°	2326.6	31.0
30°-40°	888.9	11.8
40°-50°	419.7	5.6
50°-60°	417.3	5.6
60°-70°	334.1	4.4
70°-80°	192.0	2.6
80°-90°	52.2	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5209.3	69.3
0°-40°	6098.3	81.2
0°-60°	6935.3	92.3
0°-90°	7513.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7513.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	8448	
5°	8165	770
15°	7596	2113
25°	5000	2327
35°	1132	889
45°	547	420
55°	468	417
65°	340	334
75°	182	192
85°	44	52
90°	0	



TEST NUMBER: P752119

CATALOG NUMBER: LD4D65D010-EU4DR7055659050-4LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	8447.5
2.5°	8359.2
5°	8165.3
7.5°	8003.5
10°	7847.0
12.5°	7714.6
15°	7595.5
17.5°	7308.0
20°	6900.0
22.5°	6020.0
25°	4999.5
27.5°	4352.1
30°	3377.1
32.5°	2181.4
35°	1131.5
37.5°	611.2
40°	556.4
42.5°	552.4
45°	547.0
47.5°	535.0
50°	514.9
52.5°	492.2
55°	468.1
57.5°	441.4
60°	410.6
62.5°	375.8
65°	339.7
67.5°	299.6
70°	259.5
72.5°	219.3
75°	181.9
77.5°	143.1
80°	108.3
82.5°	76.2
85°	44.1
87.5°	17.4
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)