

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P753224

Luminaire Tested: LD4D75BD010-EU4DR4570959024-4LBDP1LI

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P753224
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D75BD010-EU4DR4570959024-4LBDP1LI
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6606.4 lumens
Efficiency: N/A
Efficacy: 91.2 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P753224

CATALOG NUMBER: LD4D75BD010-EU4DR4570959024-4LBDP1LI

Luminous Intensity Polar Plot

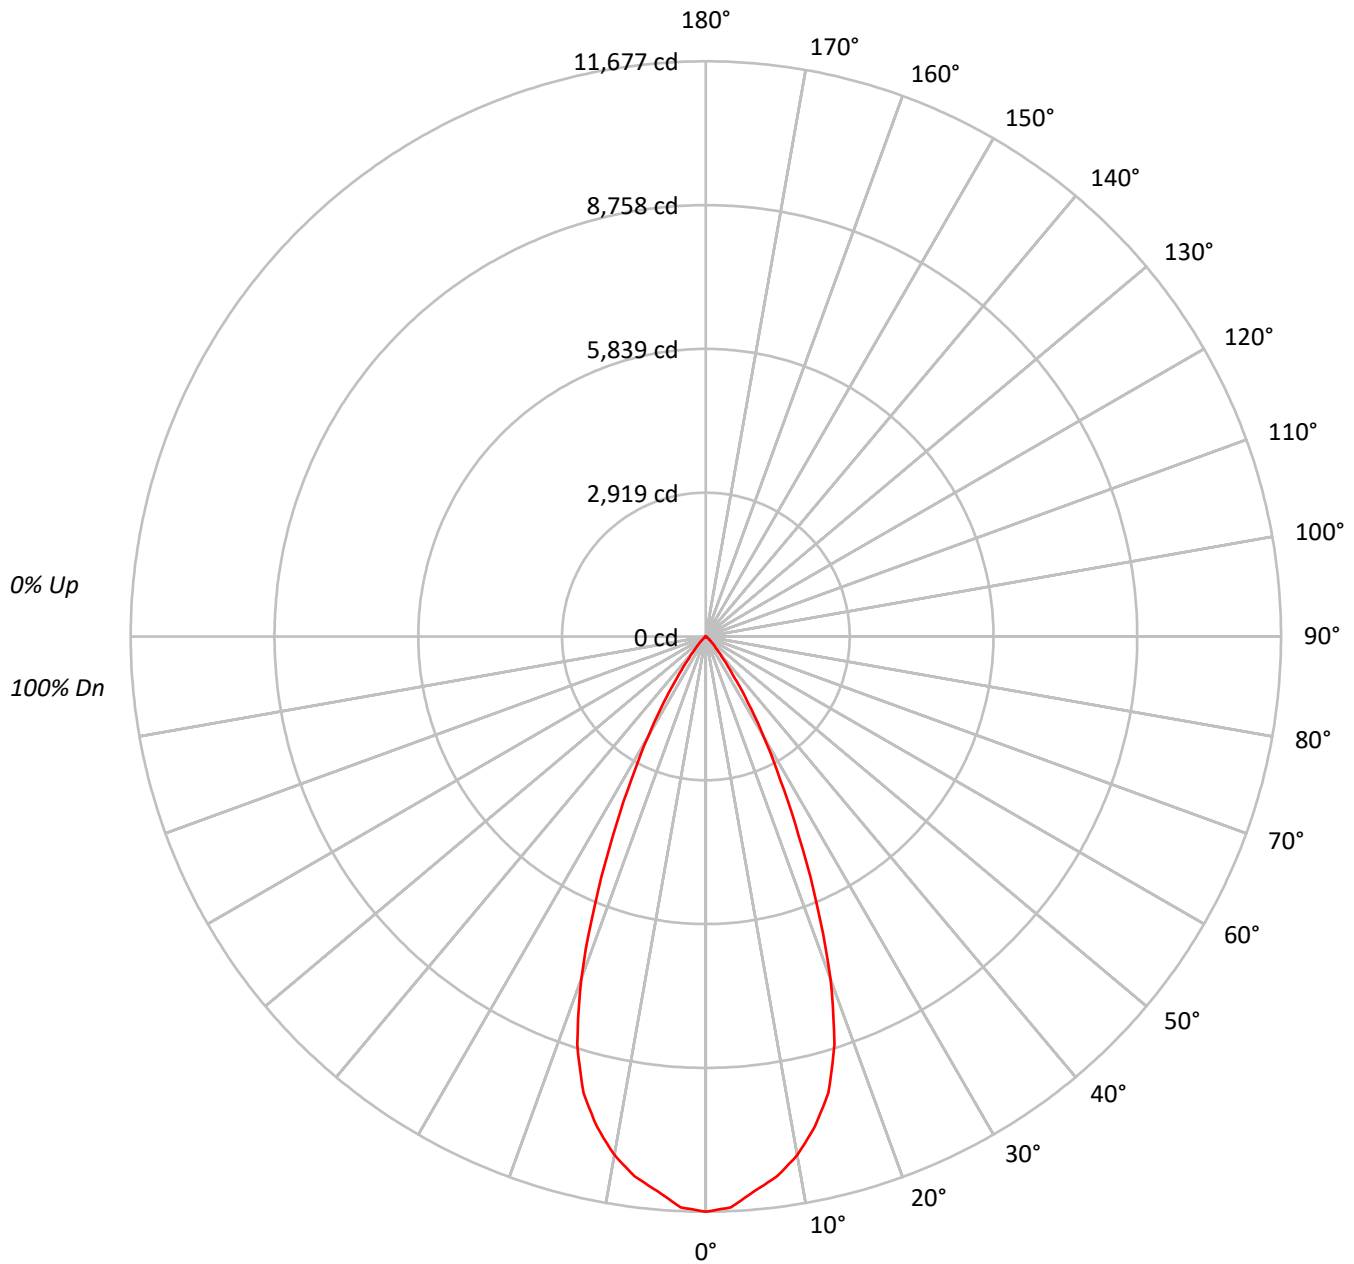

TEST NUMBER: P753224

CATALOG NUMBER: LD4D75BD010-EU4DR4570959024-4LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95		
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90		
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85		
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81		
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77		
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73		
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69		
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66		
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63		
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1275838
5°	1239516
10°	1185883
15°	1085328
20°	861047
25°	537559
30°	296282
35°	133036
40°	52402
45°	24692
50°	11712
55°	6115
60°	3016
65°	724
70°	288
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 24692 cd/sqm



TEST NUMBER: P753224

CATALOG NUMBER: LD4D75BD010-EU4DR4570959024-4LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1061.9	16.1
10°-20°	2613.4	39.6
20°-30°	2069.5	31.3
30°-40°	689.2	10.4
40°-50°	136.8	2.1
50°-60°	31.0	0.5
60°-70°	4.5	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5744.8	87.0
0°-40°	6434.0	97.4
0°-60°	6601.8	99.9
0°-90°	6606.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6606.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	11677	
5°	11301	###
15°	9595	2613
25°	4459	2070
35°	997	689
45°	160	137
55°	32	31
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P753224

CATALOG NUMBER: LD4D75BD010-EU4DR4570959024-4LBDP1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	11677.0
2.5°	11600.8
5°	11301.4
7.5°	11054.3
10°	10688.8
12.5°	10202.0
15°	9594.9
17.5°	8682.0
20°	7405.4
22.5°	5884.4
25°	4459.0
27.5°	3265.0
30°	2348.4
32.5°	1597.2
35°	997.4
37.5°	591.5
40°	367.4
42.5°	241.5
45°	159.8
47.5°	102.9
50°	68.9
52.5°	45.9
55°	32.1
57.5°	21.1
60°	13.8
62.5°	7.3
65°	2.8
67.5°	0.9
70°	0.9
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)