

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P753385

Luminaire Tested: LD4D75BD010-EU4DR5570959024-4LBS1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P753385
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-52)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D75BD010-EU4DR5570959024-4LBS1MW
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 55° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6282.7 lumens
Efficiency: N/A
Efficacy: 86.8 lumens/watt
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.87
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P753385

CATALOG NUMBER: LD4D75BD010-EU4DR5570959024-4LBS1MW

Luminous Intensity Polar Plot

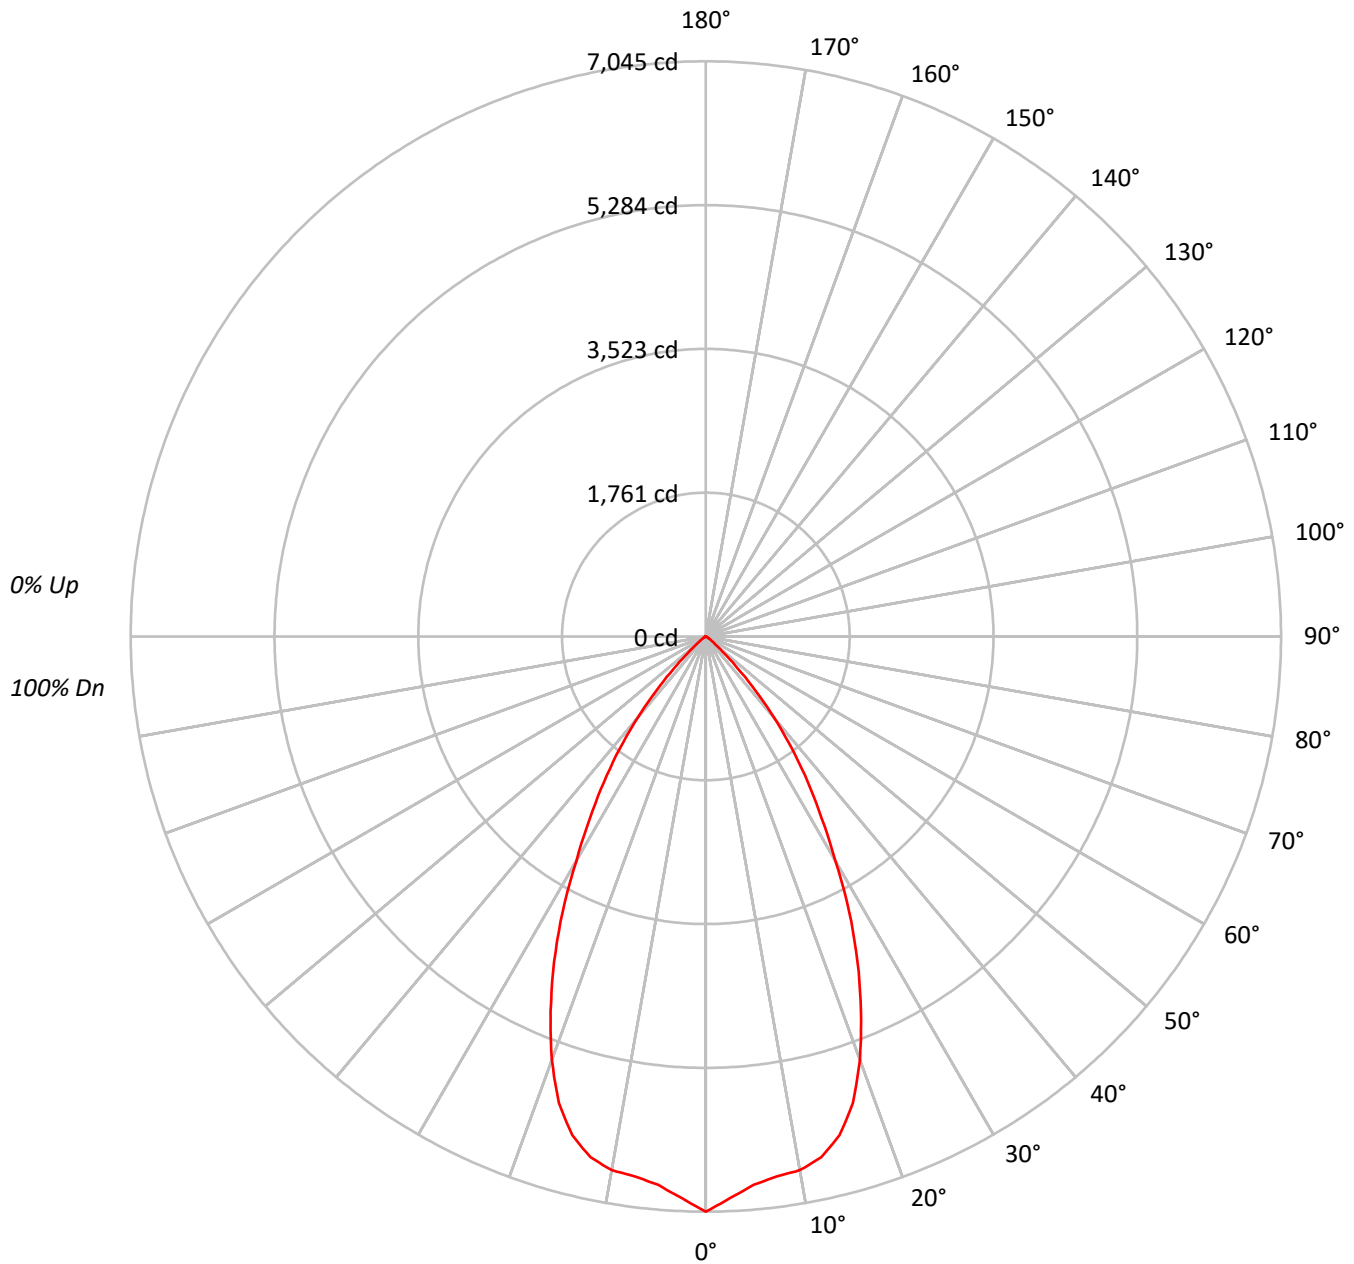



TEST NUMBER: P753385

CATALOG NUMBER: LD4D75BD010-EU4DR5570959024-4LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	108	106		111	109	106	104		105	103	101		101	99	98		97	96	95
2	108	103	99	96		106	101	98	95		98	95	92		95	93	90		92	90	89
3	102	96	91	87		100	95	90	86		92	88	85		90	86	84		87	85	82
4	97	90	84	80		95	88	83	79		86	82	78		84	81	78		82	79	77
5	92	84	78	74		91	83	77	73		81	76	73		79	75	72		78	74	71
6	88	79	73	68		86	78	72	68		76	71	68		75	70	67		74	70	67
7	83	74	68	64		82	73	67	63		72	67	63		71	66	63		70	65	62
8	79	69	63	59		78	69	63	59		68	63	59		67	62	59		66	62	58
9	75	66	60	56		74	65	59	55		64	59	55		63	58	55		62	58	55
10	72	62	56	52		71	61	56	52		61	56	52		60	55	52		59	55	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	769742
5°	739176
10°	736395
15°	715238
20°	641315
25°	530012
30°	400354
35°	290294
40°	185775
45°	84846
50°	27741
55°	11982
60°	5157
65°	672
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 84846 cd/sqm



TEST NUMBER: P753385

CATALOG NUMBER: LD4D75BD010-EU4DR5570959024-4LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	641.3	10.2
10°-20°	1750.2	27.9
20°-30°	1994.5	31.7
30°-40°	1357.8	21.6
40°-50°	467.9	7.4
50°-60°	64.7	1.0
60°-70°	6.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4386.1	69.8
0°-40°	5743.9	91.4
0°-60°	6276.4	99.9
0°-90°	6282.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6282.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7045	
5°	6740	641
15°	6323	1750
25°	4396	1995
35°	2176	1358
45°	549	468
55°	63	65
65°	3	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P753385

CATALOG NUMBER: LD4D75BD010-EU4DR5570959024-4LBS1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	7045.0
2.5°	6883.5
5°	6739.5
7.5°	6668.8
10°	6637.4
12.5°	6532.6
15°	6323.1
17.5°	5990.5
20°	5515.6
22.5°	4967.3
25°	4396.4
27.5°	3801.9
30°	3173.3
32.5°	2640.8
35°	2176.4
37.5°	1734.6
40°	1302.5
42.5°	902.7
45°	549.1
47.5°	295.9
50°	163.2
52.5°	96.9
55°	62.9
57.5°	40.2
60°	23.6
62.5°	10.5
65°	2.6
67.5°	0.9
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)