

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P753613

Luminaire Tested: LD4D75BD010-EU4DR7070959024-4LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P753613
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D75BD010-EU4DR7070959024-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6200.9 lumens
Efficiency: N/A
Efficacy: 85.6 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P753613

CATALOG NUMBER: LD4D75BD010-EU4DR7070959024-4LBDP1H

Luminous Intensity Polar Plot

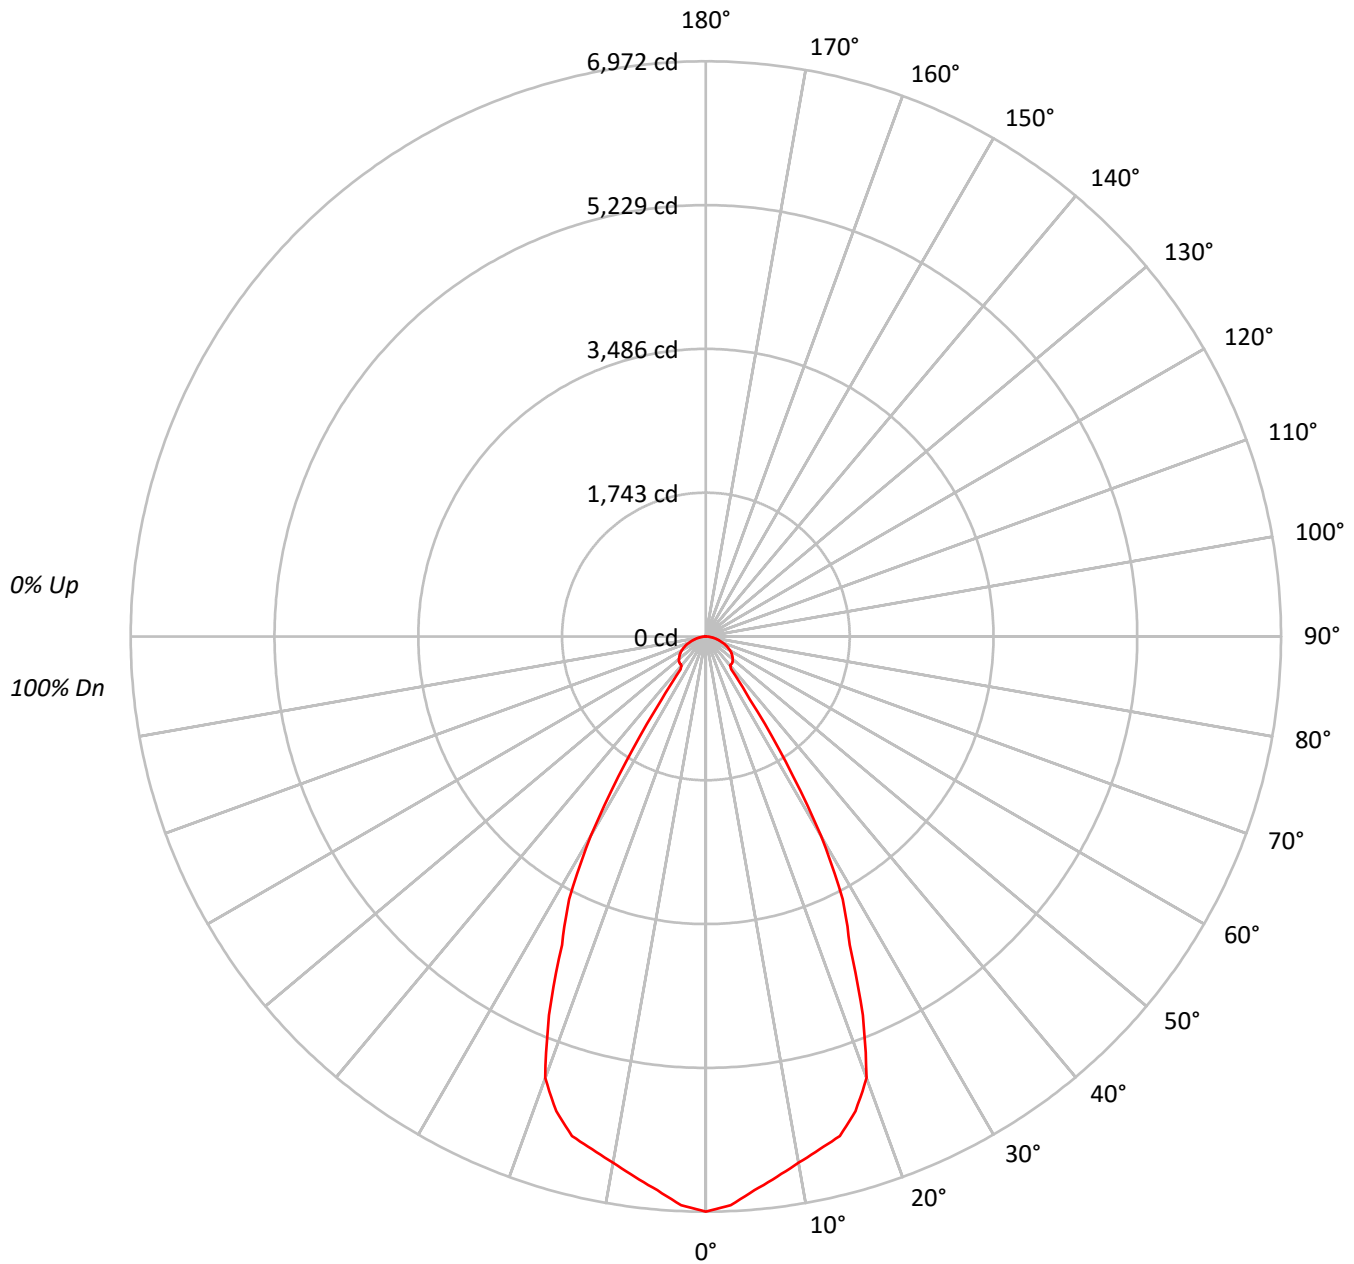



TEST NUMBER: P753613

CATALOG NUMBER: LD4D75BD010-EU4DR7070959024-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	761733
5°	739088
10°	718488
15°	709062
20°	662116
25°	497414
30°	351630
35°	124553
40°	65496
45°	69765
50°	72241
55°	73586
60°	74057
65°	72493
70°	68396
75°	63365
80°	56251
85°	45632

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 57.5°

Luminance: 74081 cd/sqm



TEST NUMBER: P753613

CATALOG NUMBER: LD4D75BD010-EU4DR7070959024-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	635.6	10.3
10°-20°	1743.4	28.1
20°-30°	1920.2	31.0
30°-40°	733.6	11.8
40°-50°	346.4	5.6
50°-60°	344.4	5.6
60°-70°	275.8	4.4
70°-80°	158.5	2.6
80°-90°	43.1	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4299.2	69.3
0°-40°	5032.8	81.2
0°-60°	5723.7	92.3
0°-90°	6200.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6200.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6972	
5°	6739	636
15°	6268	1743
25°	4126	1920
35°	934	734
45°	452	346
55°	386	344
65°	280	276
75°	150	158
85°	36	43
90°	0	



TEST NUMBER: P753613

CATALOG NUMBER: LD4D75BD010-EU4DR7070959024-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	6971.7
2.5°	6898.8
5°	6738.7
7.5°	6605.2
10°	6476.0
12.5°	6366.8
15°	6268.5
17.5°	6031.2
20°	5694.5
22.5°	4968.2
25°	4126.0
27.5°	3591.8
30°	2787.1
32.5°	1800.3
35°	933.8
37.5°	504.4
40°	459.2
42.5°	455.9
45°	451.5
47.5°	441.5
50°	425.0
52.5°	406.2
55°	386.3
57.5°	364.3
60°	338.9
62.5°	310.2
65°	280.4
67.5°	247.3
70°	214.1
72.5°	181.0
75°	150.1
77.5°	118.1
80°	89.4
82.5°	62.9
85°	36.4
87.5°	14.3
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)