

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P753619

Luminaire Tested: LD4D75BD010-EU4DR7070959024-4LBS1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P753619
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D75BD010-EU4DR7070959024-4LBS1MW
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6198.2 lumens
Efficiency: N/A
Efficacy: 85.6 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P753619

CATALOG NUMBER: LD4D75BD010-EU4DR7070959024-4LBS1MW

Luminous Intensity Polar Plot

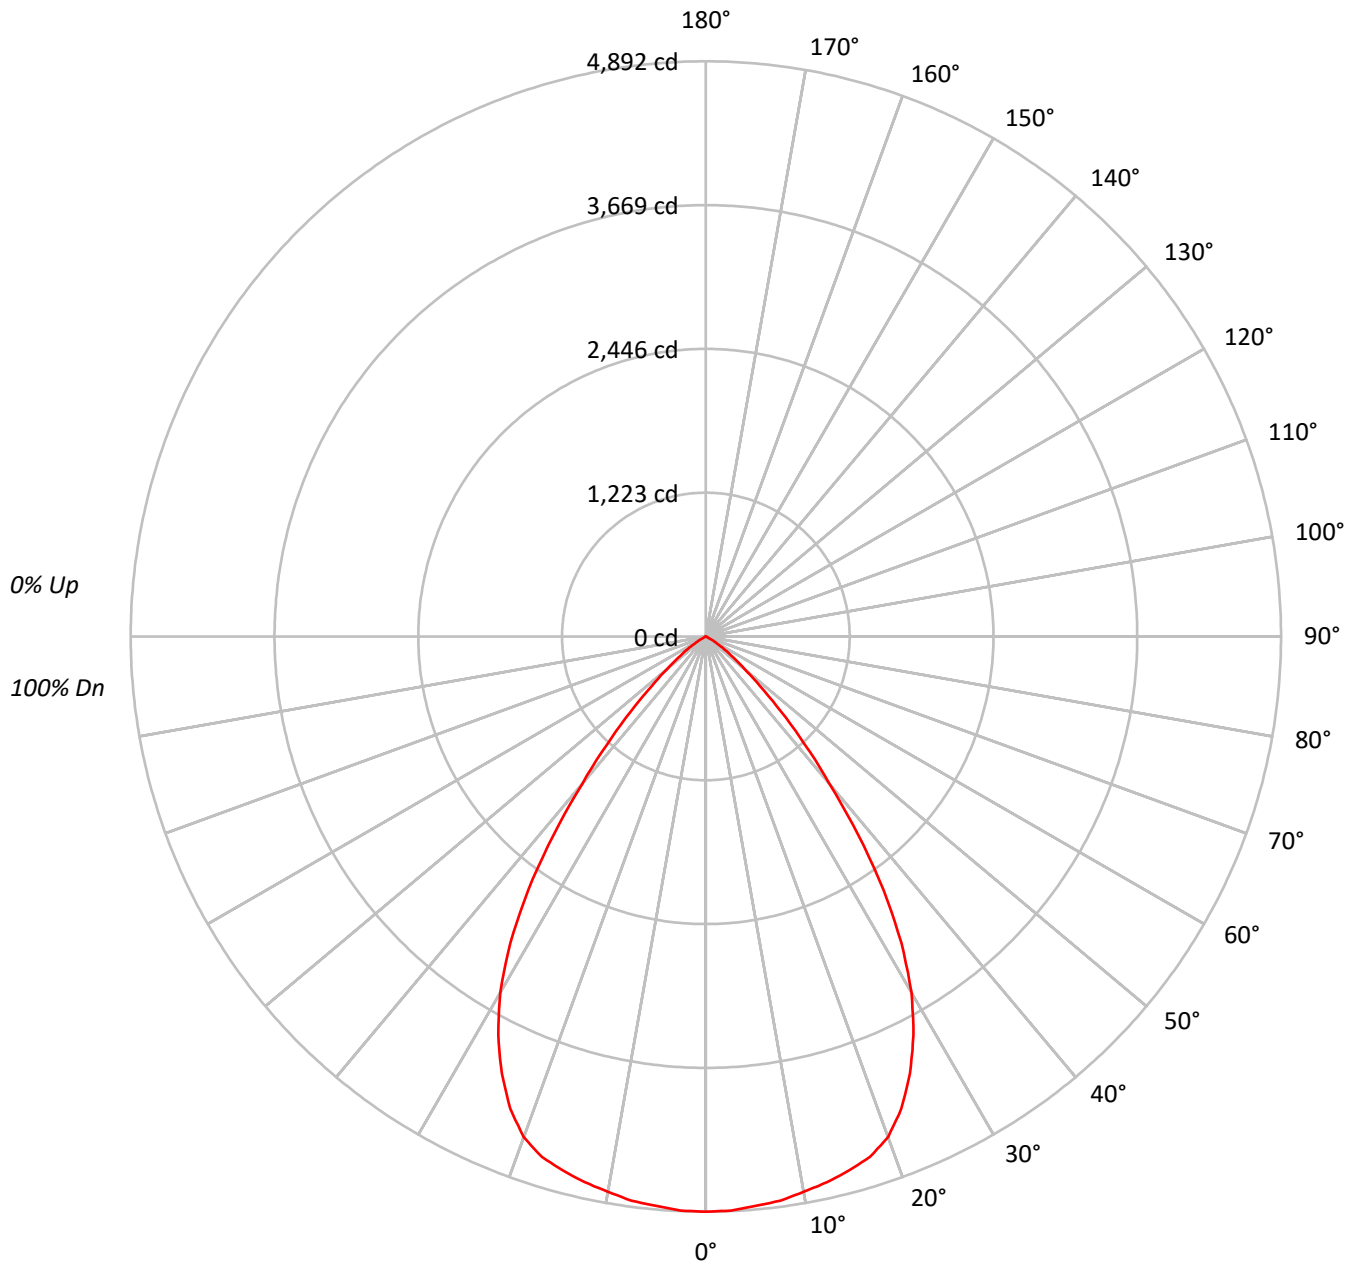



TEST NUMBER: P753619

CATALOG NUMBER: LD4D75BD010-EU4DR7070959024-4LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	97	94	105	100	96	92	97	93	90		94	91	88		91
3	101	94	88	84	99	92	87	83	90	85	82		87	84	81		85
4	95	87	81	76	93	86	80	76	83	78	75		81	77	74		79
5	89	80	74	69	88	79	73	69	78	72	68		76	71	68		74
6	84	75	68	63	83	74	68	63	72	67	63		71	66	62		69
7	80	69	63	58	78	69	62	58	67	62	58		66	61	57		65
8	75	65	58	54	74	64	58	54	63	57	53		62	57	53		61
9	71	61	54	50	70	60	54	50	59	53	50		58	53	49		57
10	67	57	50	46	66	56	50	46	55	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	534515
5°	533189
10°	532032
15°	531878
20°	526681
25°	494749
30°	441067
35°	351664
40°	233513
45°	139607
50°	72377
55°	38041
60°	13461
65°	233
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 139607 cd/sqm



TEST NUMBER: P753619

CATALOG NUMBER: LD4D75BD010-EU4DR7070959024-4LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	462.3	7.5
10°-20°	1325.9	21.4
20°-30°	1870.5	30.2
30°-40°	1614.7	26.1
40°-50°	723.1	11.7
50°-60°	189.3	3.1
60°-70°	12.3	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3658.7	59.0
0°-40°	5273.4	85.1
0°-60°	6185.8	99.8
0°-90°	6198.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6198.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4892	
5°	4861	462
15°	4702	1326
25°	4104	1870
35°	2636	1615
45°	904	723
55°	200	189
65°	1	12
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P753619

CATALOG NUMBER: LD4D75BD010-EU4DR7070959024-4LBS1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	4892.1
2.5°	4886.9
5°	4861.4
7.5°	4840.2
10°	4795.4
12.5°	4754.9
15°	4702.1
17.5°	4641.4
20°	4529.7
22.5°	4345.8
25°	4103.9
27.5°	3823.3
30°	3496.0
32.5°	3095.7
35°	2636.5
37.5°	2129.8
40°	1637.2
42.5°	1243.9
45°	903.5
47.5°	622.8
50°	425.8
52.5°	293.8
55°	199.7
57.5°	120.5
60°	61.6
62.5°	19.4
65°	0.9
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)