

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752927

Luminaire Tested: LD4D75BD010-EU4DR2570959027-4LBS1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P752927
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D75BD010-EU4DR2570959027-4LBS1B
Description: 4 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 25° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6127.4 lumens
Efficiency: N/A
Efficacy: 84.6 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.45
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P752927

CATALOG NUMBER: LD4D75BD010-EU4DR2570959027-4LBS1B

Luminous Intensity Polar Plot

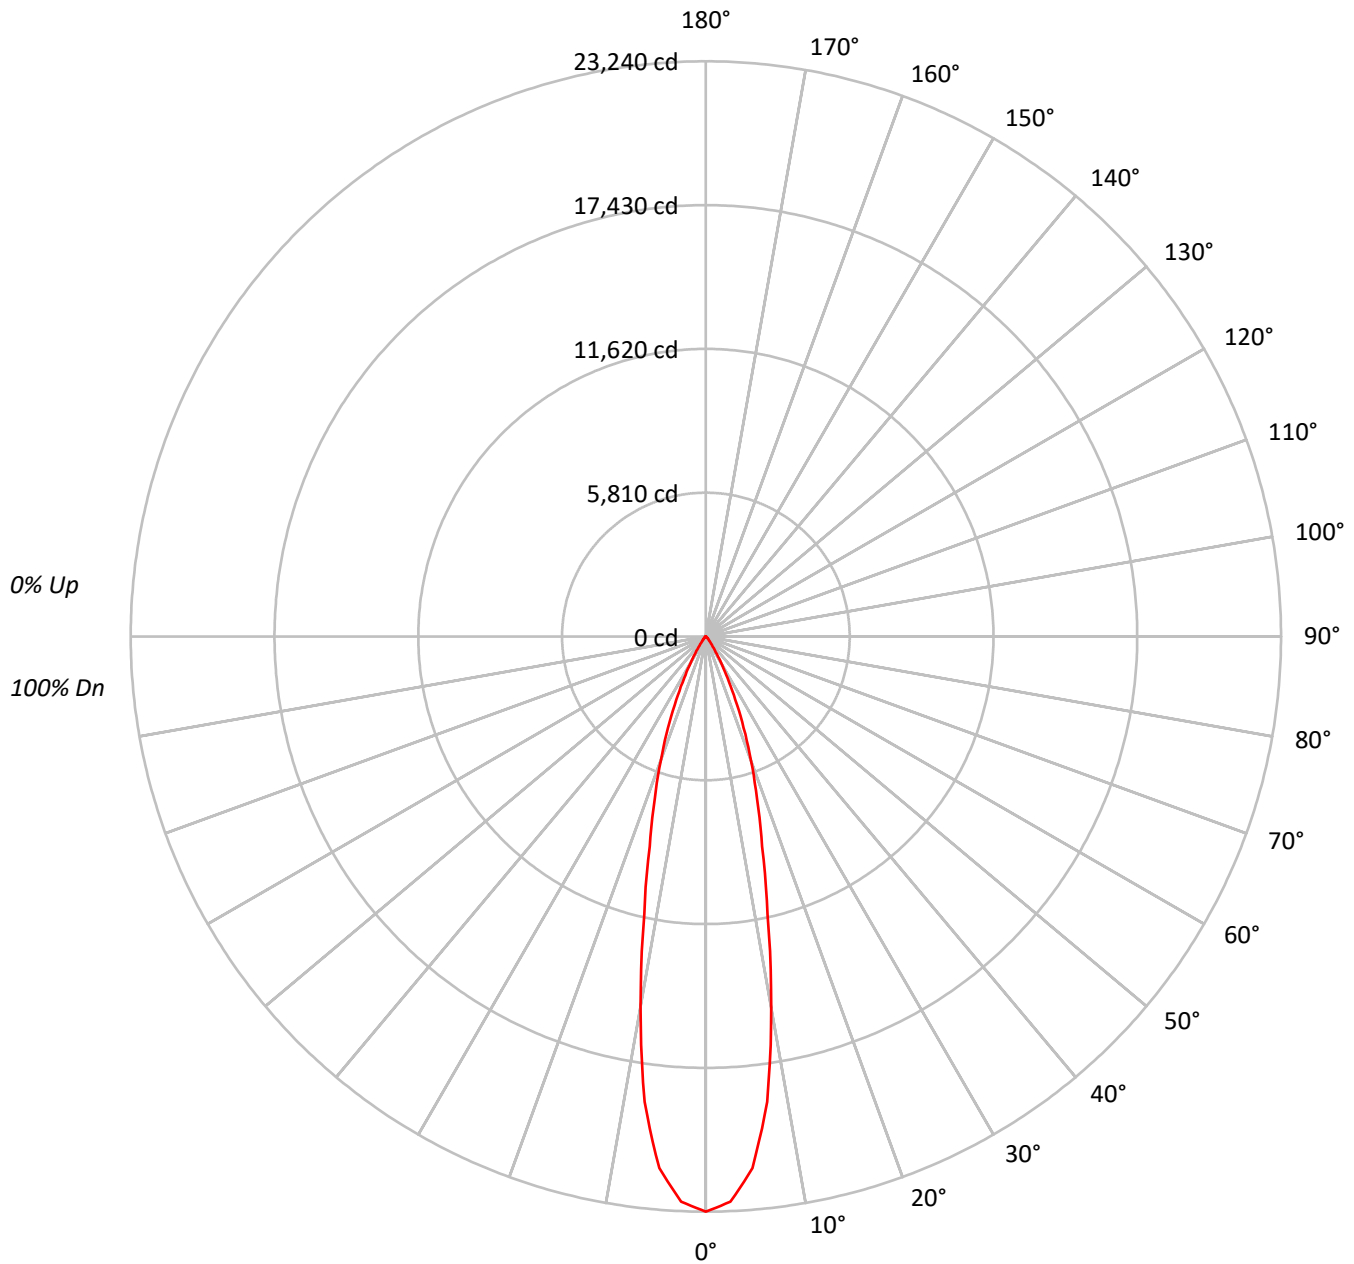

TEST NUMBER: P752927

CATALOG NUMBER: LD4D75BD010-EU4DR2570959027-4LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10		50	30	10			50	30	10			50
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111			106	106	106			102
1	115	113	111	109	112	110	109	107		106	105	104			103	102	101			99
2	111	107	104	101	109	105	102	100		102	100	98			99	97	96			97
3	107	102	98	95	105	101	97	94		98	95	93			96	93	91			94
4	103	97	93	90	102	96	93	90		94	91	89			93	90	88			91
5	100	93	89	86	98	93	89	86		91	87	85			89	86	84			88
6	97	90	85	82	95	89	85	82		88	84	81			87	83	81			85
7	93	87	82	79	92	86	82	79		85	81	78			84	80	78			83
8	91	84	79	76	90	83	79	76		82	78	76			81	78	75			80
9	88	81	76	73	87	80	76	73		80	76	73			79	75	73			78
10	85	78	74	71	85	78	74	71		77	73	71			76	73	71			76

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2539209
5°	2364956
10°	1686983
15°	993569
20°	618211
25°	339280
30°	155156
35°	58768
40°	26615
45°	15993
50°	6646
55°	4286
60°	2994
65°	2017
70°	319
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 15993 cd/sqm



TEST NUMBER: P752927

CATALOG NUMBER: LD4D75BD010-EU4DR2570959027-4LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1853.1	30.2
10°-20°	2509.9	41.0
20°-30°	1328.2	21.7
30°-40°	327.9	5.4
40°-50°	80.0	1.3
50°-60°	21.1	0.3
60°-70°	7.0	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5691.3	92.9
0°-40°	6019.2	98.2
0°-60°	6120.2	99.9
0°-90°	6127.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6127.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	23240	
5°	21563	###
15°	8784	2510
25°	2814	1328
35°	441	328
45°	104	80
55°	22	21
65°	8	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P752927

CATALOG NUMBER: LD4D75BD010-EU4DR2570959027-4LBS1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	23239.9
2.5°	22858.0
5°	21562.7
7.5°	18960.4
10°	15205.4
12.5°	11494.4
15°	8783.7
17.5°	6845.7
20°	5316.9
22.5°	3987.4
25°	2814.3
27.5°	1887.2
30°	1229.8
32.5°	748.3
35°	440.6
37.5°	269.6
40°	186.6
42.5°	142.6
45°	103.5
47.5°	62.5
50°	39.1
52.5°	28.3
55°	22.5
57.5°	17.6
60°	13.7
62.5°	10.7
65°	7.8
67.5°	2.9
70°	1.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)